



BC846AW ~ BC850CW

NPN GENERAL PURPOSE TRANSISTORS

VOLTAGE 30/45/65 Volts **CURRENT** 150 mWatts

FEATURES

- General purpose amplifier applications
- NPN epitaxial silicon, planar design
- Collector current IC = 100mA
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: SOT-323, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0001 ounce, 0.005 gram





Fig.34

SOT-323

Unit : inch(mm)

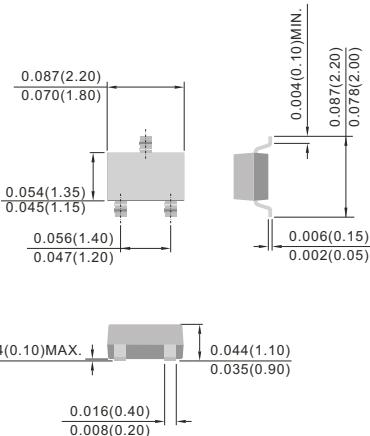

Device Marking:

BC846AW=46A	BC847AW=47A	BC848AW=48A		
BC846BW=46B	BC847BW=47B	BC848BW=48B	BC849BW=49B	BC850BW=50B
	BC847CW=47C	BC848CW=48C	BC849CW=49C	BC850CW=50C

ABSOLUTE RATINGS

PARAMETER	Symbol	Value	Units
Collector - Emitter Voltage	V _{CEO}	65 45 30	V
Collector - Base Voltage	V _{CBO}	80 50 30	V
Emitter - Base Voltage	V _{EBO}	6.0 6.0 5.0	V
Collector Current - Continuous	I _C	100	mA

THERMAL CHARACTERISTICS

PARAMETER	Symbol	Value	Units
Max Power Dissipation (Note 1)	P _{TOT}	150	mW
Thermal Resistance	R _{JA} R _{JC}	400 100	°C/W
Junction Temperature	T _J	-55 to 150	°C
Storage Temperature	T _{STG}	-55 to 150	°C

Note 1: Transistor mounted on FR-5 board 1.0 x 0.75 x 0.062 in.



BC846AW ~ BC850CW

ELECTRICAL CHARACTERISTICS

PARAMETER	Symbol	Test Condition	MIN.	TYP.	MAX.	Units
Collector - Emitter Breakdown Voltage BC846AW,BW BC847AW/BW/CW,BC850BW/CW BC848AW/BW/CW,BC849BW/CW	$V_{(BR)}CEO$	$IC=10mA, IB=0$	65 45 30	-	-	V
Collector - Base Breakdown Voltage BC846AW,BW BC847AW/BW/CW,BC850BW/CW BC848AW/BW/CW,BC849BW/CW	$V_{(BR)}CBO$	$IC=10\mu A, IE=0$	80 50 30	-	-	V
Emitter - Base Breakdown Voltage BC846AW,BW BC847AW/BW/CW,BC850BW/CW BC848AW/BW/CW,BC849BW/CW	$V_{(BR)}EBO$	$IE=10\mu A, IC=0$	6.0 6.0 5.0	-	-	V
Emitter-Base Cutoff Current	I_{EBO}	$VEB=5$	-	-	100	nA
Collector-Base Cutoff Current	I_{CBO}	$VCB=30V, IE=0$ $VCB=30V, IE=0, T_J=150^{\circ}C$	-	-	15 5.0	nA μA
DC Current Gain BC846~BC848 Suffix "AW" BC846~BC850 Suffix "BW" BC847~BC850 Suffix "CW"	h_{FE}	$IC=10\mu A, VCE=5V$	-	90 150 270	-	-
DC Current Gain BC846~BC848 Suffix "AW" BC846~BC850 Suffix "BW" BC847~BC850 Suffix "CW"	h_{FE}	$IC=2.0mA, VCE=5V$	110 200 420	180 290 520	220 450 800	-
Collector - Emitter Saturation Voltage	$V_{CE(SAT)}$	$IC=10mA, IB=0.5mA$ $IC=100mA, IB=5.0mA$	-	-	0.25 0.6	V
Base - Emitter Saturation Voltage	$V_{CE(SAT)}$	$IC=10mA, IB=0.5mA$ $IC=100mA, IB=5.0mA$	-	0.7 0.9	-	V
Base - Emitter Voltage	$V_{CE(SAT)}$	$IC=2mA, VCE=5.0V$ $IC=10mA, VCE=5.0V$	0.58 -	0.660 -	0.70 0.77	V
Collector - Base Capacitance	C_{CBO}	$VCB=10V, IE=0, f=1MH$	-	-	4.5	pF



BC846AW ~ BC850CW

ELECTRICAL CHARACTERISTICS CURVE (BC846AW,BC847AW,BC848AW)

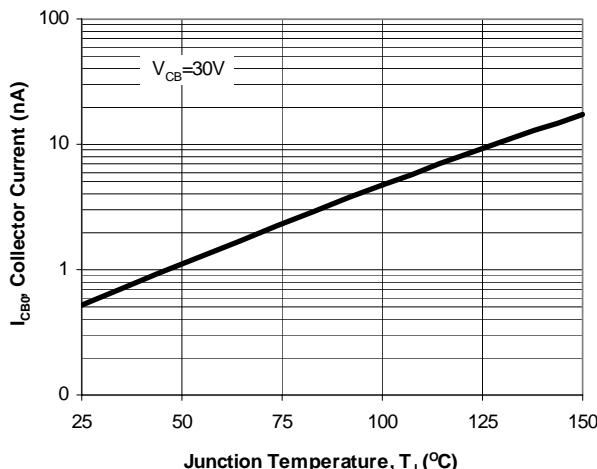


Fig. 1. Typical I_{CB0} vs. Junction Temperature

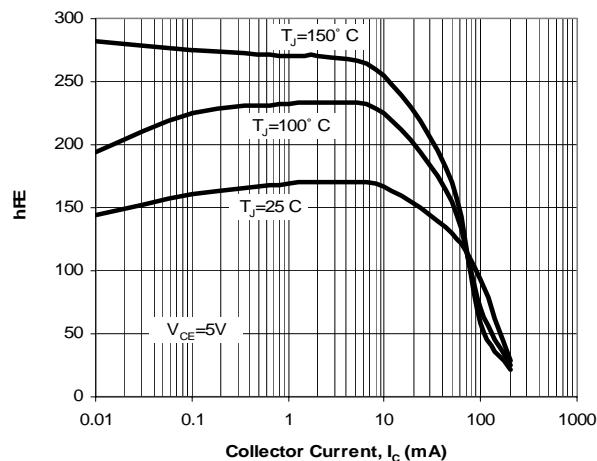


Fig. 2. Typical h_{FE} vs. Collector Current

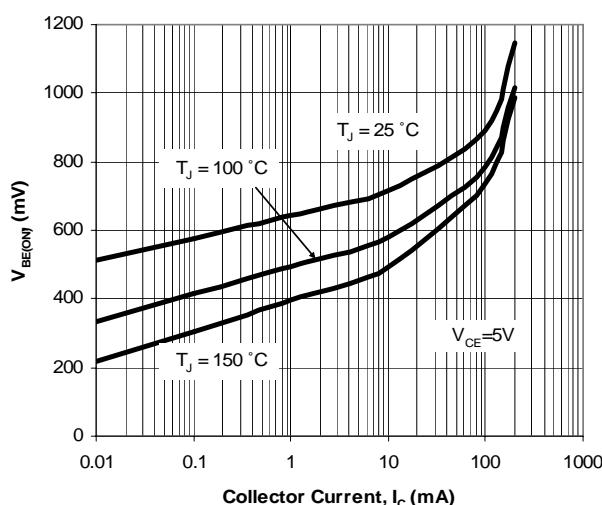


Fig. 3. Typical $V_{BE(ON)}$ vs. Collector Current

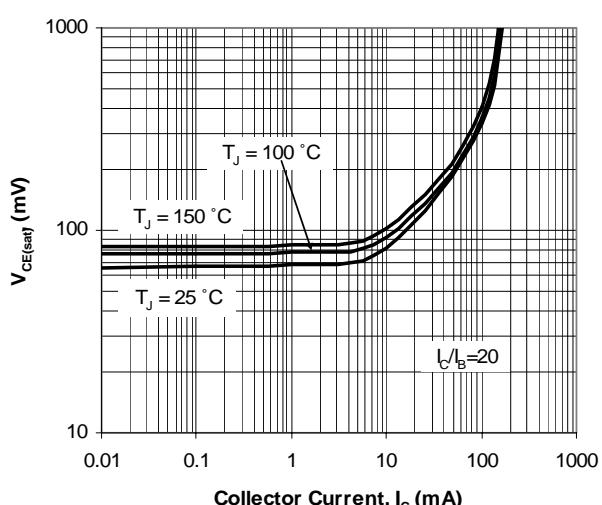


Fig. 4. Typical $V_{CE(SAT)}$ vs. Collector Current

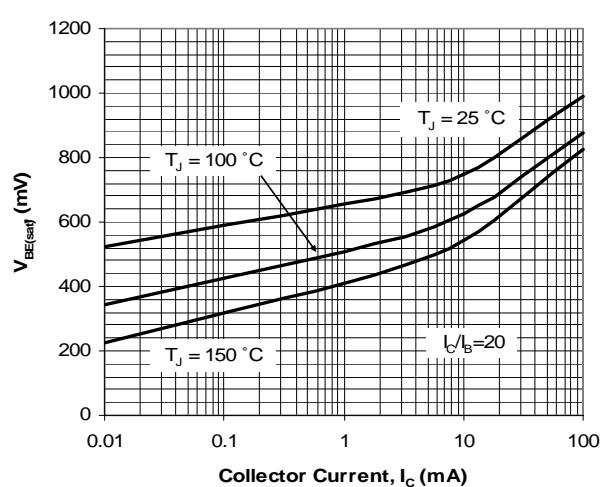


Fig. 5. Typical $V_{BE(SAT)}$ vs. Collector Current

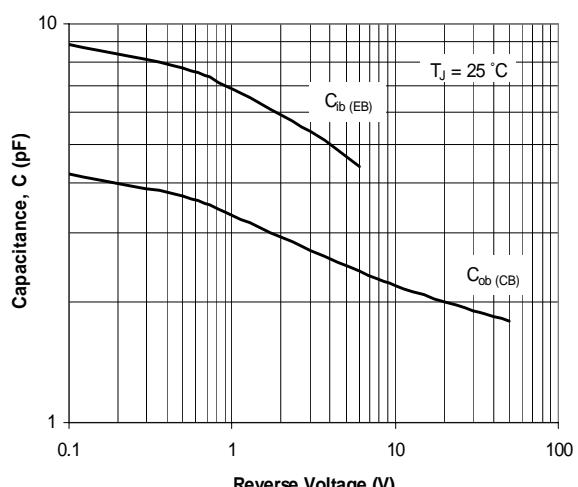


Fig. 6. Typical Capacitances vs. Reverse Voltage



BC846AW ~ BC850CW

ELECTRICAL CHARACTERISTICS CURVE (BC846BW,BAC847BW,BC848BW,BC849BW,BC850BW)

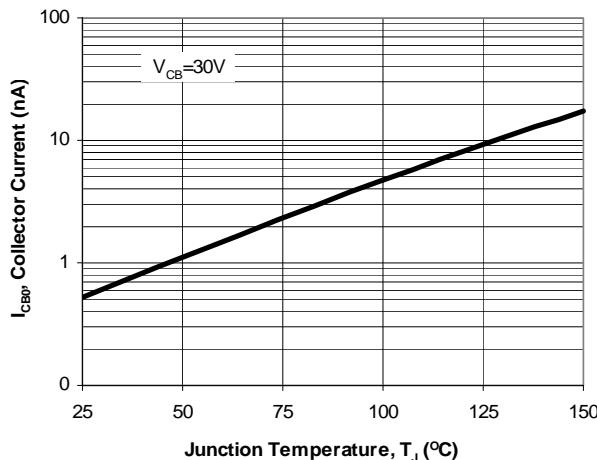


Fig. 1. Typical I_{CBO} vs. Junction Temperature

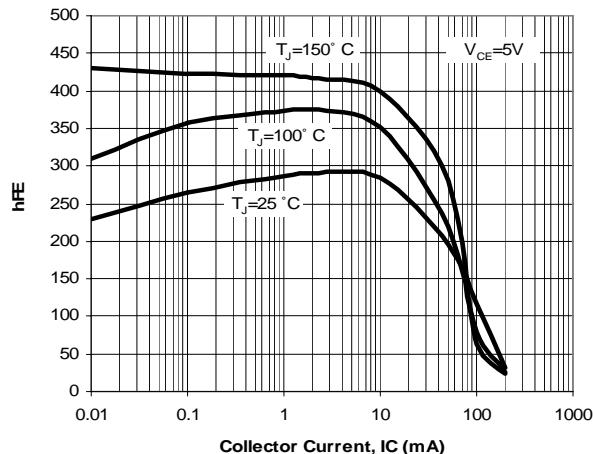


Fig. 2. Typical h_{FE} vs. Collector Current

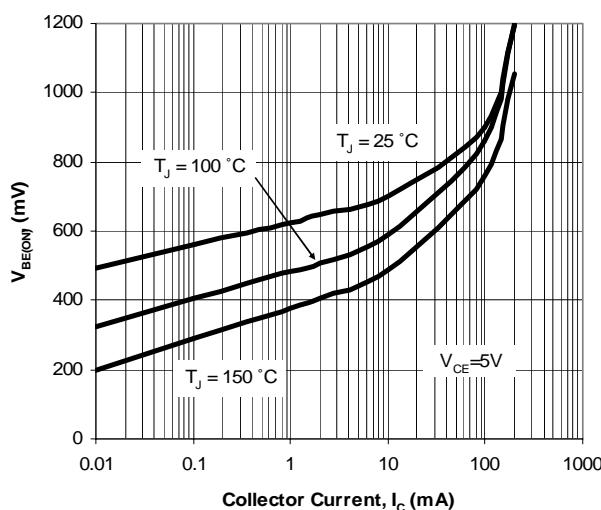


Fig. 3. Typical $V_{BE(ON)}$ vs. Collector Current

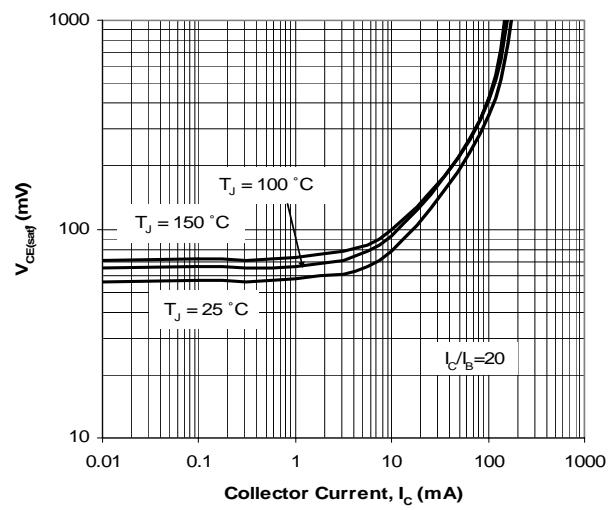


Fig. 4. Typical $V_{CE(sat)}$ vs. Collector Current

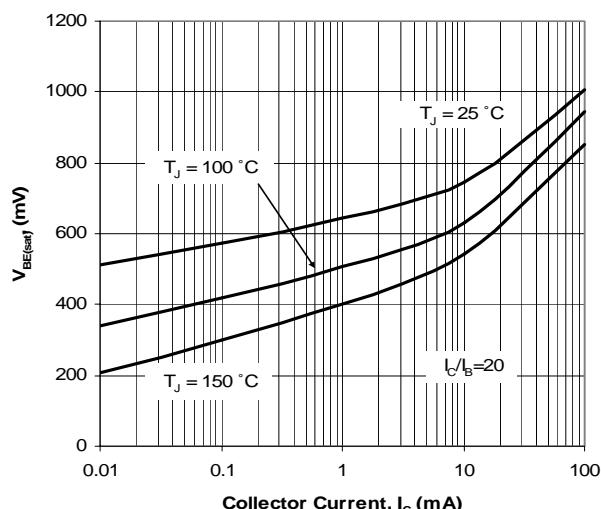


Fig. 5. Typical $V_{BE(sat)}$ vs. Collector Current

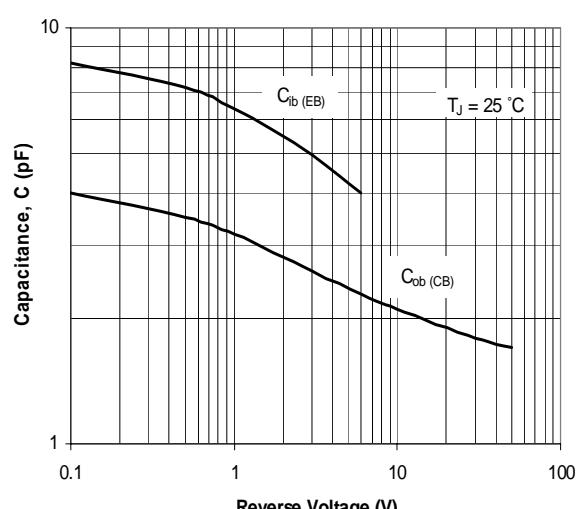


Fig. 6. Typical Capacitances vs. Reverse Voltage



BC846AW ~ BC850CW

ELECTRICAL CHARACTERISTICS CURVE (BAC847CW,BC848CW,BC849CW,BC850CW)

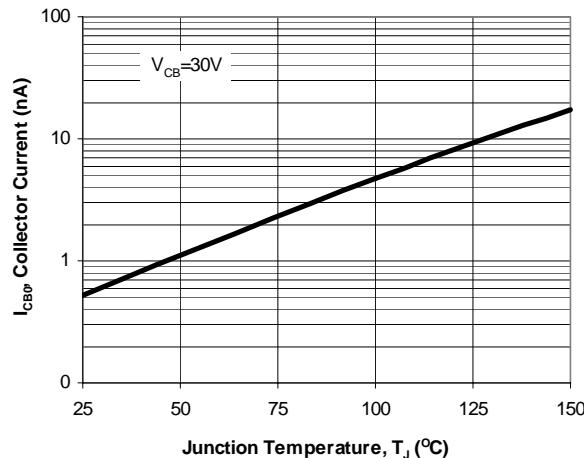


Fig. 1. Typical I_{CBO} vs. Junction Temperature

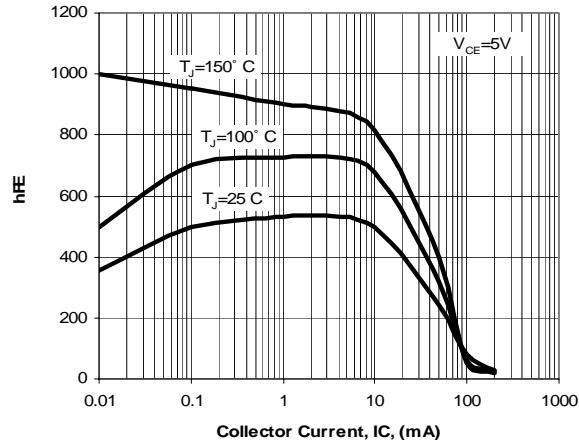


Fig. 2. Typical h_{FE} vs. Collector Current

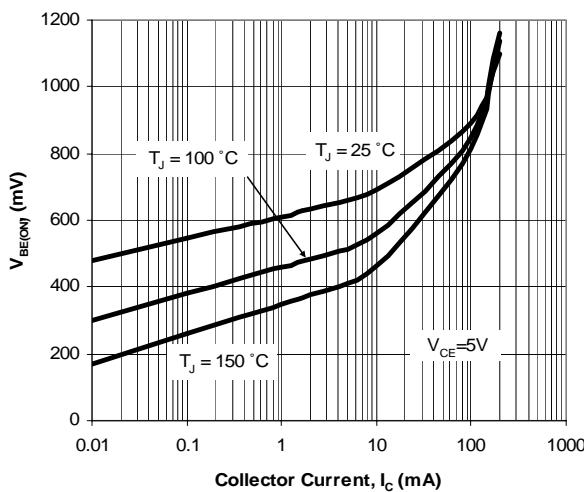


Fig. 3. Typical $V_{BE(ON)}$ vs. Collector Current

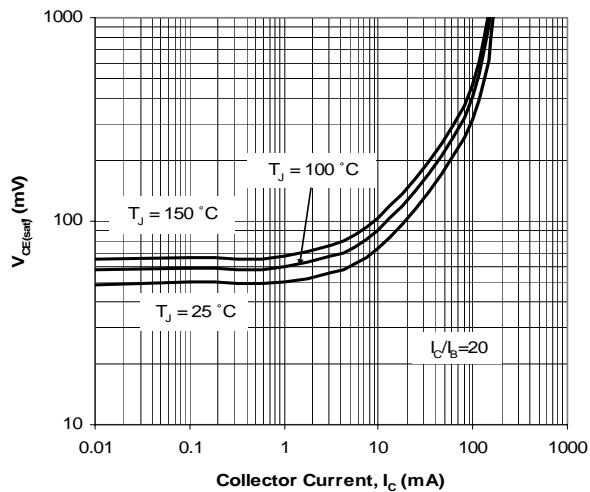


Fig. 4. Typical $V_{CE(SAT)}$ vs. Collector Current

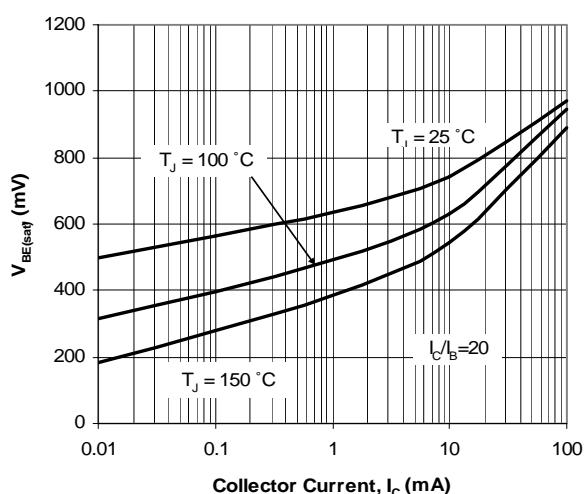


Fig. 5. Typical $V_{BE(SAT)}$ vs. Collector Current


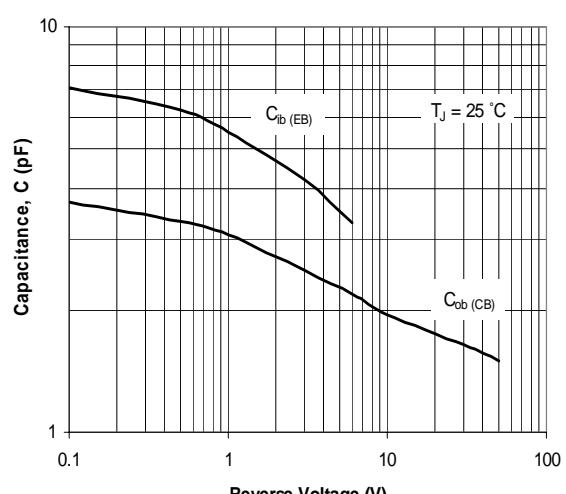


Fig. 6. Typical Capacitances vs. Reverse Voltage



BC846AW ~ BC850CW

MOUNTING PAD LAYOUT

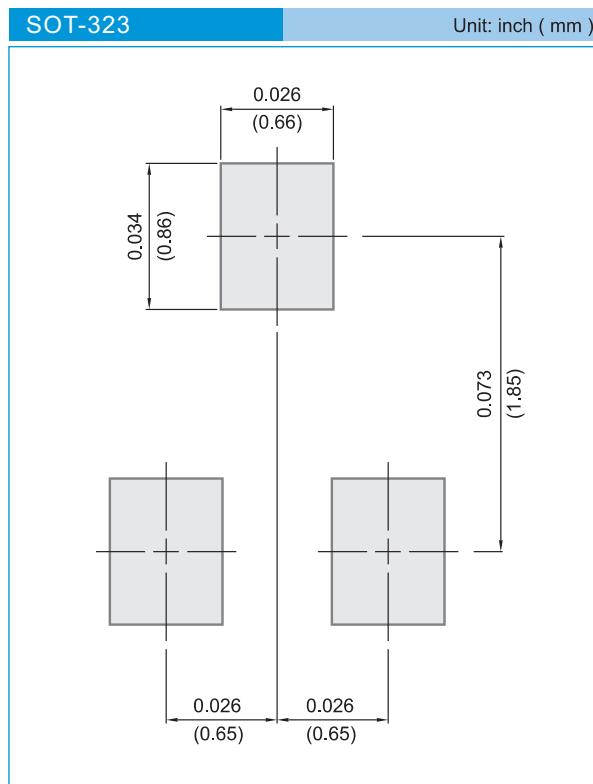

ORDER INFORMATION

- Packing information
 T/R - 12K per 13" plastic Reel
 T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2010

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.