

C-13-155(C)-T(3)-SSC7(9)



Features

- Duplex SC Single Mode Transceiver
- Industry Standard 1x9 Footprint
- Long reach SONET OC-3 SDH STM-1 Compliant
- Single +5V/ 3.3V Power Supply
- PECL Differential Inputs and Outputs
- Wave Solderable and Aqueous Washable
- LED Multisourced 1x9 Transceiver Interchangeable
- Class 1 Laser Int. Safety Standard IEC 825 Compliant
- Uncooled Laser Diode with MQW Structure
- Complies with Telcordia (Bellcore) GR-468-CORE
- ATM 155 Mbps links Application
- SONET/SDH Equipment Interconnect Application

Absolute Maximum Rating

Parameter	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V_{CC}	0	6	V	
Output Current	I_{out}	0	30	mA	
Soldering Temperature	-	-	240	°C	10 seconds on leads only
Operating Temperature	T_{opr}	0	70	°C	C-13-155-T(3)-SSC7(9)(D/E)
Operating temperature	T_{opr}	-40	85	°C	C-13-155-T(3)-SSC7(9)A(B/C)
Storage Temperature	T_{stg}	-40	85	°C	

Recommended Operating Condition

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power Supply Voltage	V_{CC}	4.75	5	5.25	V
Power Supply Voltage	V_{CC}	3.1	3.3	3.5	V
Data Rate		-	155	-	Mbps

Transmitter Specifications, (-40< T_{opr} <85°C, 4.75V< V_{CC} <5.25V)

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Optical						
Optical Transmit Power	P_o	-3	-	+3	dBm	Output power is coupled into a 9/125 μ m single mode fiber C-13-155-T(3)-SSC7(A/B/C/D/E)
Optical Transmit Power	P_o	0	-	+5	dBm	Output power is coupled into a 9/125 μ m single mode fiber C-13-155-T(3)-SSC9(A/B/C/D/E)
Output Center Wavelength	λ	1290	1310	1330	nm	25°C
Output Spectrum Width	$\Delta\lambda$	-	-	5	nm	RMS(σ)
Extinction Ratio	ER	8.2	-	-	dB	
Output Pulse Mask		Compliant with FDDI SMF-PMD1				
Output Eye		Compliant with ITU-T recommendation G.957				
Optical Rise Time	t_r	-	-	2	ns	10% to 90% Values
Optical Fall Time	t_f	-	-	2	ns	10% to 90% Values
Relative Intensity Noise	RIN	-	-	-116	dB/Hz	
Total Jitter	TJ	-	-	1.2	ns	Measured with 2 ²³ -1 PRBS with 72 ones and 72 zeros.

C-13-155(C)-T(3)-SSC7(9)

Transmitter Specifications, (-40<T_{opr}<85°C, 4.75V<V_{CC}<5.25V)

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Electrical						
Power Supply Current	I _{CC}	-	-	200	mA	Maximum current is specified at V _{CC} = Maximum @ maximum temperature
Data Input Current-Low	I _{IL}	-350	-	-	μA	
Data Input Current-High	I _{IH}	-	-	350	μA	
Differential Input Voltage	V _{IH} -V _{IL}	300	-	-	mV	
Data Input Voltage-Low	V _{IL} -V _{CC}	-2.0	-	-1.58	V	These inputs are compatible with 10K, 10KH and 100K ECL and PECL inputs
Data Input Voltage-High	V _{IH} -V _{CC}	-1.1	-	-0.74	V	


Receiver Specifications, (-40<T_{opr}<85°C, 4.75V<V_{CC}<5.25V)

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Optical						
Sensitivity	-	-	-	-37	dBm	measured with 2 ²³ -1 PRBS with 72 ones and 72 zeros.
Maximum Input Power	P _{in}	0	-	-	dBm	
Signal Detect-Asserted	Pa	-	-	-37	dBm	Measured on transition: low to high
Signal Detect-Deasserted	Pd	-48	-	-	dBm	Measured on transition: high to low
Signal Detect-Hysteresis		1.0	-	4.0	dB	
Wavelength of Operation		1100	-	1600	nm	

Receiver Specifications, (-40<T_{opr}<85°C, 4.75V<V_{CC}<5.25V)

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Electrical						
Power Supply Current	I _{CC}	-	-	100	mA	The current excludes the output load current
Data Input Voltage-Low	V _{OL} -V _{CC}	-2	-	-1.58	V	These outputs are compatible with 10K, 10KH and 100K ECL and PECL outputs.
Data Input Voltage-High	V _{OH} -V _{CC}	-1.1	-	-0.74	V	
Signal Detect Output Voltage-Low	V _{SDL} -V _{CC}	-2	-	-1.58	V	
Signal Detect Output Voltage-High	V _{SDH} -V _{CC}	-1.1	-	-0.74	V	


Connection Diagram

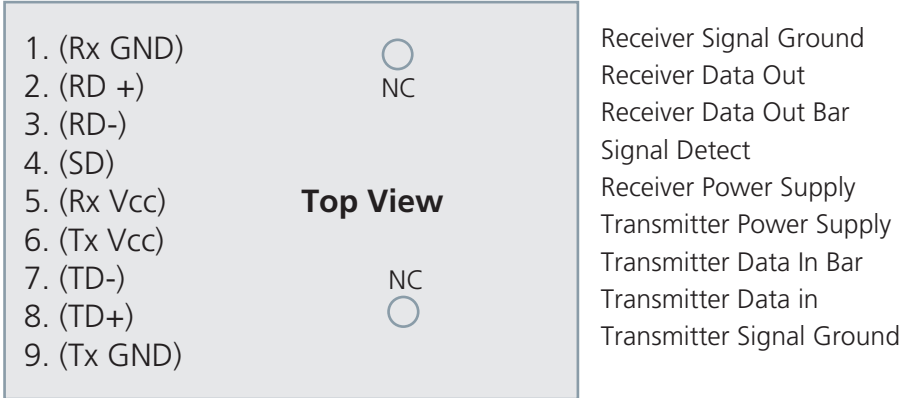


PIN	Symbol	Notes
1	RxGND	Directly connect this pin to the receiver ground plane
2	RD+	See recommended circuit schematic
3	RD-	See recommended circuit schematic
4	SD	Active high on this indicates a received optical signal
5	RxVcc	dc power for the receiver section
6	TxVcc	dc power for the transmitter section
7	TD-	See recommended circuit schematic
8	TD+	See recommended circuit schematic
9	TxGND	Directly connect this pin to the transmitter ground plane

Recommended Circuit Schematic

5V Series

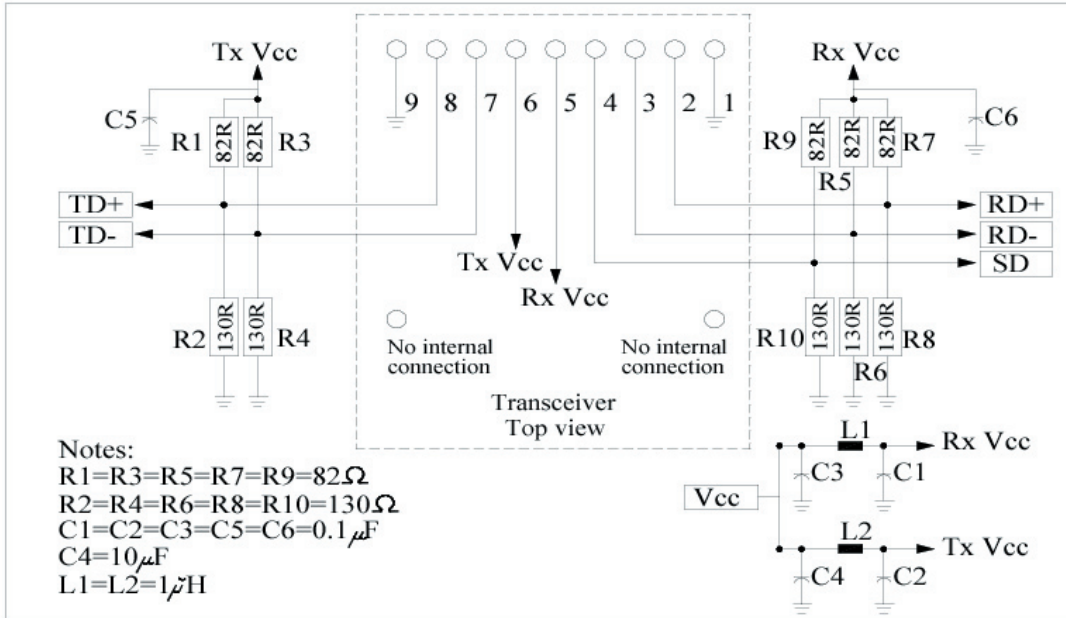

3.3V Series

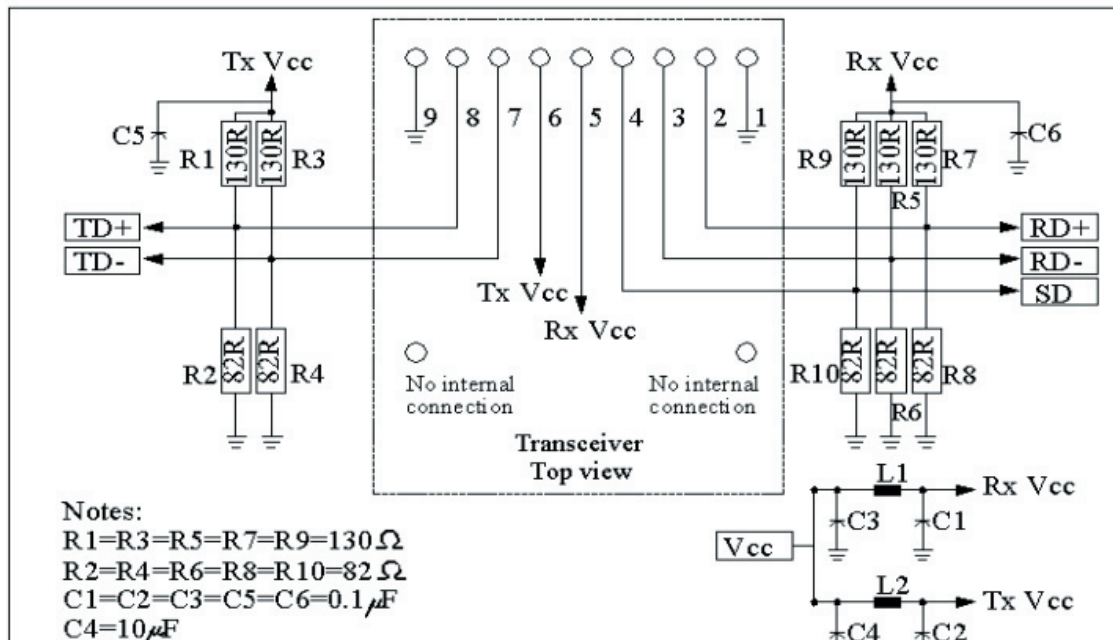


The split-loaded terminations for ECL signals need to be located at the input of devices receiving those ECL signals. The power supply filtering is required for good EMI performance. Use short tracks from the inductor L1/L2 to the module Rx Vcc. A GND plane under the module is required for good EMI and sensitivity performance.

C-13-155(C)-T(3)-SSC7(9)




Package Diagram

SC Transceiver Assembly 10.4 mm

Top View

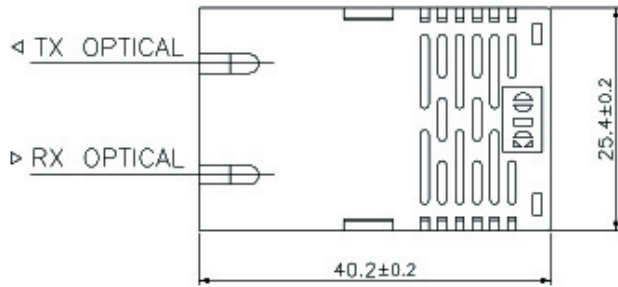

Front View

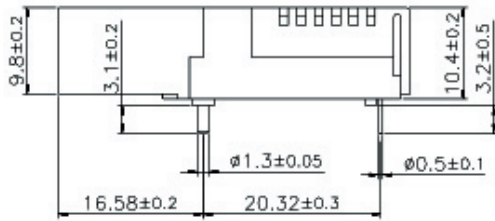


Side View

Rear View




Blank :Black Case
A : Blue Case

SC Transceiver Assembly 9.8mm

Top View

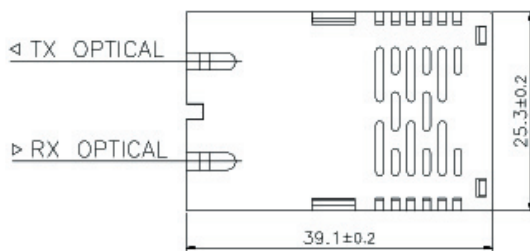

Front View

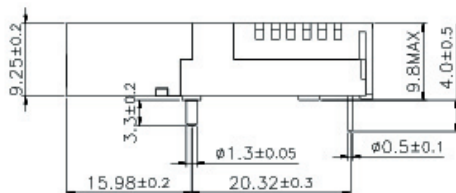

Side View

Rear View

B/E :Blue Case
C/D : Black Case

Ordering Information

C - 13 - 155 - T(3) - SSC 7(9) (A/B/C/D/E)

- Wavelength = 1310 nm
- Communication protocol (155 Mbps)
- +5V/(3.3V) Transceiver
- Single mode fiber
- Connector options
- Ultra Long Reach
- Blank: Black Case (10.4 mm)
A: Black Case (10.4 mm)
B/E: Blue Case (9.8mm)
C/D: Black Case (9.8mm)

Warnings

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Legal Notice

IMPORTANT NOTICE!

All information contained in this document is subject to change without notice, at Luminent’s sole and absolute discretion. Luminent warrants performance of its products to current specifications only in accordance with the company’s standard one-year warranty; however, specifications designated as “preliminary” are given to describe components only, and Luminent expressly disclaims any and all warranties for said products, including express, implied, and statutory warranties, warranties of merchantability, fitness for a particular purpose, and non-infringement of proprietary rights. Please refer to the company’s Terms and Conditions of Sale for further warranty information.

Luminent assumes no liability for applications assistance, customer product design, software performance, or infringement of patents, services, or intellectual property described herein. No license, either express or implied, is granted under any patent right, copyright, or intellectual property right, and Luminent makes no representations or warranties that the product(s) described herein are free from patent, copyright, or intellectual property rights. Products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. Luminent customers using or selling products for use in such applications do so at their own risk and agree to fully defend and indemnify Luminent for any damages resulting from such use or sale.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN “AS IS” BASIS. Customer agrees that Luminent is not liable for any actual, consequential, exemplary, or other damages arising directly or indirectly from any use of the information contained in this document. Customer must contact Luminent to obtain the latest version of this publication to verify, before placing any order, that the information contained herein is current.

© Luminent, Inc. 2003
All rights reserved