

Features

- 94% Efficient Step-Up DC to DC Converter
- Wide Input Range 0.9V to 5.5V
- 1.8V to 5.5V Adjustable Output Voltage
- 1.8MHz Operating Frequency
- Current Mode Operation for faster transient response and better loop stability
- 1µA Shutdown Mode
- Suitable with Low ESR Ceramic Capacitors (MLCC)
- Over Current Protection
- Over Temperature Protection
- MSOP-10L: Available in "Green" Molding Compound (No Br, Sb)
- Lead Free Finish/ RoHS Compliant (Note 1)


General Description

The AP6714 is fully integrated synchronous current mode boost converter which provides a complete power supply solution for all one-cell, two-cell, three cell, alkaline, NiCd or NiMh or single-cell Lithion battery powered products. They improve performance, component count and size compared to conventional controllers, lithium-ion (Li+) designs. On-chip MOSFETs provide up to 94% efficiency for critical power supplies. This optimizes overall efficiency and cost, while also reducing board space. Operate at one fixed frequency of 1.8MHz to optimize size, cost, and efficiency. Other features include soft-start and overload protection. AP6714 is available in space-saving 10-pin MSOP package.

Applications

- All One-cell, Two-cell, Three cell, Alkaline, NiCd or NiMh or Single-cell Li+ Battery Powered Devices.
- Cell Phones
- Digital Cameras
- MP3 Players
- PDAs


Ordering Information

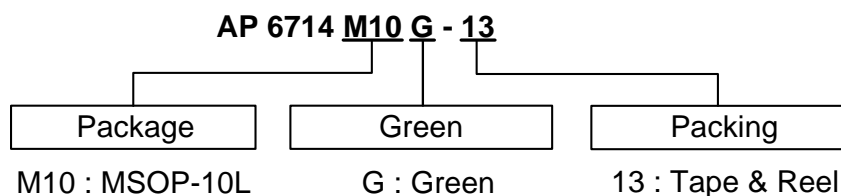

Device	Package Code	Packaging (Note 2)	13" Tape and Reel	
			Quantity	Part Number Suffix
AP6714M10G-13	M10	MSOP-10L	2500/Tape & Reel	-13

Notes: 1. EU Directive 2002/95/EC (RoHS). All applicable RoHS exemptions applied, see *EU Directive 2002/95/EC Annex Notes*.
 2. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.


Pin Assignments

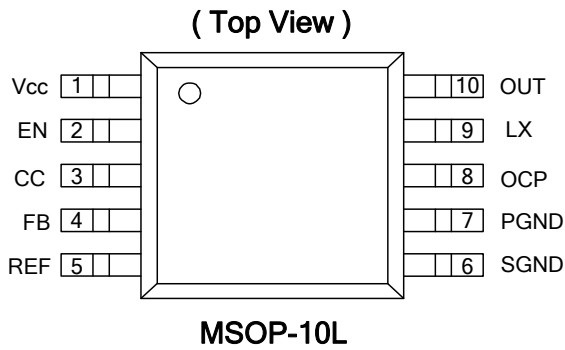

Pin Descriptions

Pin Name	Pin #	Description
V _{CC}	1	Power Input pin
EN	2	Enable Channel
CC	3	Channel Compensation Pin
FB	4	Channel Feedback Pin
REF	5	Internal Reference Voltage
SGND	6	Signal Ground
PGND	7	Power Ground
OCP	8	Over Current Protection
LX	9	SW Pin
OUT	10	Boost Output Pin

Block Diagram

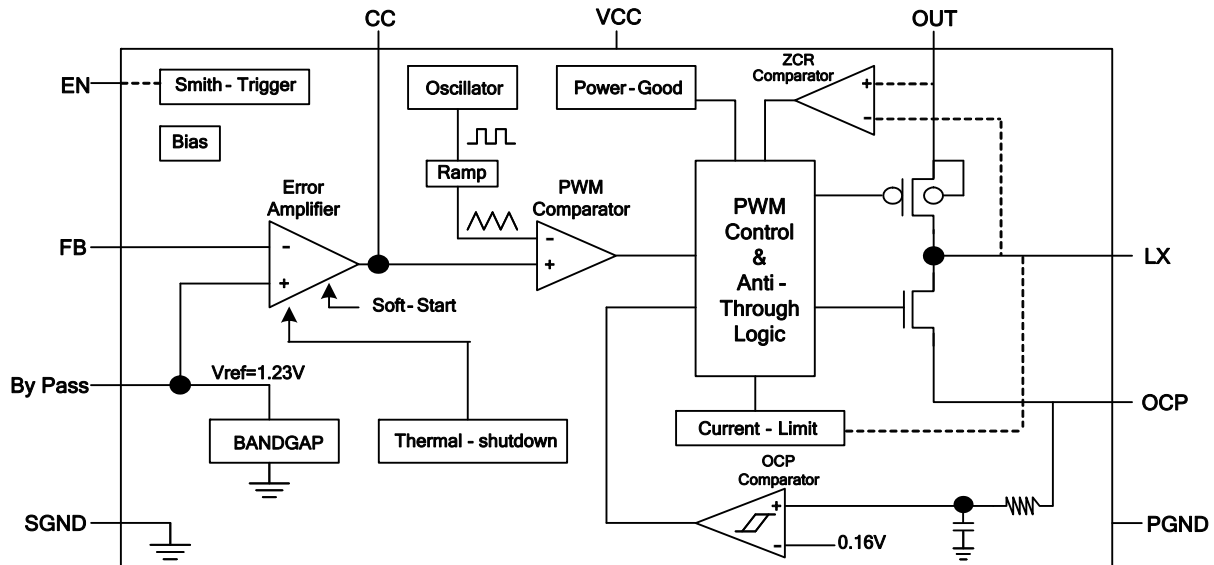

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
ESD HBM	Human Body Model ESD Protection	3	KV
ESD MM	Machine Model ESD Protection	250	V
	OUT, V _{CC} , EN, FB, OCP to GND	-0.3 to +6.5	V
	LX to GND	-0.3 to (OUT + 0.3)	V
I _{LX}	LX Current	1.6	A
	REF, CC to GND	-0.3 to (V _{CC} + 0.3)	V
P _D	Continuous Power Dissipation (T _A = +25°C)	850	mW
T _J	Operating Junction Temperature Range	-40 to +125	°C
T _{ST}	Storage Temperature Range	-65 to +150	°C

Recommend Operating Conditions

Symbol	Parameter	Rating	Unit
T _A	Operating Ambient Temperature Range	-40 to +85	°C
V _{IN}	Supply Voltage at V _{IN} (Note 3)	0.9 to 5.5	V
V _{OUT}	Output Voltage	1.8 to 5.5	V


Notes: 3. The AP6714 is powered by step-up output. An internal low-voltage startup oscillator drives the starting at approximately 0.9V and the main control will take over as soon as output is reached. AP6714 operation could be kept in low input voltage and output current is just limited.

Electrical Characteristics (V_{CC} = 3.6V, T_A = 25°C, unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
GENERAL						
I _{STB}	Standby Current	V _{CC} = 3.6V, V _{EN} = 0V	-	0.5	1	μA
I _{CC}	Supply Current	V _{CC} = EN = 3.6V, FB = 1.5V	-	150	300	μA
REFERENCE						
V _{REF}	Reference Output Voltage		1.205	1.23	1.255	V
ΔV _{REF} /ΔT	Tempco of Reference	-40 °C ≤ T ≤ 125 °C		30	50	ppm/°C
V _{REF(Load)}	Reference Load Regulation	10mA < I _{LOAD} < 200mA	-	4.5	10	mV
V _{REF(LINE)}	Reference Line Regulation	2.8 < V _{CC} < 5.5V	-	1.3	5	mV
OSCILLATOR						
F _{OSC}	OSC Frequency		1400	1800	2200	KHz
STEP-UP DC-TO-DC						
ΔV _{OUT} /ΔT	Tempco of Output Voltage	I _{OUT} = 10mA, -40 °C ≤ T ≤ 85 °C		50	100	ppm/°C
	FB Input Leakage Current	FB = 1.25V	-100	0.01	+100	nA
Duty	Step-Up Maximum Duty Cycle	FB = 0V	80	85	90	%
I _{OUT}	OUT Leakage Current	V _{LX} = 0V, OUT = 5V	-	1	5	μA
I _{LXL}	LX Leakage Current	V _{LX} = OUT = 5V	-	2	5	μA
R _{DS(ON)}	Switch On-Resistance	N channel, V _{CC} = 5V	-	200	-	mΩ
		P channel, V _{CC} = 5V	-	300	-	
I _{LM}	N-Channel Current Limit	V _{IN} = 1.5V (Note 4)	1.2	1.4	1.6	A
THERMAL SHUTDOWN PROTECTION						
	Thermal Shutdown		-	150	-	°C
	Thermal Hysteresis		-	40	-	°C
LOGIC INPUTS						
	EN Input Low Level	1.5V < V _{CC} < 5.5V	-	-	0.4	V
	EN Input High Level	1.5V < V _{CC} < 5.5V	0.8	-	-	V
OVER CURRENT PROTECTION						
V _{OCP}	Over Current Protection Voltage	R _{OCP} = 0.1Ω	-	0.16	-	V
THERMAL RESISTANCE						
θ _{JA}	Thermal Resistance Junction-to-Ambient	MSOP-10L (Note 5)		161		°C/W
θ _{JC}	Thermal Resistance Junction-to-Case	MSOP-10L (Note 5)		43		°C/W

Notes: 4. The step-up current limit in startup refers to the LX switch current limit, not the output current limit.
5. Test condition for MSOP-10L: Device mounted on 2oz copper, minimum recommended pad layout on top & bottom layer with thermal vias, double sided FR-4 PCB.

Typical Application Circuit (Note 6)

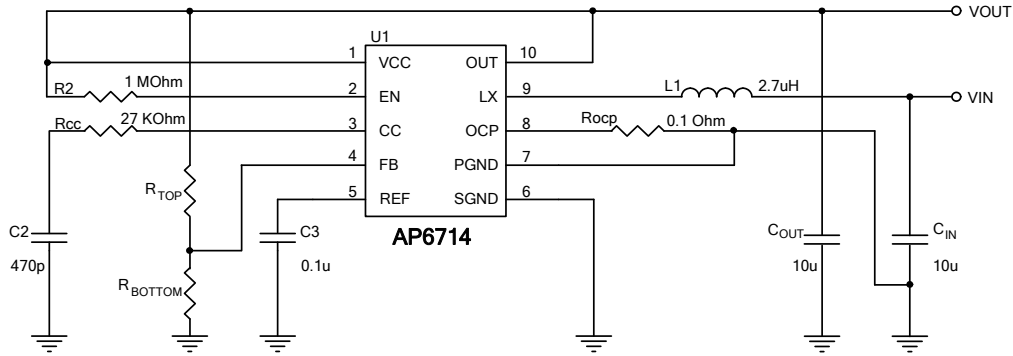

$$V_{OUT} = V_{FB} \times \left(1 + \frac{R_{TOP}}{R_{BOTTOM}}\right)$$

Notes: 6. Recommended minimum R_{BOTTOM}: 100 KΩ.

Typical Operating Characteristics

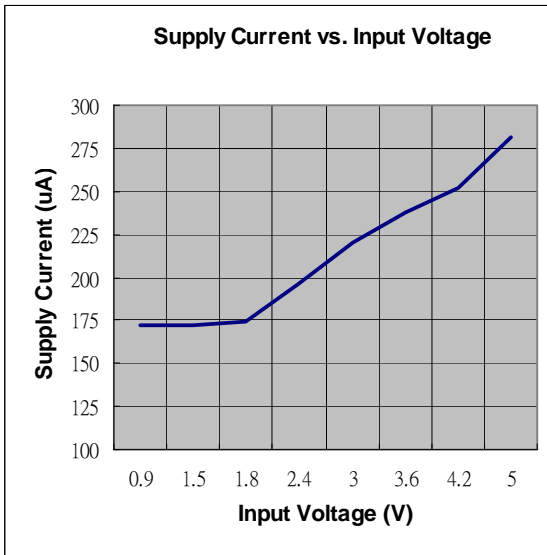


Figure. 1

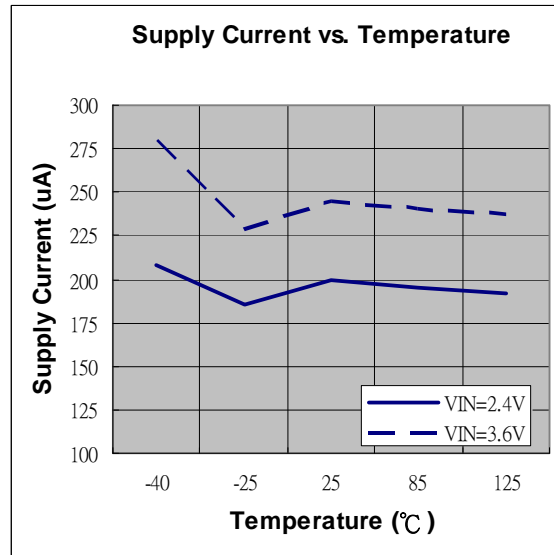


Figure. 2

Typical Operating Characteristics (Continued)

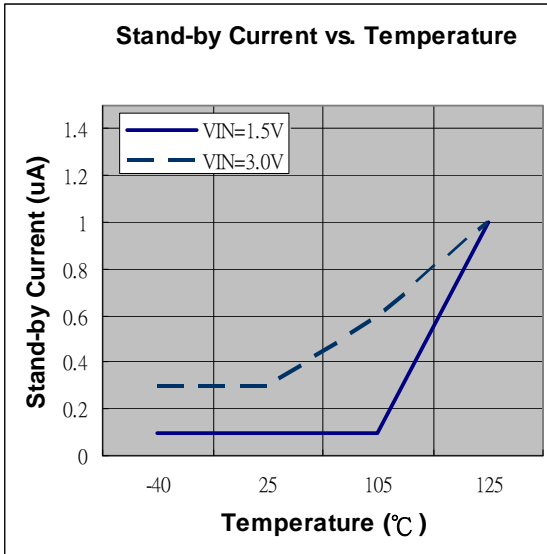


Figure. 3

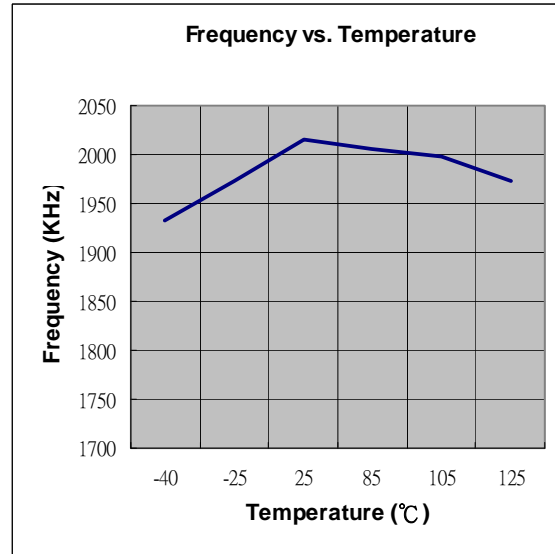


Figure. 4

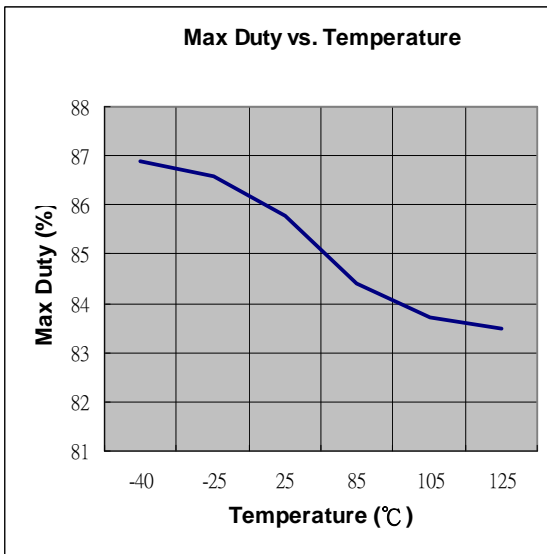


Figure. 5

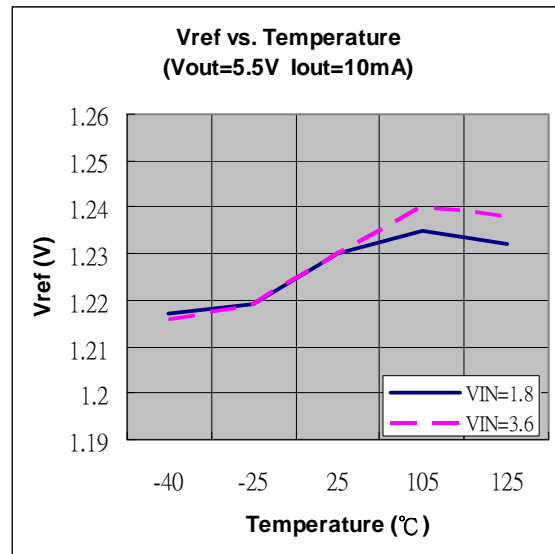


Figure. 6

Typical Operating Characteristics (Continued)

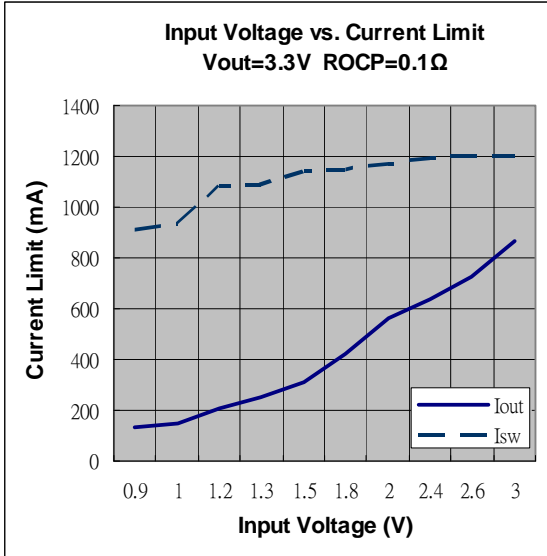


Figure. 7

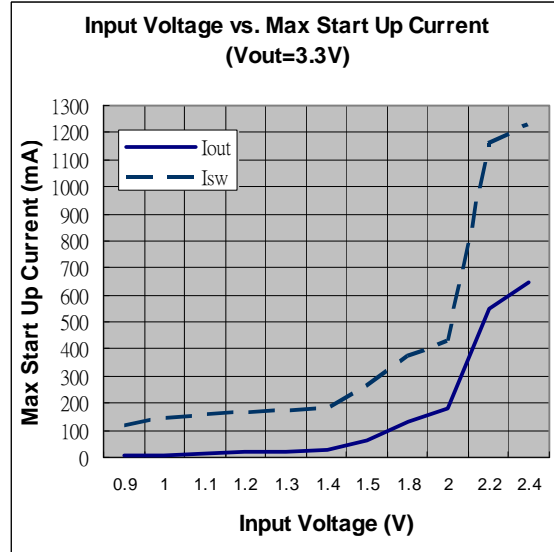


Figure. 8

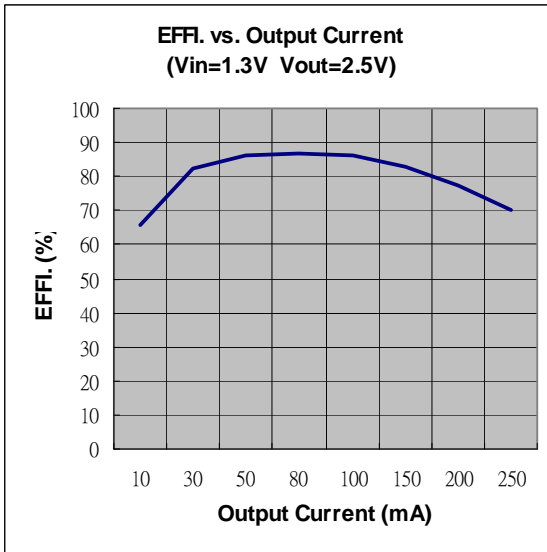


Figure. 9

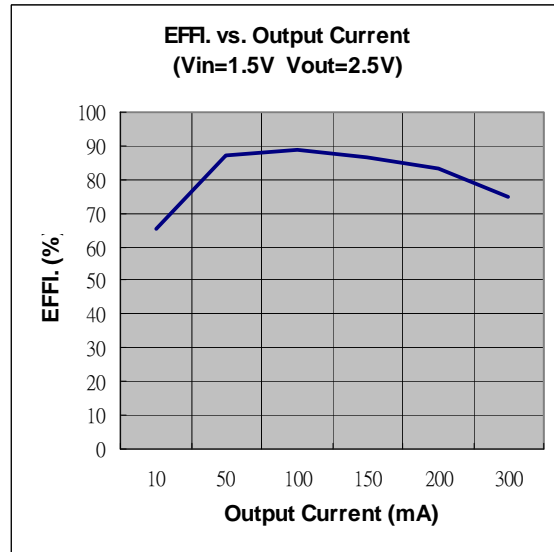


Figure. 10

Typical Operating Characteristics (Continued)

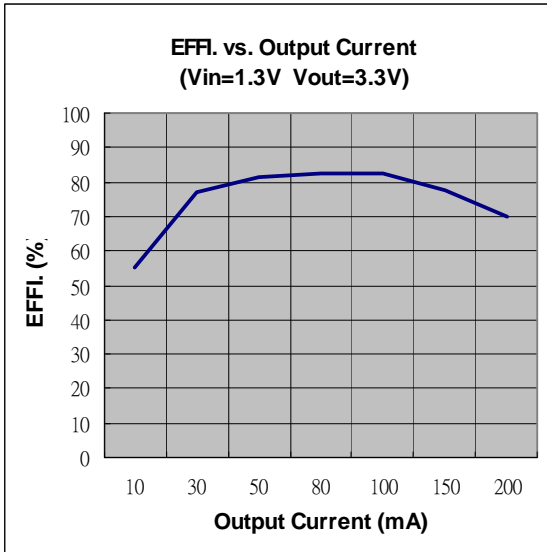


Figure. 11

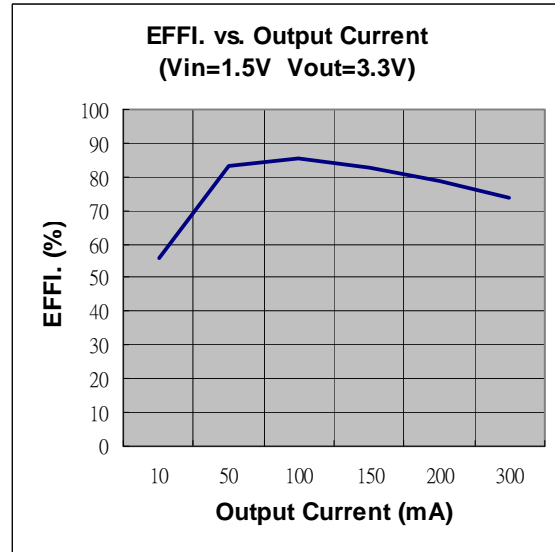


Figure. 12

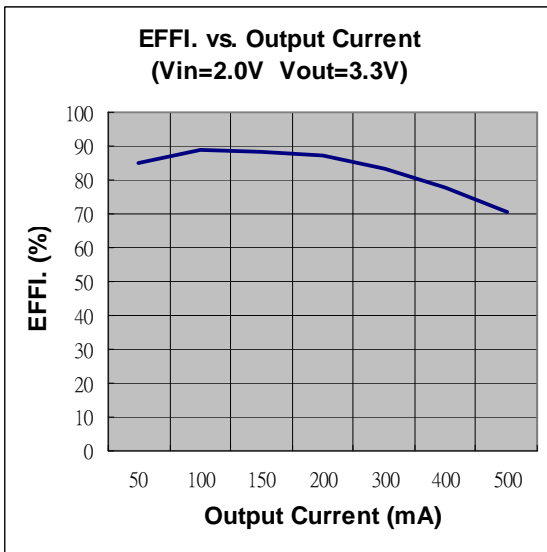


Figure. 13

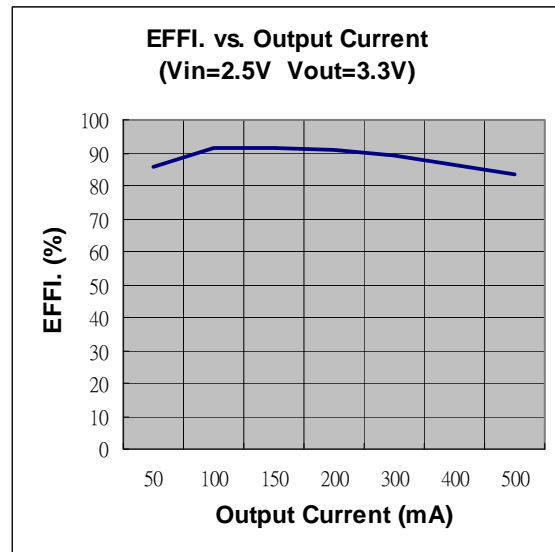


Figure. 14

Typical Operating Characteristics (Continued)

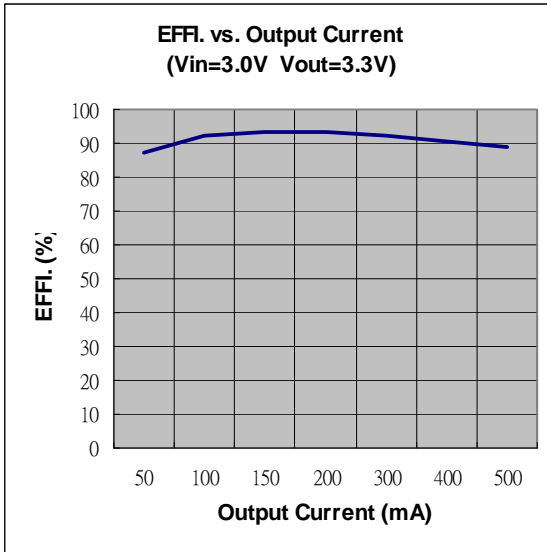


Figure. 15

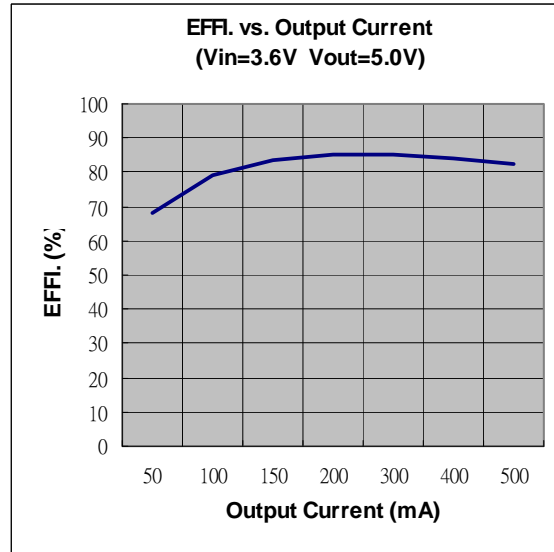


Figure. 16

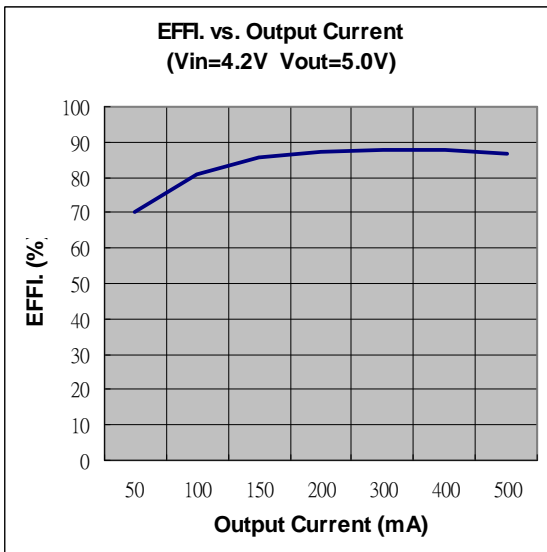


Figure. 17

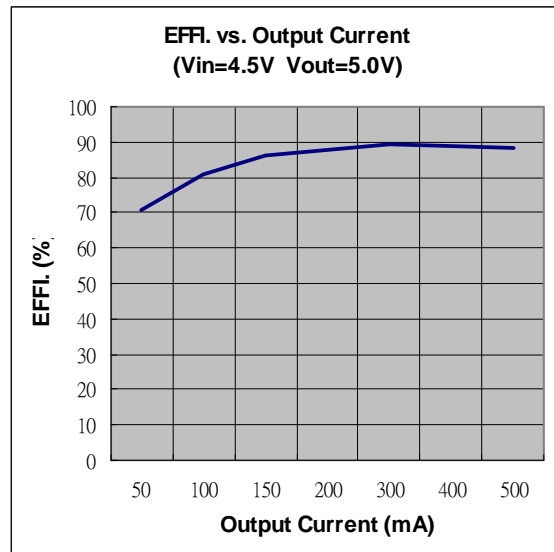


Figure. 18

Typical Operating Characteristics (Continued)

Switching Current vs. Output Ripple

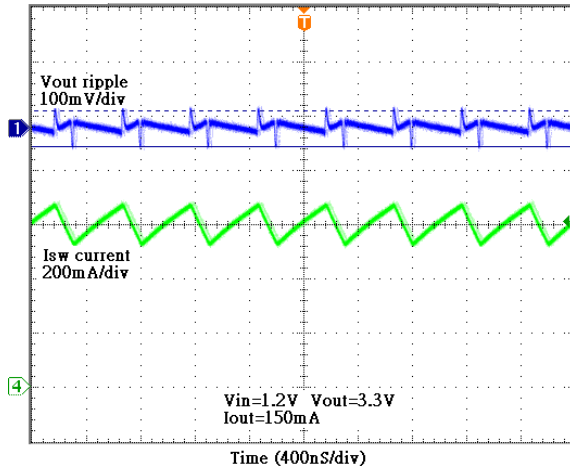


Figure. 19

Switching Current vs. Output Ripple

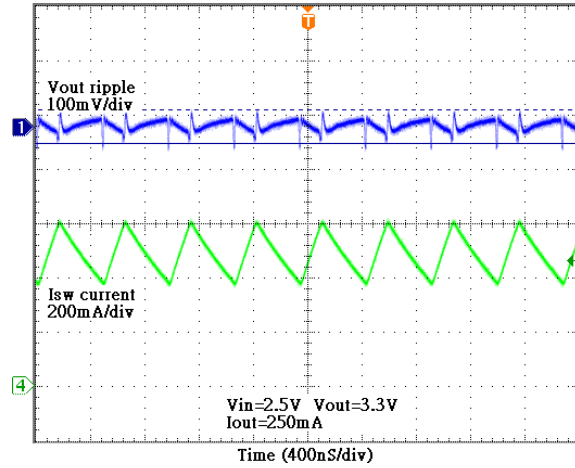


Figure. 20

Load Transient Response

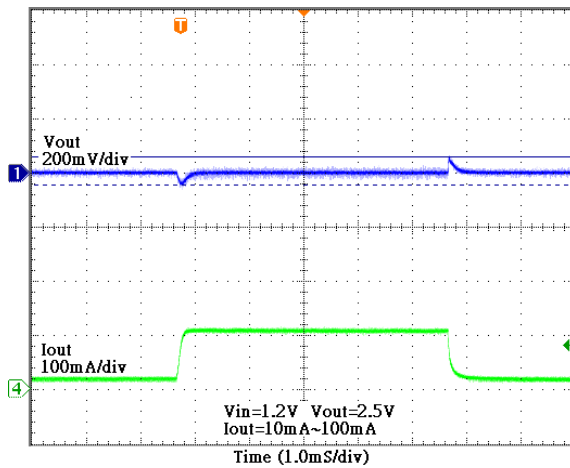


Figure. 21

Load Transient Response

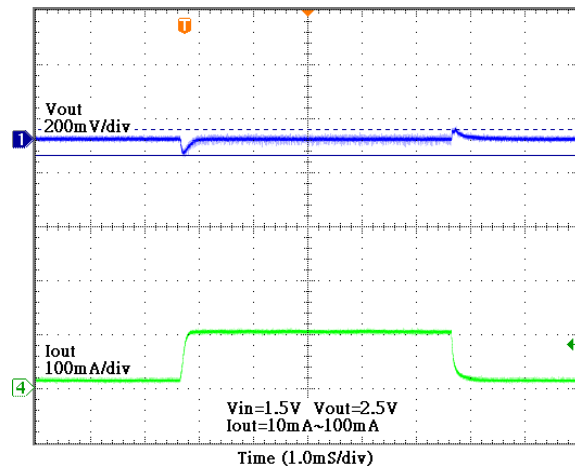


Figure. 22

Typical Operating Characteristics (Continued)

Load Transient Response

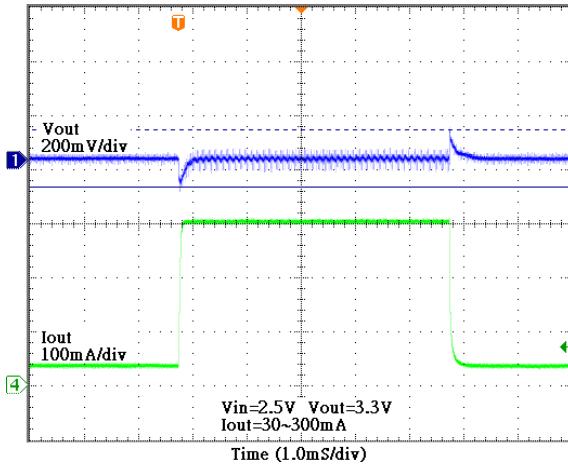


Figure. 23

Load Transient Response

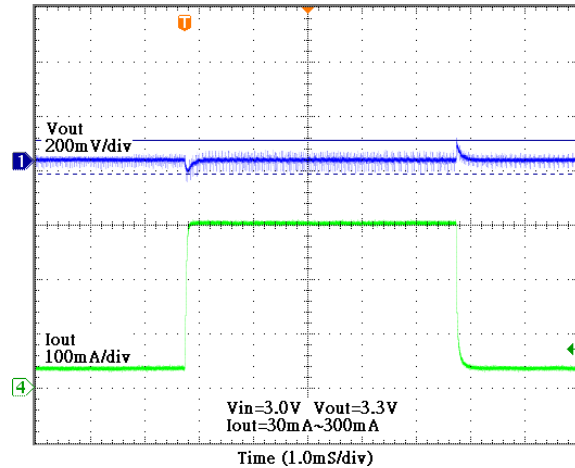


Figure. 24

Load Transient Response

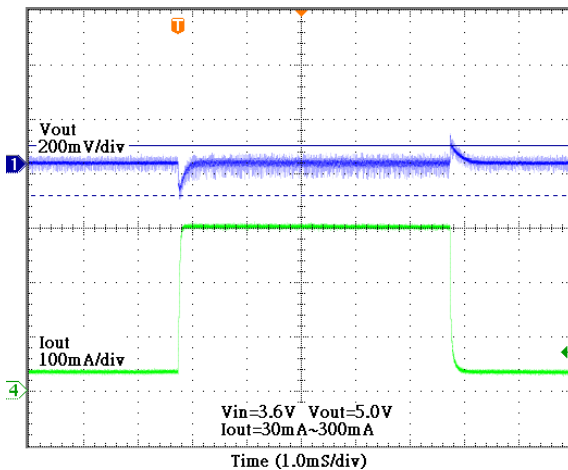


Figure. 25

Load Transient Response

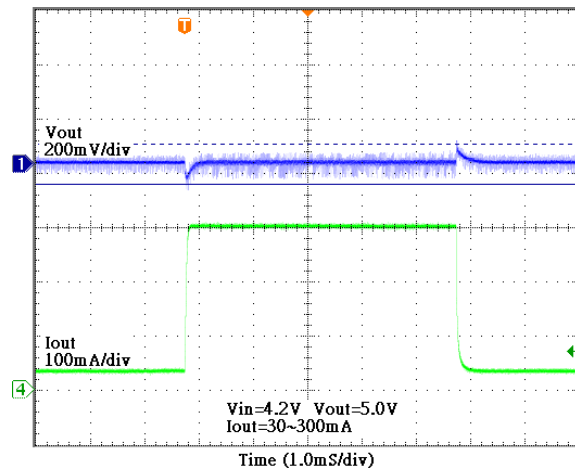


Figure. 26

Typical Operating Characteristics (Continued)

Power On Wave

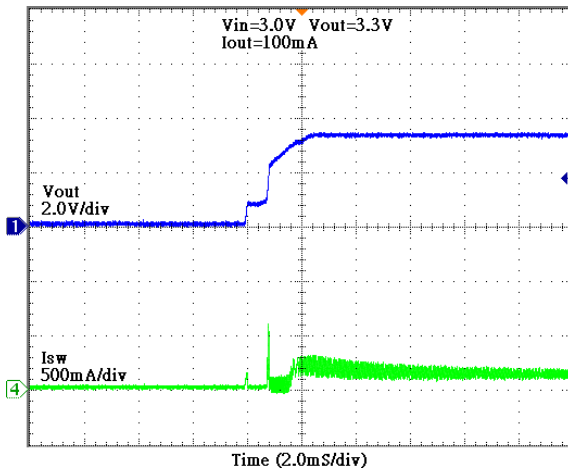


Figure. 27

Power On Wave

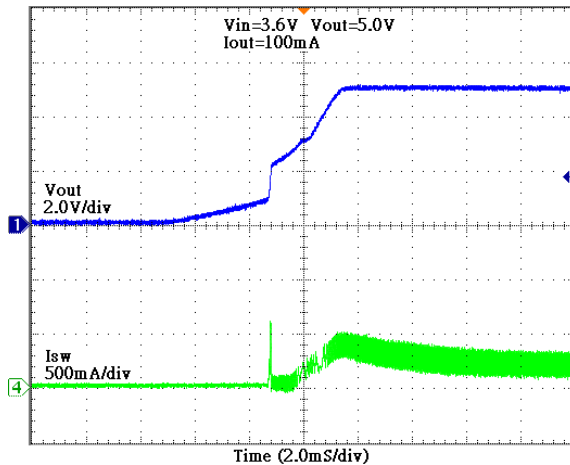


Figure. 28

Application Information

■ **Input Capacitor Selection**

The input filter capacitor reduces peak currents drawn from the input source and reduces input switching noise. In most applications a 10uF is recommended.

■ **Output Capacitor Selection**

The major parameter necessary to define the output capacitor is the maximum allowed output voltage ripple of the converter. This ripple is determined by two parameters of the capacitor, the capacitance and the ESR (Equivalent Series Resistance). It is possible to calculate the minimum capacitance needed for the defined ripple, supposing that ESR is zero, by using Equation below:

$$C_{MIN} = \frac{I_{OUT} \times (V_{OUT} - V_{IN})}{f \times \Delta V \times V_{OUT}}$$

where

f = the switching frequency

ΔV = the maximum allowed ripple

■ **Shutdown Mode**

The AP6714 converter will stop switching by setting EN pin Low, and is turned on by pulling it high. If this feature is not used, the EN pin should be tied to VCC pin to keep the regulator output on all the time. To ensure proper operation, the signal source used to drive the EN pin must be able to swing above and below the specified turn-on/off voltage thresholds listed in the Electrical Characteristics section under V_{IL} and V_{IH}.

Application Information (Continued)

■ Inductor Selection

The high frequency operation of the AP6714 allows the use of small surface mount inductors. The minimum inductance value is limited by the following constraints:

$$L > \frac{V_{IN(MIN)} \times (V_{OUT(MAX)} - V_{IN(MIN)})}{f \times I_{SW(Ripple)} \times V_{OUT(MAX)}} H$$

Where

f= Operating frequency (Hz)


I_{SW(Ripple)}= Allowable Inductor Current Ripple (A)

V_{IN(MIN)}= Minimum Input Voltage (V)

V_{OUT(MAX)}= Maximum Output Voltage (V)

■ Over Current Protection (OCP)

A resistor is required to connect PGND pin and OCP pin to prevent an overload occurs at the output. The output voltage will drop and duty cycle will be reduced if the OCP exceeds 0.16V. When R_{OCP} is 0.1Ω, the maximum switching current to operate normally is 1.6A (0.16V/0.1Ω). However, the actual switching current is related to duty ratio. By the way, larger R_{OCP} is recommended when V_{OUT} - V_{IN} ≤ 0.5V since the dropped output voltage is smaller than regular case while an overload condition exists.

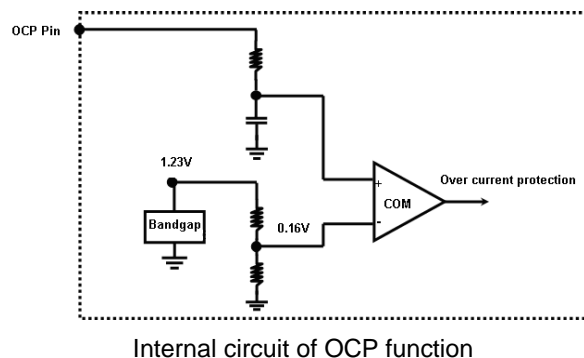

■ Thermal Information


The maximum recommended junction temperature (T_J) of AP6714 is 125°C. The thermal resistance of the 10-pin MSOP10 package is R_{θJA} = 161°C/W, if the Power PAD is soldered. Specified regulator operation is assured to an ambient temperature T_A of 45°C. Therefore, the maximum power dissipation is about 500mW. More power can be dissipated if the maximum ambient temperature of the application is lower.

$$P_{D(MAX)} = \frac{T_{J(MAX)} - T_A}{R_{\theta JA}}$$

■ Designing a PC Board


Good PC board layout is important to achieve optimal performance from AP6714. Poor design can cause excessive conducted and/or radiated noise. Conductors carrying discontinuous currents and any high-current path should be made as short and wide as possible. A separate low-noise ground plane containing the reference and signal grounds should connect to the power-ground plane at only one point to minimize the effects of power-ground currents. Typically, the ground planes are best joined right at the IC. Keep the voltage-feedback network very close to the IC, preferably within 0.2in (5mm) of the FB pin. Nodes with high dV/dt (switching nodes) should be kept as small as possible and should be routed away from high-impedance nodes such as FB.

Marking Information

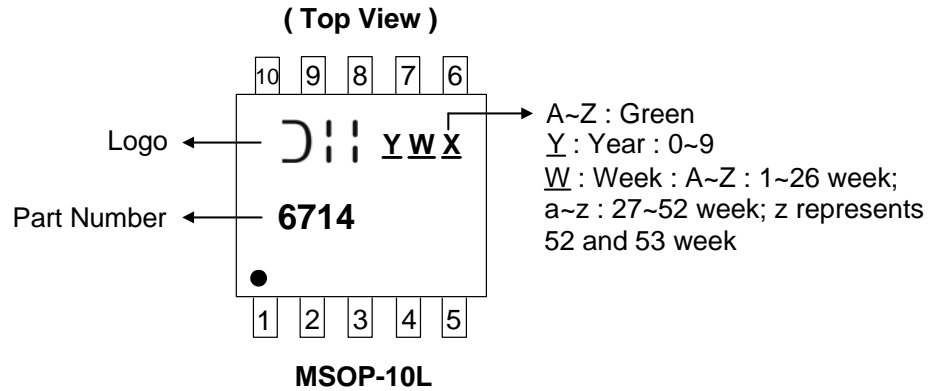

Package Information (All Dimensions in mm)

(1) Package type: MSOP-10L

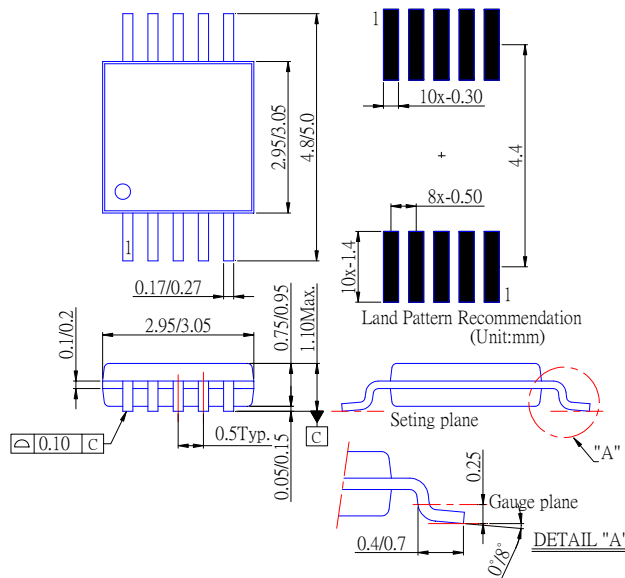

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.