
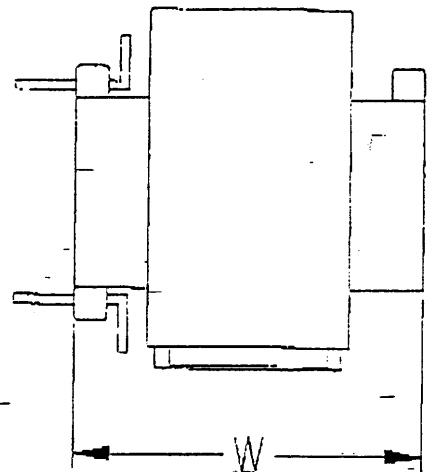
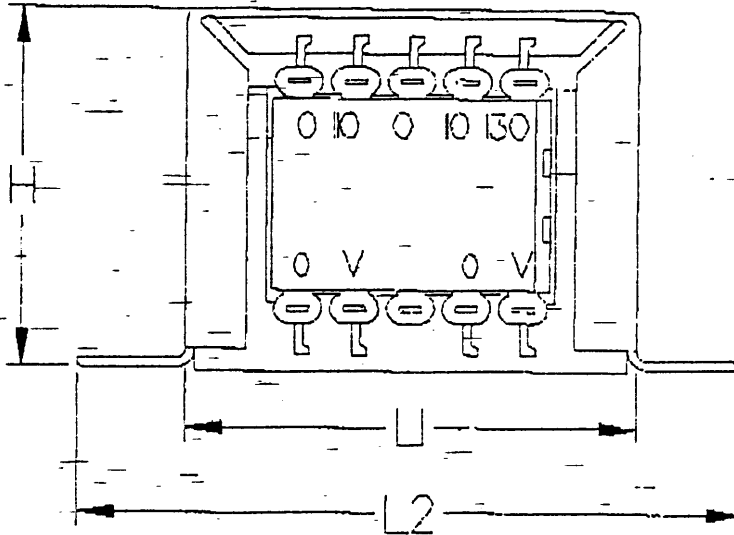


IF IN DOUBT - ASK

THIS IS A CAD DRAWING. ALL PRINTS ARE FOR REFERENCE ONLY. DO NOT AMEND HARD COPIES. ALL CHANGES TO BE MADE TO ORIGINAL CAD DRAWING ONLY.

6VA-75VA 240V CHASSIS RANGE

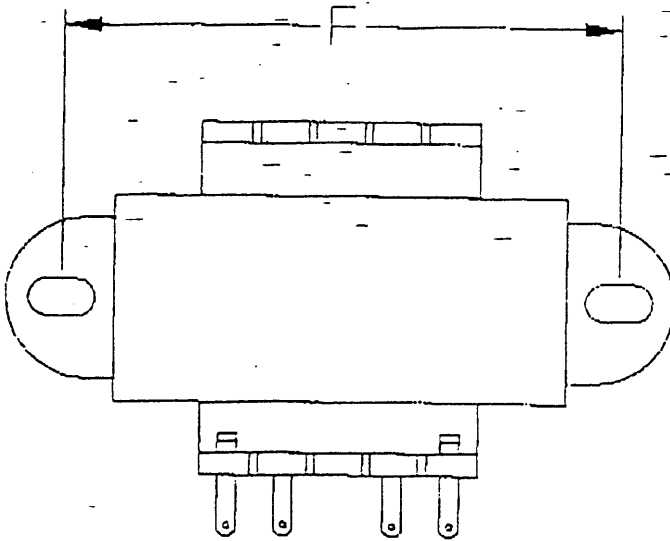

RATED VA	REG %	DIMENSIONS			FIXINGS		WT. KG
		L1/L2	W.#	H.	F	SIZE	
6	23	45/68	35.5	37.5	54	48A	0.19
12	12	60/88	47	50	74	23A	0.46
20	7	69/96	52	57	83	28A	0.70
50	10	79/106	60	66	93.9	28A	1.15
75	10	88/117	65	73	102	28A	1.6

EXCLUDES TAGS



Shuttleworth Rd
Beaford, Beds
MK41 0ep
Tel : 01234 330077
Fax : 01234 330088
email : engineering@dagnall.co.uk
dagnall.co.uk

Third Angle Projection

General Tolerance
 f = 0.4mm
 mA = 0.2mm
 MxK = 0.1mm

This drawing is the property of DAGNALL ELECTRONICS LIMITED and shall not be copied, reproduced, or used in any way without the written consent of DAGNALL ELECTRONICS LIMITED. The copyright in this drawing is reserved by DAGNALL ELECTRONICS LIMITED.

DRAWING NAME
OUTLINE DRAWINGS AND DATA

USED ON
6VA-75VA 240V CHASSIS RANGE

FINISH

SCALE
NTS

DRAWING No
010-0028

ISSUE	DATE	ENG	ECN
1	08.03.00	CJS	