

**SANYO****LC82210, 82210LK****Motion JPEG Codec****Preliminary****Overview**


The LC82210 is a JPEG encoder/decoder that handles motion JPEG. When encoding, the LC82210 accepts an A/D converter generated digital video input signal and encodes that signal in real time. When decoding, the LC82210 decodes a compressed decoded signal and produces a digital video signal that can be directly input to a D/A converter.

**Features**

- Encoding/decoding based on the JPEG standard
- The image size can be set arbitrarily.
- I/O image format Y : U : V = 4 : 2 : 2
- JPEG format Y : U : V = 4 : 2 : 2 or Y : U : V = 4 : 1 : 1
- Process 640 × 480 images 30 frames per second
- Memory control function for the image memory used for display, capture, and other image functions
- Supports the use of either 1M, 2M, 4M, 4M × 2 or 16M bit of DRAM for image memory.
- Supports fixed compression ratio encoding.
- Image memory can be accessed by external systems.
- Image memory compression function
- Supports a function for compressing/expanding part of an image.
- Supports both x86 and 68xx family CPUs. Also supports DMA transfers of compressed data.
- Low power mode
- Power-supply voltage: 3.3 V (internal) 5 V (pin) : LC82210  
3.3 V (single) LC82210LK


**Package Dimensions**

unit: mm

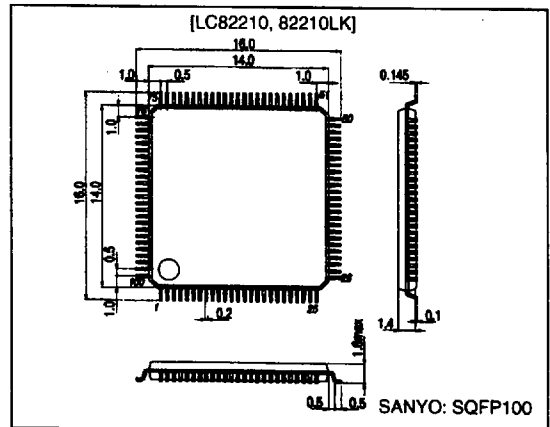**3181B-SQFP100****SANYO Electric Co., Ltd. Semiconductor Company**

TOKYO OFFICE Tokyo Bldg. 1-10-1 Chomei, Ueno, Taito-ku TOKYO, 110-8531 JAPAN

Block Diagram

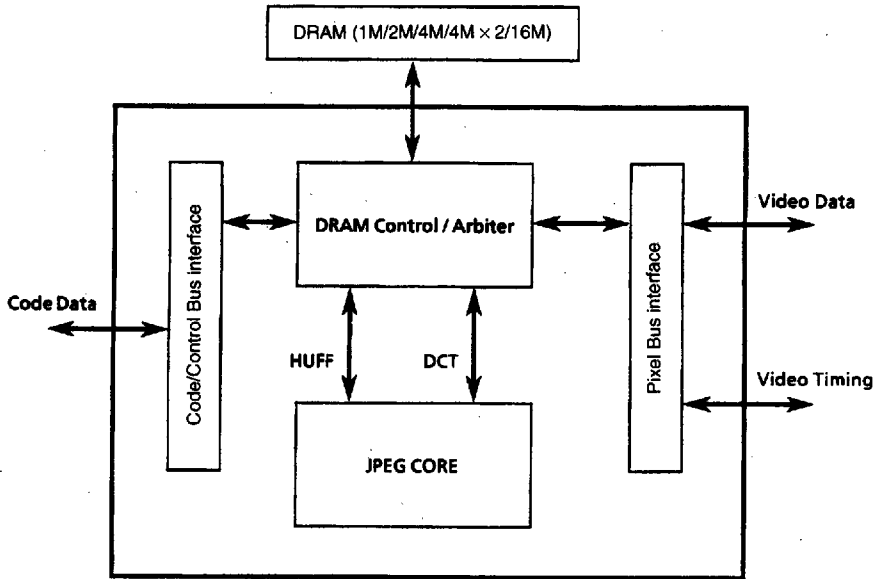

Application System Example

