**PC Board Mountable RFI Filters** for General Purpose Applications







**UL Recognized CSA Certified VDE Approved** 

#### **EDP Series**

The EDP series RFI filters provide enhanced differential mode performance for applications requiring more lineto-line protection. The EDP filters feature low leakage current for European safety requirements.


This series is likewise PC board mounted and is only slightly taller than the EOP series filters. The EDP filters are also available up to 10 amps.

#### **EOP Series**

The EOP series RFI power line filters are general purpose filters which are effective in removing both common and differential mode noise for susceptibility applications. These filters have low leakage current for European safety requirements.

The compact design allows PC mounting with minimal space requirements. Available from 1 to 10 amps, the filters provide a cost effective alternative to on board components.

# **Electrical Schematic EDP/EOP**



Resistor location for reference only.





### **Specifications**

Maximum leakage current, each

line-to-ground .22 mA @ 120 VAC 60 Hz: @ 250 VAC 50 Hz: .38 mA

Hipot rating (one minute):

1500 VAC line-to-ground line-to-line 1450 VDC

Operating frequency: 50/60 Hz

120/250 VAC Rated voltage:

Rated current:	@ 120 VAC	@ 250 VAC
1EDP/1EOP	1A	1A
3EDP/3EOP	3A	3A
6EDP/6EOP	6A	6A
10EDP/10EOP	10A	10A

#### **EOP** — **Minimum** insertion loss in dB:

Line-to-ground in 50 ohm circuit

Current	Frequency-MHz					
Rating	.15	.5	1	5	10	30
1	32	41	54	54	46	40
3	18	28	35	41	40	40
6	10	20	28	37	40	40
10	5	14	19	27	33	40

#### Line-to-line in 50 ohm circuit

Current	Frequency-MHz							
Rating	.15	.5	1	2	4	10	20	30
1	1	6	19	39	48	52	38	35
3	1	4	9	9	28	41	36	35
6	1	4	9	9	40	40	42	35
10	1	4	9	9	14	35	42	35

#### **EDP** — **Minimum** insertion loss in dB:

Line-to-ground in 50 ohm circuit

Current		Fred	quency-l	MHz		
Rating	.15	.5	1	5	10	30
1	32	41	54	54	46	40
3	18	28	35	41	40	40
6	10	20	28	37	40	40
10	5	14	19	27	33	40

#### Line-to-line in 50 ohm circuit


Current		Fre	quency-l	ИНZ		
Rating	.15	.5	1	5	10	30
1	4	14	42	42	44	38
3	4	14	24	38	38	38
6	4	14	22	30	34	34
10	6	16	22	40	50	45
				/.	= \	

Libertyville, IL (847) 680-7400



# Series EDP, EOP

# Case Style Metric shown in italics.

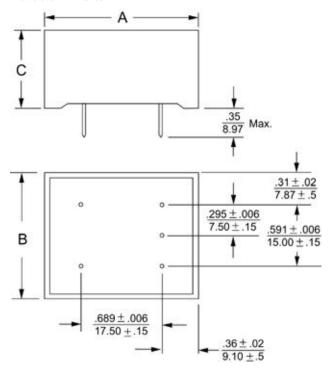

Pins .025 square


#### **Case Dimensions**

Metric shown in italics.

Part No.	A	B	C
	(max)	(max)	(max)
EDP	<u>1.44</u>	1.24	0.95
	36.6	31.5	24.15
EOP	36.6	<u>1.24</u> <u>31.5</u>	<u>0.78</u> 19.9

# **Ordering Information**

Consult your local Corcom sales representative for pricing.



Available Part Numbers				
1EDP	1EOP			
3EDP	3EOP			
6EDP	6EOP			
10EDP	10EOP			