www.DataSheet4U.com

SERIES REGULATOR WITH RESET FUNCTION

■ GENERAL DESCRIPTION

The NJM78LR05 is a series regulator with reset function.

In case of shut down or output voltage drop, the IC generates reset signal to a microcomputer.

That is suitable for items with microcomputer, such as TV sets, remote controller, refrigerator and others.

■ FEATURES

- ●Output Current Io=150mA max.
- ●Reset Function Including
- ●Reset Delay Time can be Adjusted by an External Capacitance.
- ●Internal Over Current Protection
- ●Thermal Shut Down
- ●Bipolar Technology
- ●Package Outline DIP8, DMP8, SIP8, SOT-89(5Pin)

■ RESET THRESHOLD VOLTAGE LINE-UP

Reset Threshold Voltage	Version	Part Number
4.0V	D	NJM78LR05DX
4.2V	C	NJM78LR05CX
4.3V	B	NJM78LR05DX

"X" is package suffix.

■ PACKAGE OUTLINE



NJM78LR05BD/CD/DD

NJM78LR05BM/CM/DM



NJM78LR05BL/CL/DL

NJM78LR05BU/CU/DU

■ BLOCK DIAGRAM

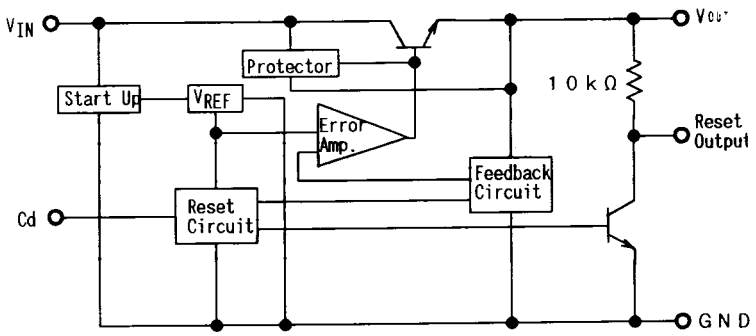

6

www.DataSheet4U.com

■ PIN CONFIGURATION



NJM78LR05BD/CD/DD
NJM78LR05BM/CM/DM



NJM78LR05BL/CL/DL

PIN FUNCTION
1. INPUT
2. NC
3. Cd
4. NC
5. GND
6. RESET−OUTPUT
7. NC
8. OUTPUT



NJM78LR05BU/CU/DU

PIN FUNCTION
1. Cd
2. GND
3. RESET−OUTPUT
4. OUTPUT
5. INPUT

■ ABSOLUTE MAXIMUM RATINGS (Ta=25℃)

PARAMETER	SYMBOL	MAXIMUM RATINGS	UNIT
Input Voltage	V_{IN}	+20	V
Power Dissipation	P_D	(DIP8) 500 (DMP8) 500※ (SIP8) 800 (SOT-89) 350	mW
Operating Temperature Range	T_{opr}	−40～+85	℃
Storage Temperature Range	T_{stg}	−50～+150	℃

※At on PC board.

■ RECOMMENDED OPERATING CONDITIONS (Ta=25℃)

PARAMETER	SYMBOL	CONDITIONS	UNIT
Input Voltage	V_{IN}	7.5～18	V
Output Current	Io	1～100	mA

6

■ ELECTRICAL CHARACTERISTICS (V_{IN}=10V, Io=40mA, C_{IN}=1μF, Co=10μF, Ta=25℃)

〔Power Supply Block〕

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	Vo	Io=1mA	4.80	5.00	5.20	V
Quiescent Current	I_Q	Io=100mA	—	1.40	3.40	mA
Output Short Current	I_{OSC}	OUTPUT-GND short	150	300	450	mA
Line Regulation 1	$\Delta Vo/V_{IN}1$	7V≦V_{IN}≦18V	—	6.0	65.0	mV
Line Regulation 2	$\Delta Vo/V_{IN}2$	8V≦V_{IN}≦18V	—	3.0	42.0	mV
Load Regulation 1	$\Delta Vo/Io1$	Io=1～100mA	—	9.0	60.0	mV
Load Regulation 2	$\Delta Vo/Io2$	Io=1～40mA	—	3.0	30.0	mV
Ripple Rejection	RR	f=120Hz, e_{in}=1V_{P-P}, V_{IN}=8～18V	—	79	—	dB
Output Noise Voltage	V_{NO}	10Hz≦f≦100kHz, Io=1mA	—	80	—	μV
Dropout Voltage	ΔV_{I-O}		—	1.5	2.2	V

〔Reset Block〕

(H) Reset Output Voltage	V_{ORH}		4.80	5.00	5.20	V
(L) Reset Output Voltage	V_{ORL}	V_{IN}=3V, Io=1mA	—	10	200	mV
Reset Threshold Voltage	V_{RT}	B Version	4.12	4.30	4.48	V
		C Version	4.03	4.20	4.37	
		D Version	3.84	4.00	4.16	
Reset Threshold Hysteresis Voltage	V_{RTH}		50	100	200	mV
Reset Output Delay Time	td	Cd=0.1μF	7.50	10.0	12.5	ms

6

■ APPLICATION CIRCUIT

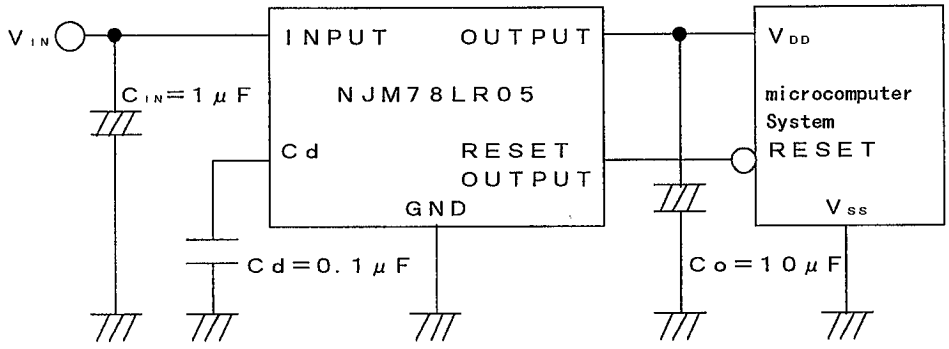

$$td\ [ms] = 100 \times Cd\ [\mu F]$$

Note1: When the capacitance Cd is too large, the actual delay time is shorter than the calculated result because an electrical charge of Cd is discharged incompletely.
Solution of above problem:
(1) Connect SBD between output terminal and Cd terminal. Please refer to the fallowing circuit.
(2) Select larger capacitance, C_{IN} than Cd.

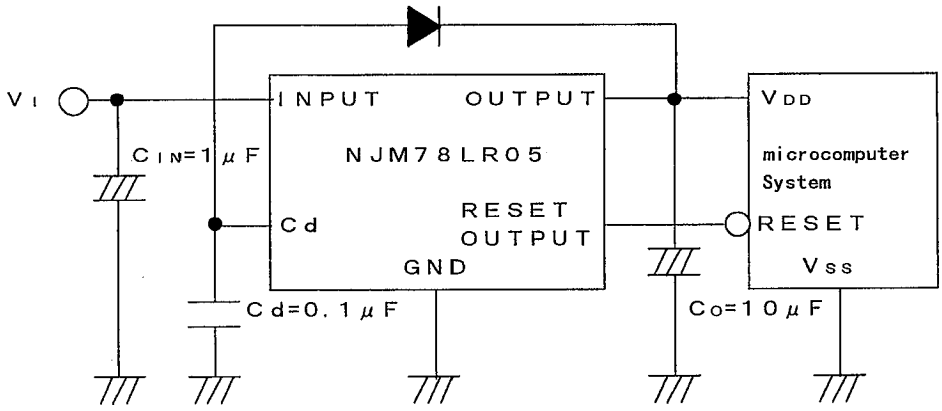

6

■ TIMING CHART

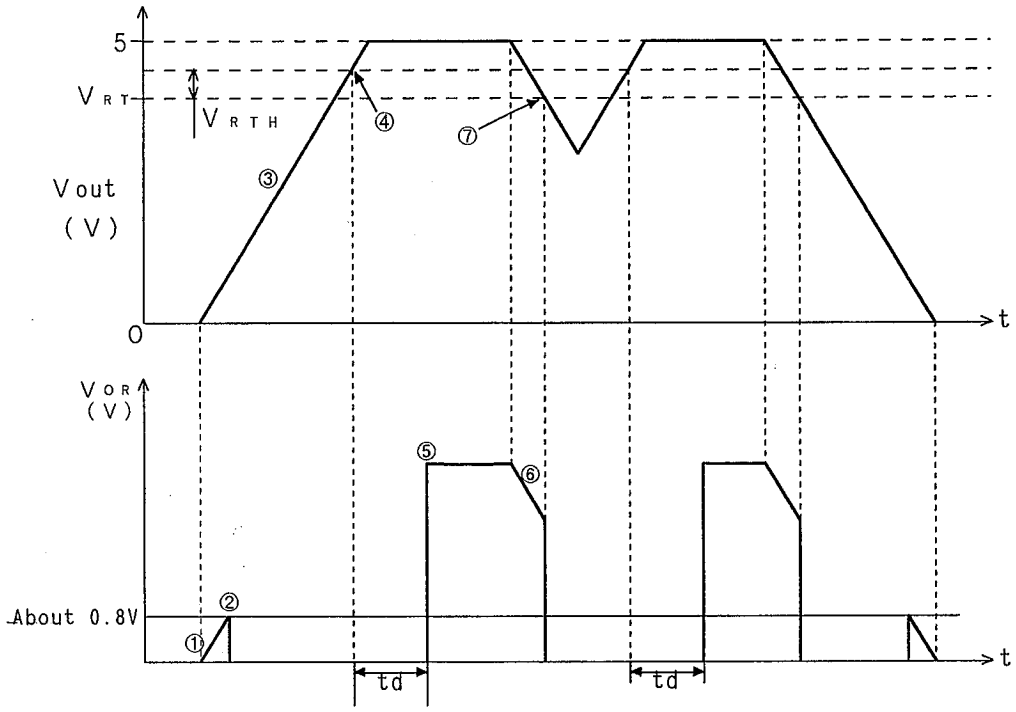

① When the input voltage is up to about 0.8V, some voltage is outputted at the reset output because the NJM78LR05 operation is unstable.
② When the input voltage goes over about 0.8V , the reset output becomes "L".
③ The output voltage is rising up with the input voltage.
④ When the output voltage goes over (V_{RT}+V_{RTH}), the delay circuit of reset output activates.
V_{RT} :Reset Threshold Voltage
V_{RTH}:Reset Threshold Hysterisis Voltage
⑤ After the reset output delay time td has passed, the reset output becomes "H".
⑥ The output voltage is falling down with the input voltage.
⑦ When the output voltage is less than V_{RT}, the reset output becomes "L".

6

■ TYPICAL CHARACTERISTICS

Reset Output Voltage vs.Output Voltage
(I_O=40mA,Ta=25°C)

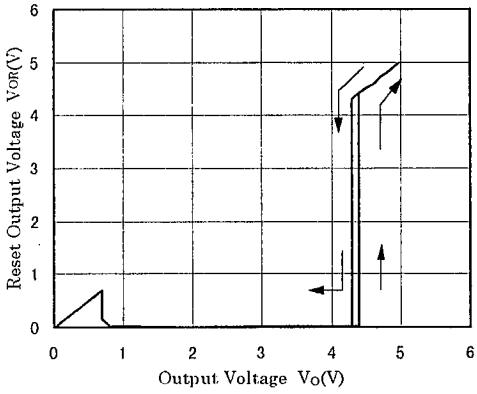

Line Regulation
(Ta=25°C)

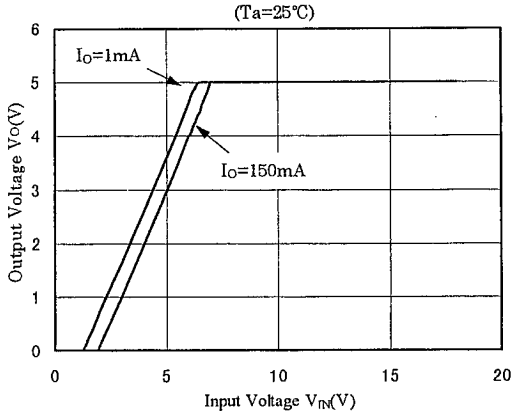

Load Regulation
(V_{IN}=10V,Ta=25°C)

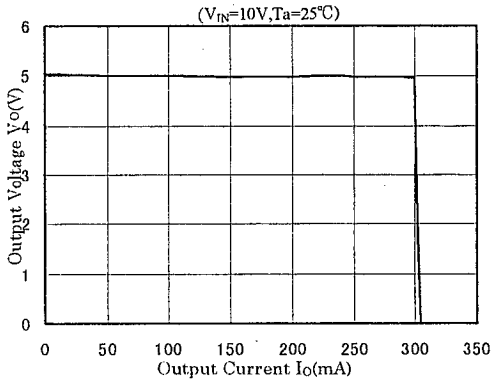

Dropout Voltage
(Ta=25°C)

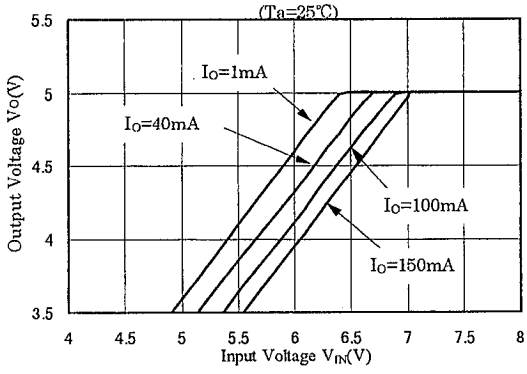

Quiescent Current vs. Input Voltage
(I_O=0mA,Ta=25°C)

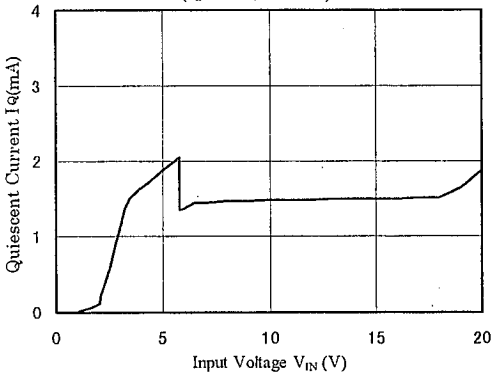

Output Short Current vs. Input Voltage

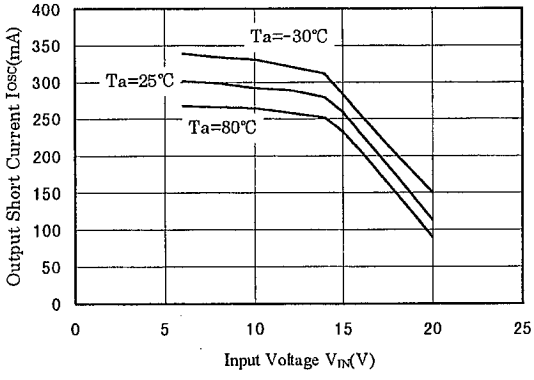

6

■ TYPICAL CHARACTERISTICS

Reset Output Delay Time vs. Reset Output Delay Capacitance
(V_{IN}=10V,I_O=40mA,Ta=25°C)

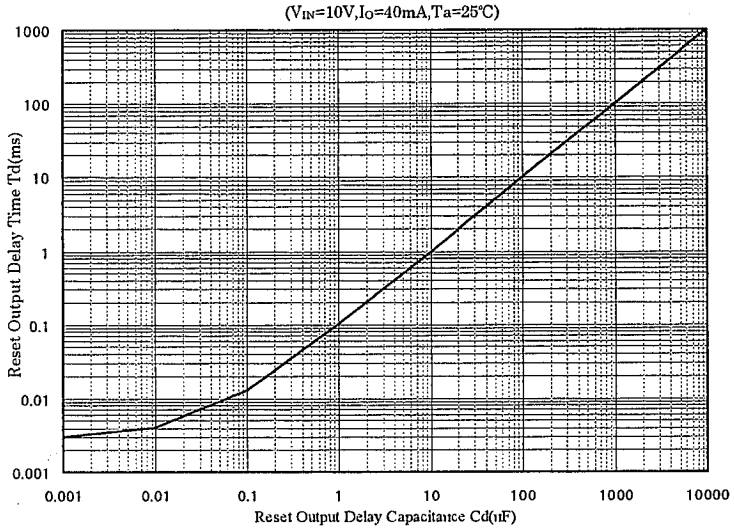

Ripple Rejection vs. Frequency
(V_{IN}=10V,I_O=40mA,ein=1V_{P-P},C_O=10μF,Ta=25°C)

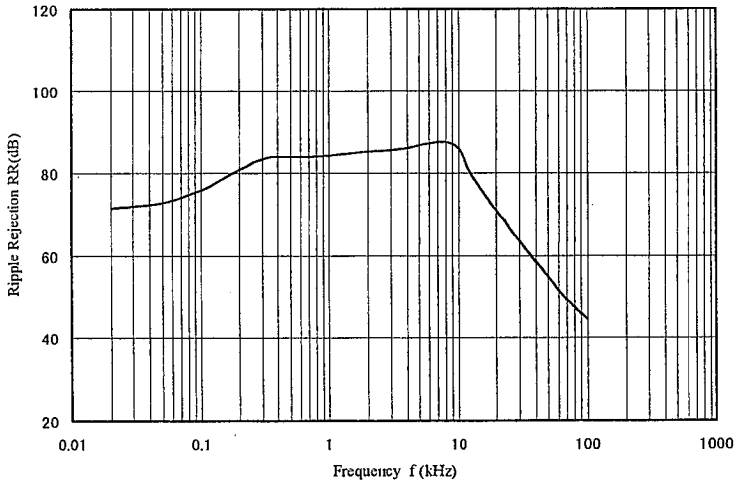

6

■ TYPICAL CHARACTERISTICS

Thermal Shutdown
(V_{IN}=10V,I_O=0mA)

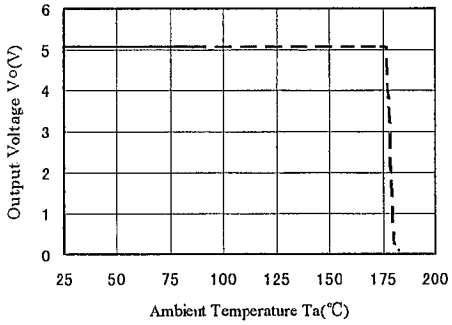

Output Voltage vs. Ambient Temperature
(V_{IN}=10V,I_O=10mA)

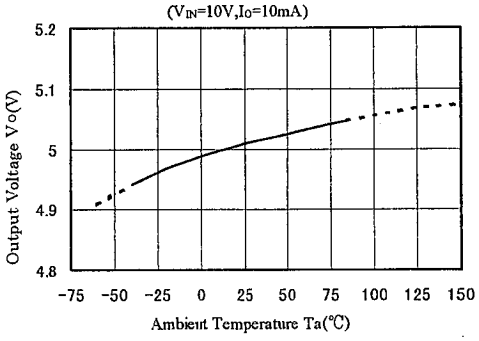

Reset Output Voltage vs. Reset Sink Current
(V_{IN}=10V,I_O=5mA,Ta=25°C)

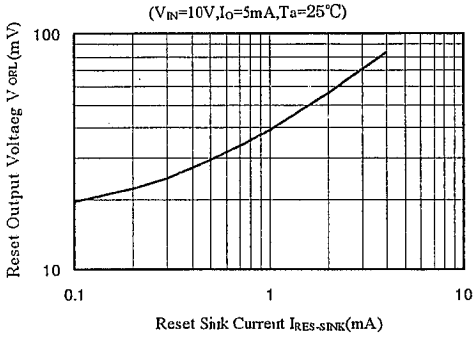

6

www.DataSheet4U.com

MEMO

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

www.DataSheet4U.com