




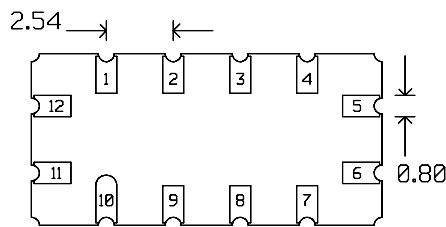



**PACKAGE OUTLINE**

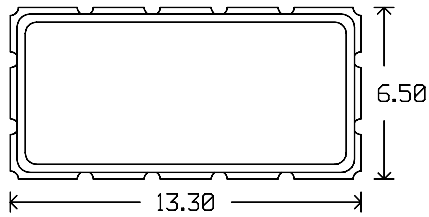


**Units:** mm

**Pad Configuration:**

Input: 11  
Input Return: 12  
Output: 5  
Output Return: 6  
Ground: 1,2,3,4,7,8,9,10

**MATCHING CIRCUIT**

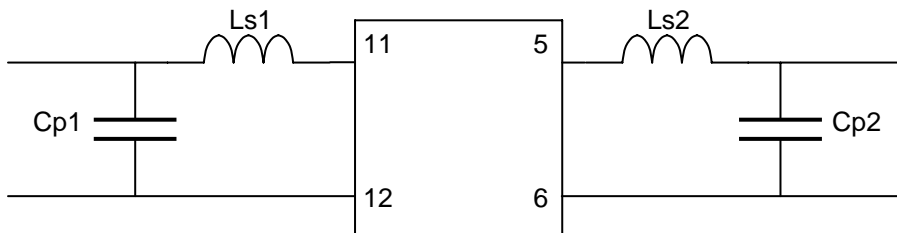

Typical component values:      Ls1 = 17 nH                      Ls2 = 15 nH  
   Cp1 = 18 pF                      Cp2 = 18 pF  
(Minimum inductor Q = 40)

**Notes**

- Maximum 2% tolerance matching components shall be used.
- Tuning values shown are for reference only. Optimum values may change depending upon board layout.

