

67-21/Y2C-AP1Q1B/2T

Features

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version

Descriptions

• The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the SMT TOP LED ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

Device No.:DSE-0001032

Device Selection Guide

Chip	Emitted Color	Resin Color		
Material	Elinted Color	Resiii Color		
AlGaInP	Brilliant Yellow	Water Clear		

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 1 of 10


Prepared date: 11-Mar.-2009 Prepared by: Rita Shen





67-21/Y2C-AP1Q1B/2T

Package Dimensions

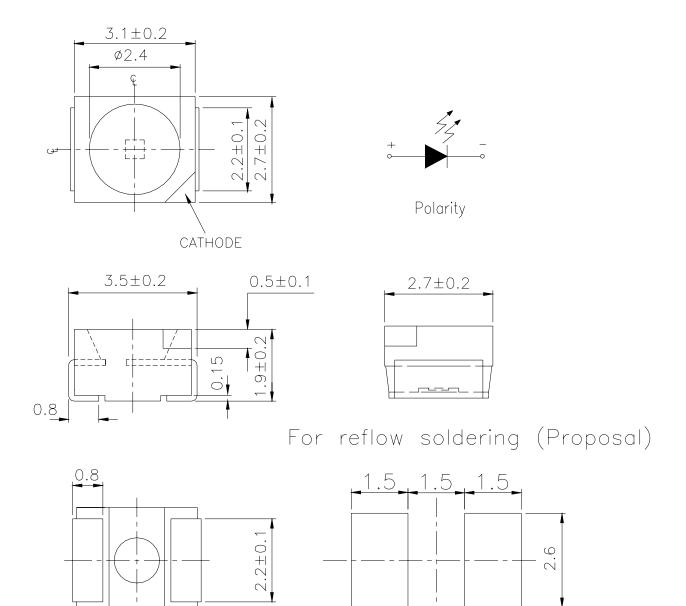

Note: The tolerances unless mentioned is ± 0.1 mm; Unit = mm

Everlight Electronics Co., Ltd. Device No.:DSE-0001032

http://www.everlight.com

Prepared date: 11-Mar.-2009

Rev. 2

Page: 2 of 10

Prepared by: Rita Shen



67-21/Y2C-AP1Q1B/2T

Absolute Maximum Ratings (Ta=25°C)

Parameter		Rating	Unit
Reverse Voltage		5	V
Forward Current		25	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA
Power Dissipation	Pd	60	mW
Electrostatic Discharge(HBM)		2000	V
Operating Temperature	Topr	- 40 ∼ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	Reflow Soldering : 260 °C Hand Soldering : 350 °C	

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	45		90	mcd	I _F =20mA	
Viewing Angle	2 0 1/2		120		deg		
Peak Wavelength	λр		591		nm		
Dominant Wavelength	λd	585.5		594.5	nm		
Spectrum Radiation Bandwidth	Δλ		15		nm		
Forward Voltage	V_{F}	1.75		2.35	V		

Notes:

1.Tolerance of Luminous Intensity: ±11%

2. Tolerance of Dominant Wavelength: ±1nm

3. Tolerance of Forward Voltage: ± 0.1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 3 of 10



67-21/Y2C-AP1Q1B/2T

Bin Range of Luminous Intensity

Bin	Min.	Max.	Unit	Condition		
P1	45	57				
P2	57	72	mcd	I _F =20mA		
Q1	72	90				

Bin Range of Dominant Wavelength

Group	Bin Code	Min.	Max.	Unit	Condition	
	D3	585.5	588.5	nm		
A	D4	588.5	591.5		I _F =20mA	
	D5	591.5	594.5			

Bin Range of Forward Voltage

Group	Bin	Min.	Max.	Unit	Condition	
	0	1.75	1.95	V		
В	1	1.95	2.15		I _F =20mA	
	2	2.15	2.35			

Notes:

1. Tolerance of Luminous Intensity: $\pm 11\%$

2.Tolerance of Dominant Wavelength: ±1nm

3. Tolerance of Forward Voltage: ± 0.1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 4 of 10





EVERLIGHT ELECTRONICS CO., LTD.


Technical Data Sheet TOP View LEDs


67-21/Y2C-AP1Q1B/2T


Typical Electro-Optical Characteristics Curves

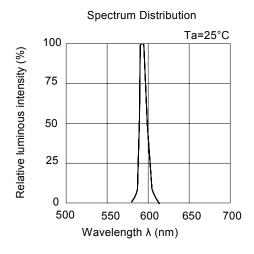


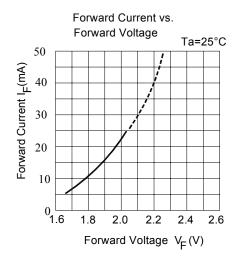










Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 5 of 10




67-21/Y2C-AP1Q1B/2T

Label Explanation

CAT: Luminous Intensity Rank HUE: Dom. Wavelength Rank REF: Forward Voltage Rank

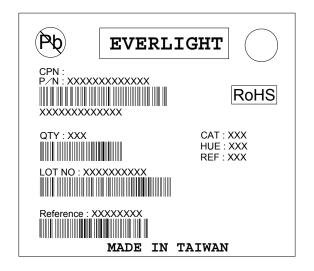

Reel Dimensions

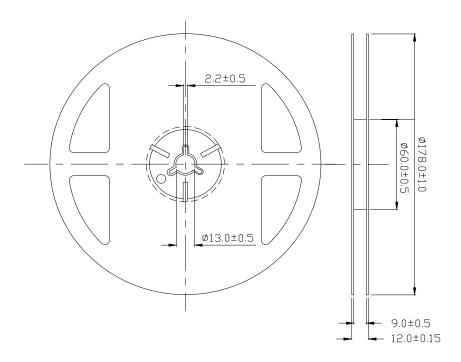


Note: The tolerances unless mentioned is ± 0.1 mm; Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 6 of 10




67-21/Y2C-AP1Q1B/2T

Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel.

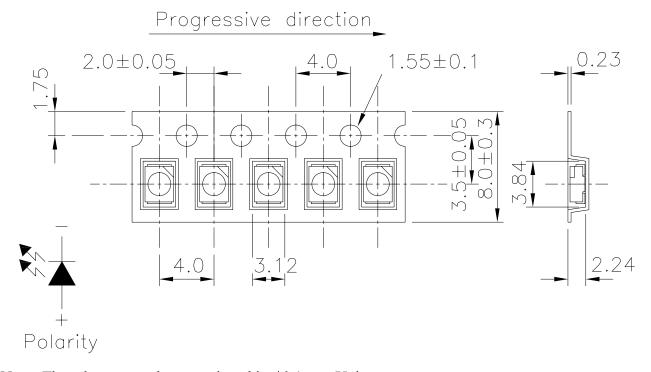

Note: The tolerances unless mentioned is ± 0.1 mm; Unit = mm

Moisture Resistant Packaging

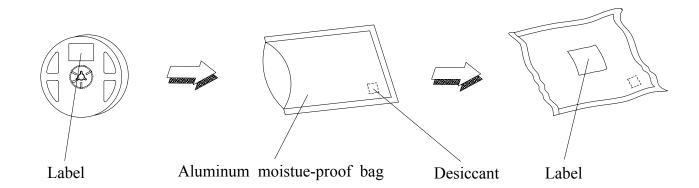

 $Everlight\ Electronics\ Co.,\ Ltd.$

Device No.:DSE-0001032

http://www.everlight.com

Prepared date: 11-Mar.-2009

Rev. 2

Page: 7 of 10

Prepared by: Rita Shen



67-21/Y2C-AP1Q1B/2T

Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H:+100°C 15min ∫ 5 min L:-40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min \int 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 8 of 10



67-21/Y2C-AP1Q1B/2T

Precautions for Use

1. Over-current-proof


Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30℃ or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life are 72 hours under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 60±5°C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

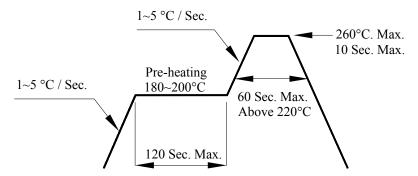

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 9 of 10



67-21/Y2C-AP1Q1B/2T

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

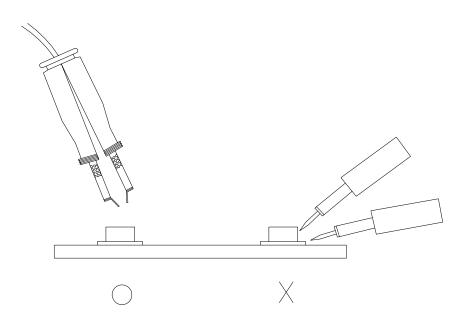

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 10 of 10