



## L1183A

Preliminary

CMOS IC

### 300mA CMOS LDO

#### DESCRIPTION

The UTC **L1183A** is a COMS positive linear regulator. One of it's feature is the very low quiescent current typical as low as 30 $\mu$ A and its dropout voltage is extremely low with 300mA output current.

The internal circuit includes thermal shutdown and current fold-back to prevent device failure when the circuit is operated in the bad conditions.

In application, the UTC **L1183A** needs a low noise, regulated supply. For stable operation, the output capacitance value should be 2.2 $\mu$ F or more.

The UTC **L1183A** is an ideal for battery applications, such as instrumentations, portable electronics, wireless devices, cordless phones, PC peripherals, and battery powered widgets.


#### FEATURES

- \* Accurate To Within 1.5%
- \* Quiescent Current: 30 $\mu$ A
- \* Internal Over-Temperature Shutdown
- \* With Current Limiting
- \* Internal Short Circuit Current Fold-Back
- \* Has Power-Saving Shutdown Mode
- \* Very Low Temperature Coefficient
- \* Halogen Free

#### ORDERING INFORMATION



Ordering Number	Package	Packing
L1183AG-xx-AF5-R	SOT-25	Tape Reel
L1183AG-xx-AG6-R	SOT-26	Tape Reel

Note: xx: Output Voltage, refer to Marking Information.

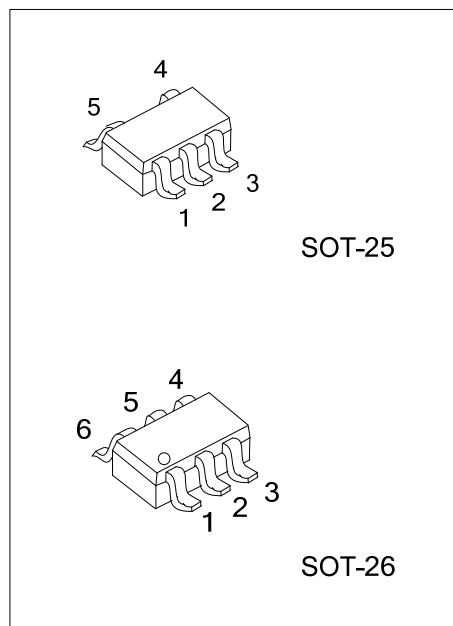


	(1) Packing Type	(1) R: Tape Reel
	(2) Package Type	(2) AF5: SOT-25, AG6: SOT-26
	(3) Output Voltage Code	(3) xx: Refer to Marking Information
	(4) Halogen Free	(4) G: Halogen Free


### MARKING INFORMATION

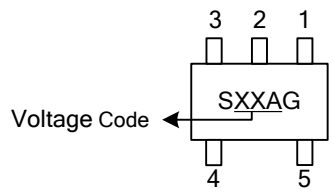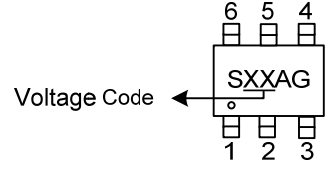PACKAGE	VOLTAGE CODE	MARKING
SOT-25	12 :1.2V 15 :1.5V 28 :2.8V	
SOT-26	31 :3.1V 33 :3.3V	

### PIN CONFIGURATION



SOT-25

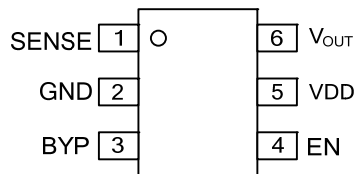


SOT-26

### PIN DESCRIPTION

PACKAGE	PIN NO.	PIN NAME	DESCRIPTION
SOP-25	1	V <sub>IN</sub>	Input for voltage input. A 1μF or greater capacitor should be placed in this pin.
	2	GND	Ground.
	3	EN	Enable pin. Pulling his pin low, can shut down the PMOS pass transistor, and the current consuming can be set less than 1μA.
	4	NC	
	5	V <sub>OUT</sub>	Output voltage pin. The capacitor which connected between this pin and GND should be decoupled with a 1μF or a greater value low ESR ceramic capacitor.
SOP-26	1	SENSE	Remote Sense.
	2	GND	Ground.
	3	BYP	Bypass capacitor for noise reduction.
	4	EN	Enable Input.
	5	VDD	Supply Input.
	6	V <sub>OUT</sub>	Output Voltage.

■ BLOCK DIAGRAM

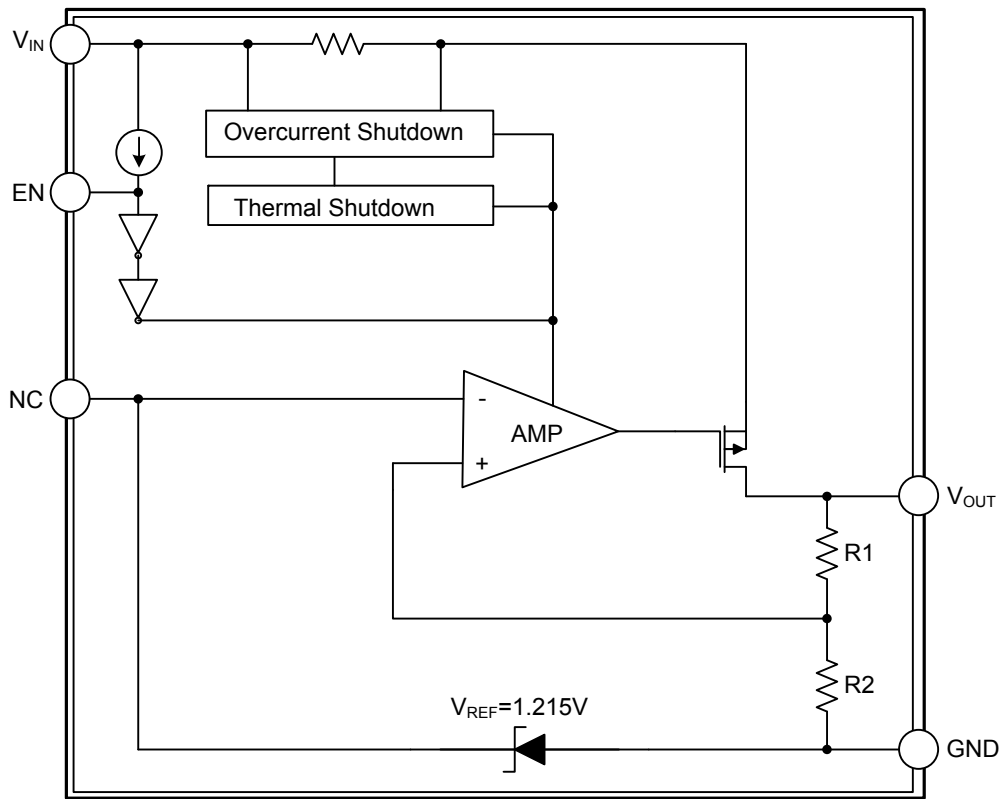

### ■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	$V_{IN}$	-0.3~ +8	V
Input Voltage (EN,BYP)		-0.3~ +8	V
Output Voltage	$V_{OUT}$	-0.3~ $V_{IN}+0.3$	V
Output Voltage	$I_{OUT}$	$P_D / (V_{IN} - V_{OUT})$	mA
Power Dissipation	$P_D$	400	mW
Junction Temperature	$T_J$	150	°C
Storage Temperature	$T_{STG}$	-65~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

### ■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATINGS	UNIT
Ambient Temperature	$T_a$	- 40~ +85	°C
Junction Temperature	$T_J$	- 40~ +125	°C
Storage Temperature	$T_{STG}$	-65~ +125	°C

### ■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	$\theta_{JA}$	280	°C/W
Junction to Case (Note)	$\theta_{JC}$	140	°C/W

Note:  $\theta_{JC}$  on center of molding compound if IC has on tab


### ■ ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ , Unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage	$V_{IN}$		Note1		6.5	V
Line Regulation	$\frac{\Delta V_{OUT}}{V_{OUT}}$	$V_{IN}=V_{OUT}+1\sim V_{OUT}+2$ $I_{OUT}=1\text{mA}$	$1.2\text{V}\leq V_{OUT}\leq 1.4\text{V}$	-0.2	0.2	%
			$1.4\text{V}<V_{OUT}\leq 2.0\text{V}$	-0.15	0.15	%
			$2.0\text{V}<V_{OUT}<4.0\text{V}$	-0.1	0.02	0.1
Load Regulation	$\frac{\Delta V_{OUT}}{V_{OUT}}$	$I_{OUT}=1\text{mA}\sim 300\text{mA}$	-1	0.2	1	%
Output Voltage Accuracy		$I_{OUT}=1\text{mA}$	-1.5		1.5	%
		$I_{OUT}=300\text{mA}$	-2.5		2.5	%
Quiescent Current	$I_Q$	$I_{OUT}=0\text{mA}$		30	50	$\mu\text{A}$
Dropout Voltage	$V_D$	$I_{OUT}=300\text{mA}$ $V_{OUT}=V_{O(NOM)}-2.0\%$	$1.2\text{V}\leq V_{O(NOM)}\leq 2.0\text{V}$		1300	mV
			$2.4\text{V}<V_{O(NOM)}\leq 2.8\text{V}$		400	mV
Power Supply Ripple Rejection	PSRR	$I_{OUT}=100\text{mA}$ $C_{OUT}=2.2\mu\text{F}$	$f=100\text{Hz}$	60		dB
			$f=1\text{kHz}$	50		dB
			$f=10\text{kHz}$	20		dB
Output Voltage Noise	eN	$I_{OUT}=10\text{mA}, C_{OUT}=2.2\mu\text{F}, f=10\text{Hz}\sim 100\text{kHz}$ ,		30		$\mu\text{V}_{RMS}$
Output Current	$I_{OUT}$	$V_{OUT}>1.2\text{V}$	300			mA
Current Limit	$I_{LIMIT}$	$V_{OUT}>1.2\text{V}$	300	450		mA
Short Circuit Current (Note2)	$I_{SC}$	$V_{OUT}<0.8\text{V}$		150	300	mA
Ground Pin Current	$I_{GND}$	$I_{OUT}=1\text{mA}\sim 300\text{mA}$		35		$\mu\text{A}$
Over Temperature Shutdown	OTS			150		°C
Over Temperature Hysteresis	OTH			30		°C
Temperature Coefficient of Output Voltage	$T_C V_O$			30		ppm/°C
EN Input Threshold	$V_{EH}$	$V_{IN}=2.7\text{V}\sim 6.5\text{V}$	2.0		$V_{IN}$	V
	$V_{EL}$	$V_{IN}=2.7\text{V}\sim 6.5\text{V}$	0		0.4	V
EN Input Bias Current	$I_{EH}$	$V_{EN}=V_{IN}, V_{IN}=2.7\text{V}\sim 6.5\text{V}$			0.1	$\mu\text{A}$
	$I_{EL}$	$V_{EN}=0\text{V}, V_{IN}=2.7\text{V}\sim 6.5\text{V}$			0.5	$\mu\text{A}$
Shutdown Supply Current	$I_{SD}$	$V_{IN}=5\text{V}, V_O=0\text{V}, V_{EN}<V_{EL}$		0.5	1	$\mu\text{A}$
Shutdown Output Voltage	$V_{SD}$	$I_O=0.4\text{mA}, V_{EN}<V_{EL}$	0		0.4	V

Notes: 1.  $V_{IN(MIN)} = V_{OUT} + V_D$

2. To prevent the short circuit current protection feature from being prematurely activated, the input voltage must be applied before a current source load is applied.

## ■ TYPICAL APPLICATION CIRCUIT

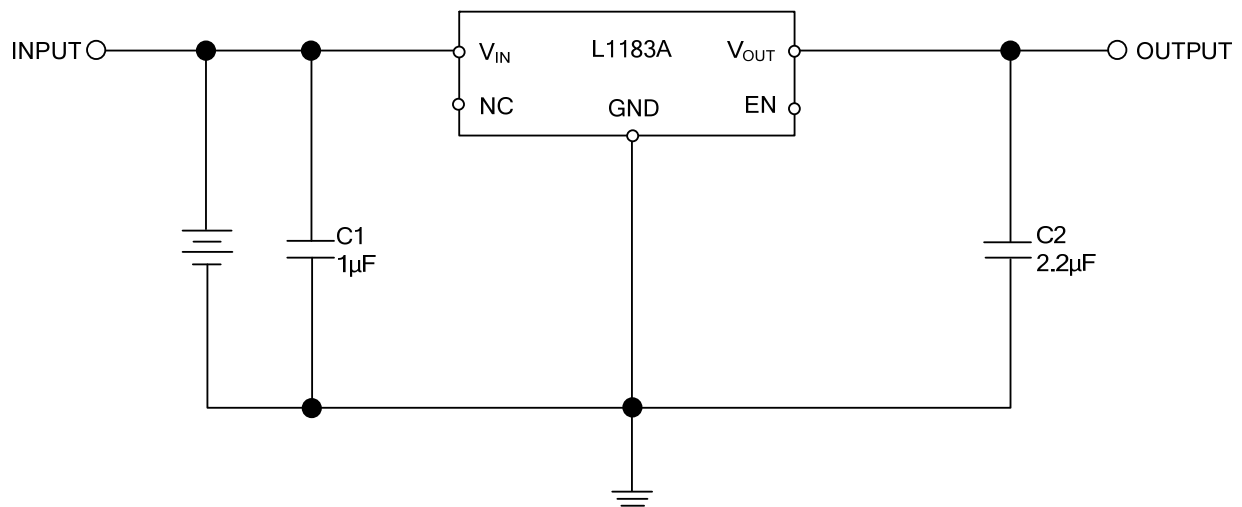

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.