



High-Performance 8-Bit Microcontrollers

Z8 Encore![®] 4K Series

Product Brief

PB014202-0904

Preliminary



Product Block Diagram

1–4KB Flash	256B–1KB RAM	Up to 8 10-Bit ADC Channels
Watch-Dog Timer with RC Oscillator	5MHz eZ8 CPU	Two 16-Bit Timers/PWM
		POR/VBO & Reset Control
UART with IrDA	On-Chip Debugger	Internal Precision Oscillator
Up to 24 General-Purpose I/O Pins		

Overview

The Z8 Encore![®] 4K Series devices are Flash microcontrollers based on the ZiLOG[®] eZ8 CPU. The Z8 Encore![®] 4K Series MCU family of devices sets a new standard for performance and on-chip peripherals.

The Z8 Encore![®] 4K Series devices support up to 4KB of Flash program memory and 1KB register RAM

The Z8 Encore![®] 4K Series devices feature up to eight single-ended/differential channels of 10-bit A/D conversion with 1x or 20x differential input gain.

These devices include two enhanced 16-bit timer blocks featuring PWMs and Capture and Compare.

Up to 18 vectored interrupts with programmable priorities provide increased application flexibility.

The Z8 Encore![®] 4K Series features an on-chip Internal Precision Oscillator (5MHz/32KHz) as a trimmable clock source that requires no external components.

The new single-pin debugger and programming interface simplifies code development and allows for easy in-circuit programming.

The full-duplex UART provides serial communications and IrDA encoding and decoding capability.

Features

- 5MHz eZ8 CPU core
- Up to 4KB Flash memory with in-circuit programming capability
- Up to 1KB register RAM
- Up to 8 channels 10-bit analog-to-digital converter (ADC)
- Full-duplex 9-bit UART with bus transceiver Driver Enable Control
- Infrared Data Association (IrDA)-compliant infrared encoder/decoders
- Two 16-bit timers with capture, compare, and PWM capability
- Watch-Dog Timer (WDT) with internal RC oscillator
- 16–24 I/O pins depending upon package
- Up to 18 interrupts with configurable priority
- On-Chip Debugger
- Voltage Brown-Out Protection (VBO)
- Power-On Reset (POR)
- Internal Precision Oscillator (5MHz/32KHz)



- 2.7–3.6V operating voltage with 5V-tolerant inputs
- 8-, 20- and 28-pin packages
- 0° to +70°C standard temperature and –40° to +105°C extended temperature operating ranges

eZ8 CPU Features

- New instructions for improved performance including BIT, BSWAP, BTJ, CPC, LDC, LDCI, LEA, MULT, and SRL
- New instructions support 12-bit linear addressing of the Register File
- Compatible with existing Z8[®] code
- Up to 10 MIPS operation
- C-Compiler friendly
- 2–9 clock cycles per instruction

Z8 Encore![®] 4K Series Development Kit

The Z8 Encore![®] 4K Series Development System includes the following:

Hardware

- Z8 Encore![®] 4K Series Development board

- Smart Cable for PC to Z8 Encore![®] 4K Series Development board (DB9 to 6-pin male)
- 5VDC power supply

Software on CD-ROM

- ZDS II–Z8 Encore![®] IDE with ANSI C-Compiler
- Sample code
- Document browser
- Acrobat Reader[®] install program

Documentation

- Quick Start Guide
- Registration card
- Z8 Encore![®] 4K Series technical documentation (on CD-ROM)
 - Development Kit User Manual
 - ZDSII IDE User Manual
 - eZ8 CPU User Manual
 - Product specification
 - Product brief
 - Application notes

Architecture

Figure 1 illustrates the Z8 Encore!® 4K Series block diagram.

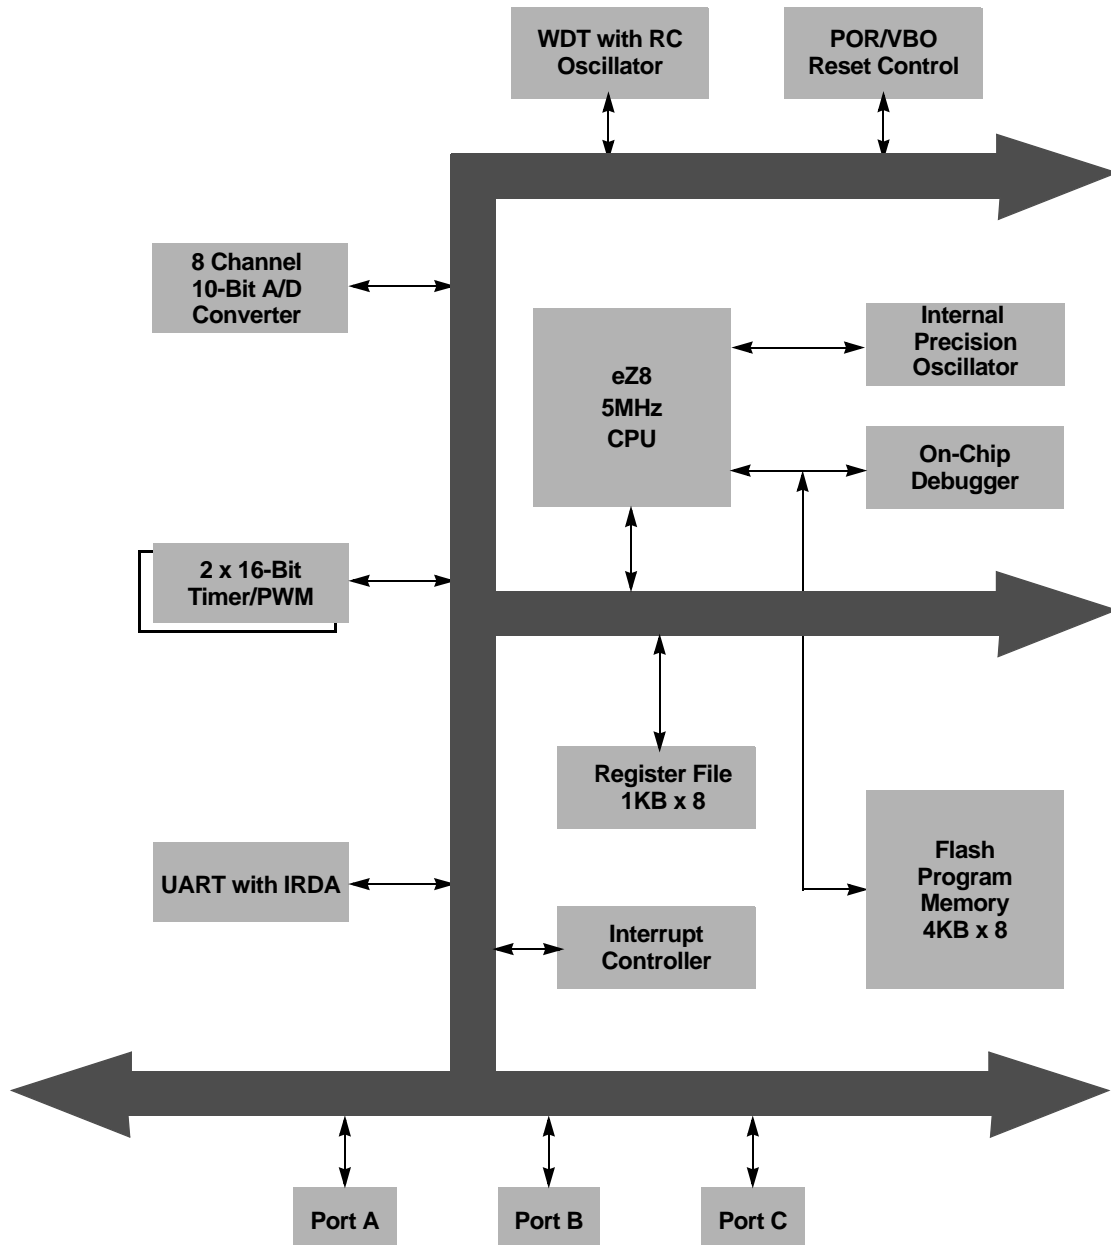


Figure 1. Z8 Encore!® 4K Series Block Diagram



Ordering Information

Order the Z8 Encore!® 4K Series from ZiLOG®, referencing the following part numbers. For more information regarding ordering, please consult your local ZiLOG® sales office. The ZiLOG® website at www.zilog.com lists all regional offices and provides additional Z8 Encore!® product information.

Part Number	Flash	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	UART with IrDA	Description
Z8 Encore!® with 4KB Flash, 10-Bit Analog-to-Digital Converter								
Standard Temperature: 0° to 70°C								
Z8F0423PB005SC	4KB	1KB	6	12	2	4	1	PDIP 8-pin package
Z8F0423SB005SC	4KB	1KB	6	12	2	4	1	SOIC 8-pin package
Z8F0423SH005SC	4KB	1KB	16	18	2	7	1	SOIC 20-pin package
Z8F0423HH005SC	4KB	1KB	16	18	2	7	1	SSOP 20-pin package
Z8F0423PH005SC	4KB	1KB	16	18	2	7	1	PDIP 20-pin package
Z8F0423SJ005SC	4KB	1KB	22	18	2	8	1	SOIC 28-pin package
Z8F0423HJ005SC	4KB	1KB	22	18	2	8	1	SSOP 28-pin package
Z8F0423PJ005SC	4KB	1KB	22	18	2	8	1	PDIP 28-pin package
Extended Temperature: -40° to 105°C								
Z8F0423PB005EC	4KB	1KB	6	12	2	4	1	PDIP 8-pin package
Z8F0423SB005EC	4KB	1KB	6	12	2	4	1	SOIC 8-pin package
Z8F0423SH005EC	4KB	1KB	16	18	2	7	1	SOIC 20-pin package
Z8F0423HH005EC	4KB	1KB	16	18	2	7	1	SSOP 20-pin package
Z8F0423PH005EC	4KB	1KB	16	18	2	7	1	PDIP 20-pin package
Z8F0423SJ005EC	4KB	1KB	22	18	2	8	1	SOIC 28-pin package
Z8F0423HJ005EC	4KB	1KB	22	18	2	8	1	SSOP 28-pin package
Z8F0423PJ005EC	4KB	1KB	22	18	2	8	1	PDIP 28-pin package



Part Number	Flash	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	UART with IrDA	Description
Z8 Encore!® with 4KB Flash								
Standard Temperature: 0° to 70°C								
Z8F0413PB005SC	4KB	1KB	6	12	2	0	1	PDIP 8-pin package
Z8F0413SB005SC	4KB	1KB	6	12	2	0	1	SOIC 8-pin package
Z8F0413SH005SC	4KB	1KB	16	18	2	0	1	SOIC 20-pin package
Z8F0413HH005SC	4KB	1KB	16	18	2	0	1	SSOP 20-pin package
Z8F0413PH005SC	4KB	1KB	16	18	2	0	1	PDIP 20-pin package
Z8F0413SJ005SC	4KB	1KB	24	18	2	0	1	SOIC 28-pin package
Z8F0413HJ005SC	4KB	1KB	24	18	2	0	1	SSOP 28-pin package
Z8F0413PJ005SC	4KB	1KB	24	18	2	0	1	PDIP 28-pin package
Extended Temperature: -40° to 105°C								
Z8F0413PB005EC	4KB	1KB	6	12	2	0	1	PDIP 8-pin package
Z8F0413SB005EC	4KB	1KB	6	12	2	0	1	SOIC 8-pin package
Z8F0413SH005EC	4KB	1KB	16	18	2	0	1	SOIC 20-pin package
Z8F0413HH005EC	4KB	1KB	16	18	2	0	1	SSOP 20-pin package
Z8F0413PH005EC	4KB	1KB	16	18	2	0	1	PDIP 20-pin package
Z8F0413SJ005EC	4KB	1KB	24	18	2	0	1	SOIC 28-pin package
Z8F0413HJ005EC	4KB	1KB	24	18	2	0	1	SSOP 28-pin package
Z8F0413PJ005EC	4KB	1KB	24	18	2	0	1	PDIP 28-pin package



Part Number	Flash	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	UART with IrDA	Description
Z8 Encore!® with 2KB Flash, 10-Bit analog-to-Digital Converter								
Standard Temperature: 0° to 70°C								
Z8F0223PB005SC	2KB	512B	6	12	2	4	1	PDIP 8-pin package
Z8F0223SB005SC	2KB	512B	6	12	2	4	1	SOIC 8-pin package
Z8F0223SH005SC	2KB	512B	16	18	2	7	1	SOIC 20-pin package
Z8F0223HH005SC	2KB	512B	16	18	2	7	1	SSOP 20-pin package
Z8F0223PH005SC	2KB	512B	16	18	2	7	1	PDIP 20-pin package
Z8F0223SJ005SC	2KB	512B	22	18	2	8	1	SOIC 28-pin package
Z8F0223HJ005SC	2KB	512B	22	18	2	8	1	SSOP 28-pin package
Z8F0223PJ005SC	2KB	512B	22	18	2	8	1	PDIP 28-pin package
Extended Temperature: -40° to 105°C								
Z8F0223PB005EC	2KB	512B	6	12	2	4	1	PDIP 8-pin package
Z8F0223SB005EC	2KB	512B	6	12	2	4	1	SOIC 8-pin package
Z8F0223SH005EC	2KB	512B	16	18	2	7	1	SOIC 20-pin package
Z8F0223HH005EC	2KB	512B	16	18	2	7	1	SSOP 20-pin package
Z8F0223PH005EC	2KB	512B	16	18	2	7	1	PDIP 20-pin package
Z8F0223SJ005EC	2KB	512B	22	18	2	8	1	SOIC 28-pin package
Z8F0223HJ005EC	2KB	512B	22	18	2	8	1	SSOP 28-pin package
Z8F0223PJ005EC	2KB	512B	22	18	2	8	1	PDIP 28-pin package



Part Number	Flash	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	UART with IrDA	Description
Z8 Encore!® with 2KB Flash								
Standard Temperature: 0° to 70°C								
Z8F0213PB005SC	2KB	512B	6	12	2	0	1	PDIP 8-pin package
Z8F0213SB005SC	2KB	512B	6	12	2	0	1	SOIC 8-pin package
Z8F0213SH005SC	2KB	512B	16	18	2	0	1	SOIC 20-pin package
Z8F0213HH005SC	2KB	512B	16	18	2	0	1	SSOP 20-pin package
Z8F0213PH005SC	2KB	512B	16	18	2	0	1	PDIP 20-pin package
Z8F0213SJ005SC	2KB	512B	24	18	2	0	1	SOIC 28-pin package
Z8F0213HJ005SC	2KB	512B	24	18	2	0	1	SSOP 28-pin package
Z8F0213PJ005SC	2KB	512B	24	18	2	0	1	PDIP 28-pin package
Extended Temperature: -40° to 105°C								
Z8F0213PB005EC	2KB	512B	6	12	2	0	1	PDIP 8-pin package
Z8F0213SB005EC	2KB	512B	6	12	2	0	1	SOIC 8-pin package
Z8F0213SH005EC	2KB	512B	16	18	2	0	1	SOIC 20-pin package
Z8F0213HH005EC	2KB	512B	16	18	2	0	1	SSOP 20-pin package
Z8F0213PH005EC	2KB	512B	16	18	2	0	1	PDIP 20-pin package
Z8F0213SJ005EC	2KB	512B	24	18	2	0	1	SOIC 28-pin package
Z8F0213HJ005EC	2KB	512B	24	18	2	0	1	SSOP 28-pin package
Z8F0213PJ005EC	2KB	512B	24	18	2	0	1	PDIP 28-pin package




Part Number	Flash	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	UART with IrDA	Description
Z8 Encore!® with 1KB Flash, 10-Bit Analog-to-Digital Converter								
Standard Temperature: 0° to 70°C								
Z8F0123PB005SC	1KB	256B	6	12	2	4	1	PDIP 8-pin package
Z8F0123SB005SC	1KB	256B	6	12	2	4	1	SOIC 8-pin package
Z8F0123SH005SC	1KB	256B	16	18	2	7	1	SOIC 20-pin package
Z8F0123HH005SC	1KB	256B	16	18	2	7	1	SSOP 20-pin package
Z8F0123PH005SC	1KB	256B	16	18	2	7	1	PDIP 20-pin package
Z8F0123SJ005SC	1KB	256B	22	18	2	8	1	SOIC 28-pin package
Z8F0123HJ005SC	1KB	256B	22	18	2	8	1	SSOP 28-pin package
Z8F0123PJ005SC	1KB	256B	22	18	2	8	1	PDIP 28-pin package
Extended Temperature: -40° to 105°C								
Z8F0123PB005EC	1KB	256B	6	12	2	4	1	PDIP 8-pin package
Z8F0123SB005EC	1KB	256B	6	12	2	4	1	SOIC 8-pin package
Z8F0123SH005EC	1KB	256B	16	18	2	7	1	SOIC 20-pin package
Z8F0123HH005EC	1KB	256B	16	18	2	7	1	SSOP 20-pin package
Z8F0123PH005EC	1KB	256B	16	18	2	7	1	PDIP 20-pin package
Z8F0123SJ005EC	1KB	256B	22	18	2	8	1	SOIC 28-pin package
Z8F0123HJ005EC	1KB	256B	22	18	2	8	1	SSOP 28-pin package
Z8F0123PJ005EC	1KB	256B	22	18	2	8	1	PDIP 28-pin package



Part Number	Flash	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	UART with IrDA	Description
Z8 Encore!® with 1KB Flash								
Standard Temperature: 0° to 70°C								
Z8F0113PB005SC	1KB	256B	6	12	2	0	1	PDIP 8-pin package
Z8F0113SB005SC	1KB	256B	6	12	2	0	1	SOIC 8-pin package
Z8F0113SH005SC	1KB	256B	16	18	2	0	1	SOIC 20-pin package
Z8F0113HH005SC	1KB	256B	16	18	2	0	1	SSOP 20-pin package
Z8F0113PH005SC	1KB	256B	16	18	2	0	1	PDIP 20-pin package
Z8F0113SJ005SC	1KB	256B	24	18	2	0	1	SOIC 28-pin package
Z8F0113HJ005SC	1KB	256B	24	18	2	0	1	SSOP 28-pin package
Z8F0113PJ005SC	1KB	256B	24	18	2	0	1	PDIP 28-pin package
Extended Temperature: -40° to 105°C								
Z8F0113PB005EC	1KB	256B	6	12	2	0	1	PDIP 8-pin package
Z8F0113SB005EC	1KB	256B	6	12	2	0	1	SOIC 8-pin package
Z8F0113SH005EC	1KB	256B	16	18	2	0	1	SOIC 20-pin package
Z8F0113HH005EC	1KB	256B	16	18	2	0	1	SSOP 20-pin package
Z8F0113PH005EC	1KB	256B	16	18	2	0	1	PDIP 20-pin package
Z8F0113SJ005EC	1KB	256B	24	18	2	0	1	SOIC 28-pin package
Z8F0113HJ005EC	1KB	256B	24	18	2	0	1	SSOP 28-pin package
Z8F0113PJ005EC	1KB	256B	24	18	2	0	1	PDIP 28-pin package
Z8F04328100KIT								Development Kit



Part Number Suffix Designations

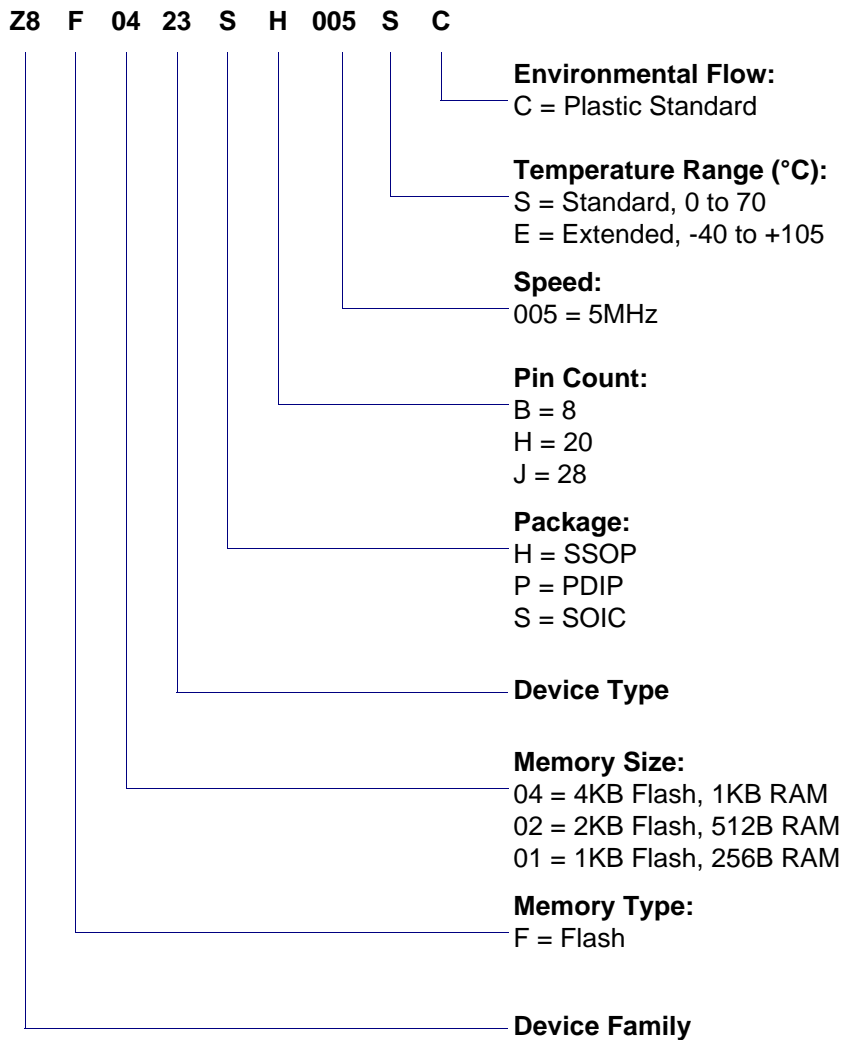



This publication is subject to replacement by a later edition. To determine whether a later edition exists, or to request copies of publications, contact:

ZiLOG Worldwide Headquarters

532 Race Street
San Jose, CA 95126
Telephone: 408.558.8500
Fax: 408.558.8300
www.ZiLOG.com

Document Disclaimer

ZiLOG is a registered trademark of ZiLOG Inc. in the United States and in other countries. All other products and/or service names mentioned herein may be trademarks of the companies with which they are associated.

©2004 by ZiLOG, Inc. All rights reserved. Information in this publication concerning the devices, applications, or technology described is intended to suggest possible uses and may be superseded. ZiLOG, INC. DOES NOT ASSUME LIABILITY FOR OR PROVIDE A REPRESENTATION OF ACCURACY OF THE INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED IN THIS DOCUMENT. ZiLOG ALSO DOES NOT ASSUME LIABILITY FOR INTELLECTUAL PROPERTY INFRINGEMENT RELATED IN ANY MANNER TO USE OF INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED HEREIN OR OTHERWISE. Except with the express written approval ZiLOG, use of information, devices, or technology as critical components of life support systems is not authorized. No licenses or other rights are conveyed, implicitly or otherwise, by this document under any intellectual property rights.