

October 1991

DESCRIPTION

The SSI 75T204 is a complete Dual-Tone Multifrequency (DTMF) receiver that detects 16 standard digits. No front-end pre-filtering is needed. The only external components required are an inexpensive 3.58-MHz television "colorburst" crystal for frequency reference and a bias resistor. An Alternate Time Base (ATB) is provided to permit operation of up to 10 SSI 75T204's from a single crystal. The SSI 75T204 employs state-of-the-art "switched-capacitor" filter technology, resulting in approximately 40 poles of filtering, and digital circuitry on the same CMOS chip. The analog input signal is pre-processed by 60-Hz reject and band split filters and then zero-cross detected to provide AGC. Eight bandpass filters detect the individual tones. Digital processing is used to


(Continued)

FEATURES

- Intended for applications with less requirements than the SSI 75T202
- 14-pin plastic DIP or 16-pin SO package for high system density
- NO front-end band-splitting filters required
- Single low-tolerance 5-volt supply
- Detects all 16 standard DTMF digits.
- Uses an inexpensive 3.579545-MHz crystal
- Excellent speech immunity
- Output in 4-bit hexadecimal code
- Three-state outputs for microprocessor interface

4

BLOCK DIAGRAM

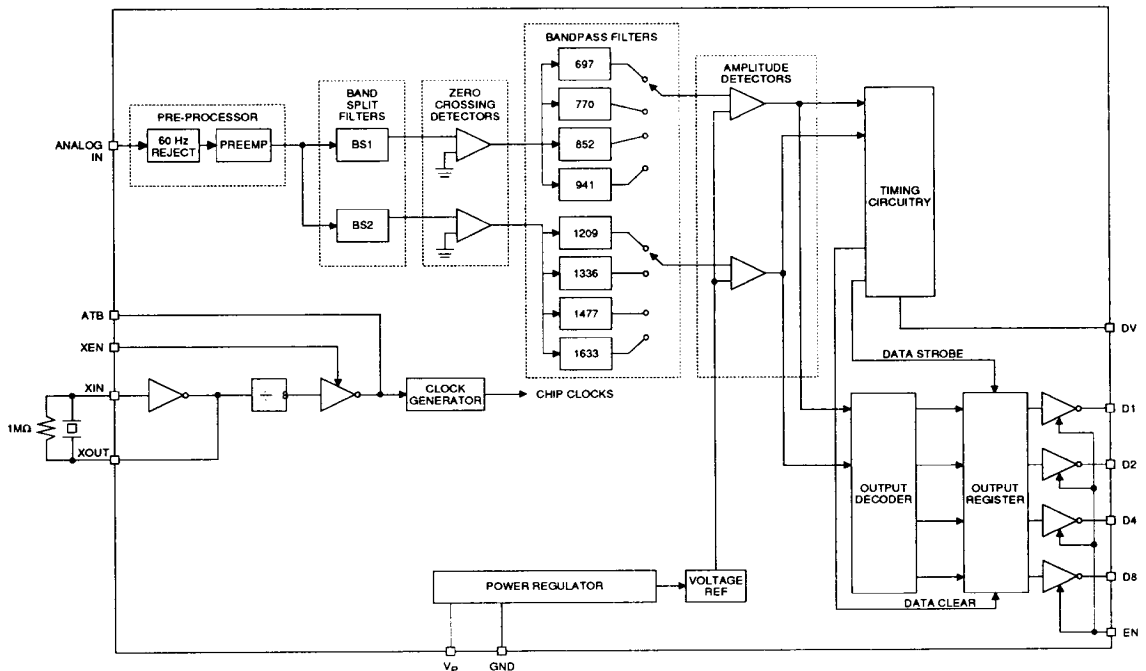

CAUTION: Use handling procedures necessary for a static sensitive component.

SSI 75T204

5V Low-Power

Subscriber DTMF Receiver

DESCRIPTION (Continued)

measure the tone and pause durations and to provide output timing and decoding. The outputs interface directly to standard CMOS circuitry and are three-state enabled to facilitate bus-oriented architectures.

ANALOG IN

This pin accepts the analog input. It is internally biased so that the input signal may be AC coupled. The input may be DC coupled as long as it does not exceed the positive supply. Proper input coupling is illustrated in Figure 1.

The SSI 75T204 is designed to accept sinusoidal input wave forms but will operate satisfactorily with any input that has the correct fundamental frequency with harmonics less than -20 dB below the fundamental.

CRYSTAL OSCILLATOR

The SSI 75T204 contains an onboard inverter with sufficient gain to provide oscillation when connected to a low-cost television "colorburst" crystal. The crystal oscillator is enabled by tying XEN high. The crystal is connected between XIN and XOUT. A 1 M Ω 10% resistor is also connected between these pins. In this mode, ATB is a clock frequency output. Other SSI 75T204's (or 75T202's) may use the same frequency reference by tying their ATB pins to the ATB of a crystal connected device. XIN and XEN of the auxiliary devices must then be tied high and low respectively. Ten devices may run off a single crystal-connected SSI 75T204 (or 75T202) as shown in Figure 2.

OUTPUTS D1, D2, D4, D8 and EN

Outputs D1, D2, D4, D8 are CMOS push-pull when enabled (EN high) and open circuited (high impedance) when disabled by pulling EN low. These digital outputs provide the hexadecimal code corresponding to the detected digit. The digital outputs become valid after a tone pair has been detected (DV is high) and they are then cleared when a valid pause is timed. The hexadecimal codes are described in Table 1.

DV

DV signals a detection by going high after a valid tone pair is sensed and decoded at the output pins D1, D2, D4, and D8. DV remains high until a valid pause occurs.

N/C PINS

These pins have no internal connection and may be left floating.

Output Code				
Digit	D8	D4	D2	D1
1	0	0	0	1
2	0	0	1	0
3	0	0	1	1
4	0	1	0	0
5	0	1	0	1
6	0	1	1	0
7	0	1	1	1
8	1	0	0	0
9	1	0	0	1
0	1	0	1	0
*	1	0	1	1
#	1	1	0	0
A	1	1	0	1
B	1	1	1	0
C	1	1	1	1
D	0	0	0	0

TABLE 1: Output Codes

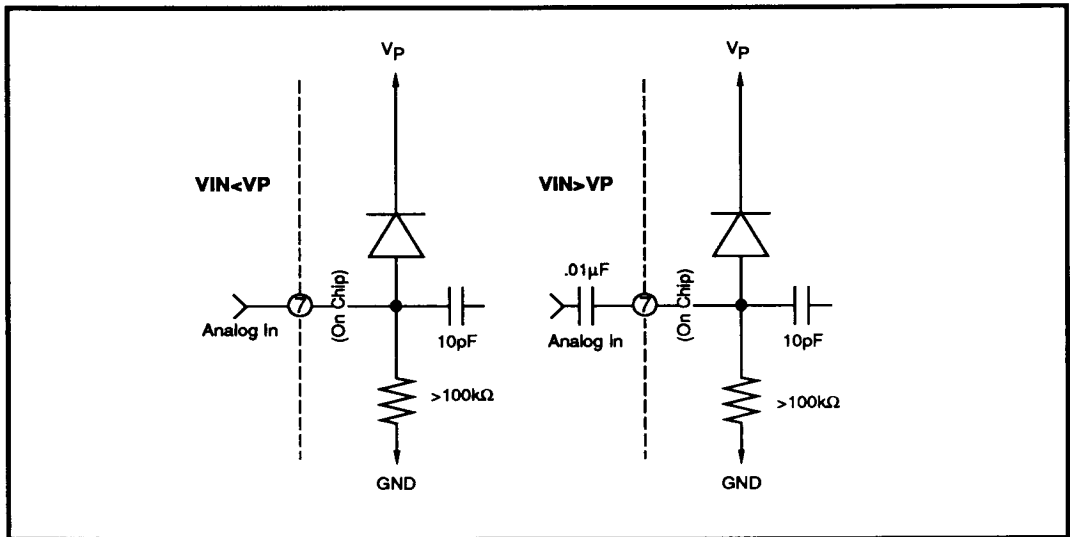


FIGURE 1: Input Coupling

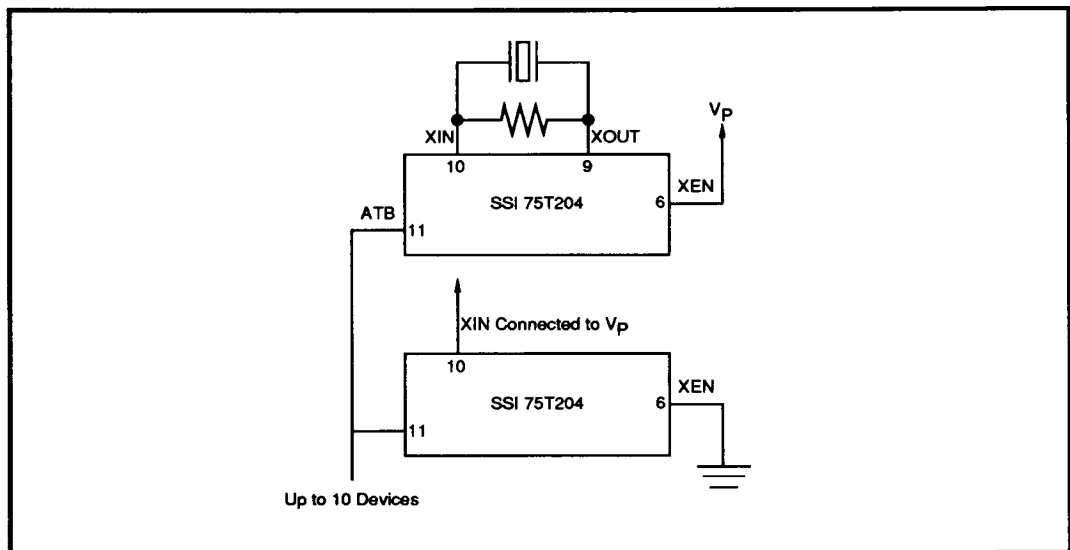


FIGURE 2: Crystal Connections

SSI 75T204

5V Low-Power

Subscriber DTMF Receiver

DTMF DIALING MATRIX

See Figure 3. Please note that column 3 is for special applications and is not normally used in telephone dialing.

	Col 0	Col 1	Col 2	Col 3
Row 0	1	2	3	A
Row 1	4	5	6	B
Row 2	7	8	9	C
Row 3	*	0	#	D

FIGURE 3: DTMF Dialing Matrix

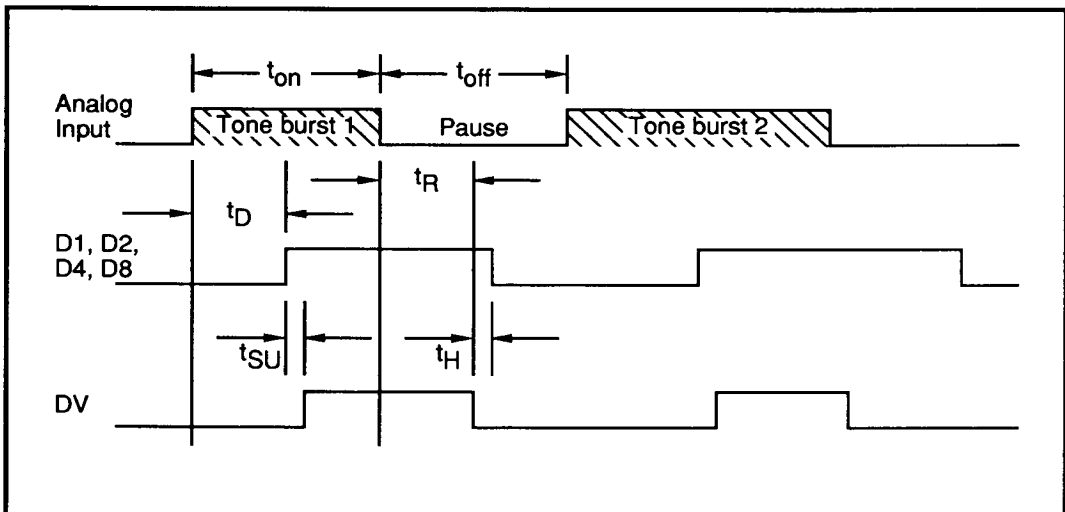


FIGURE 4: Timing Diagram

SSI 75T204

5V Low-Power

Subscriber DTMF Receiver

4

DETECTION FREQUENCY

Low Group f_o	High Group f_o
Row 0 = 697 Hz	Column 0 = 1209 Hz
Row 1 = 770 Hz	Column 1 = 1336 Hz
Row 2 = 852 Hz	Column 2 = 1477 Hz
Row 3 = 941 Hz	Column 3 = 1633 Hz

SSI 75T204 TIMING (Refer to Figure 4.)

PARAMETER	CONDITIONS	MIN	NOM	MAX	UNITS
ton Tone Time	for detection	40	-	-	ms
	for rejection	-	-	20	ms
toff Pause Time	for detection	40	-	-	ms
	for rejection	-	-	20	ms
td Detect Time		25	-	46	ms
tr Release Time		35	-	50	ms
tsu Data Setup Time		7	-	-	μ s
th Data Hold Time		4.2	-	5.0	ms
Output Enable Time	$C_L = 50\text{pF}$, $R_L = 1\text{k}\Omega$	-	-	200	ns
Output Disable Time	$C_L = 35\text{pF}$, $R_L = 500\Omega$	-	-	200	ns
Output Rise Time	$C_L = 50\text{pF}$	-	-	200	ns
Output Fall Time	$C_L = 50\text{pF}$	-	-	200	ns

SSI 75T204

5V Low-Power

Subscriber DTMF Receiver

APPLICATION INFORMATION

The SSI 75T204 will tolerate total input RMS noise up to 12dB below the lowest amplitude tone. For most telephone applications, the combination of the high frequency attenuation of the telephone line and internal band-limiting make special circuitry at the input to the SSI 75T204 unnecessary. However, noise near the 56kHz internal sampling frequency will be aliased (folded back) into the audio spectrum, so if excessive

noise is present above 28kHz, the simple RC filter shown in Figure 5 may be employed to band limit the incoming signal.

Noise will also be reduced by placing a grounded trace around the XIN and XOUT pins on the circuit board layout when using a crystal. It is important to note that XOUT is not intended to drive an additional device. XIN may be driven externally; in this case leave XOUT floating.

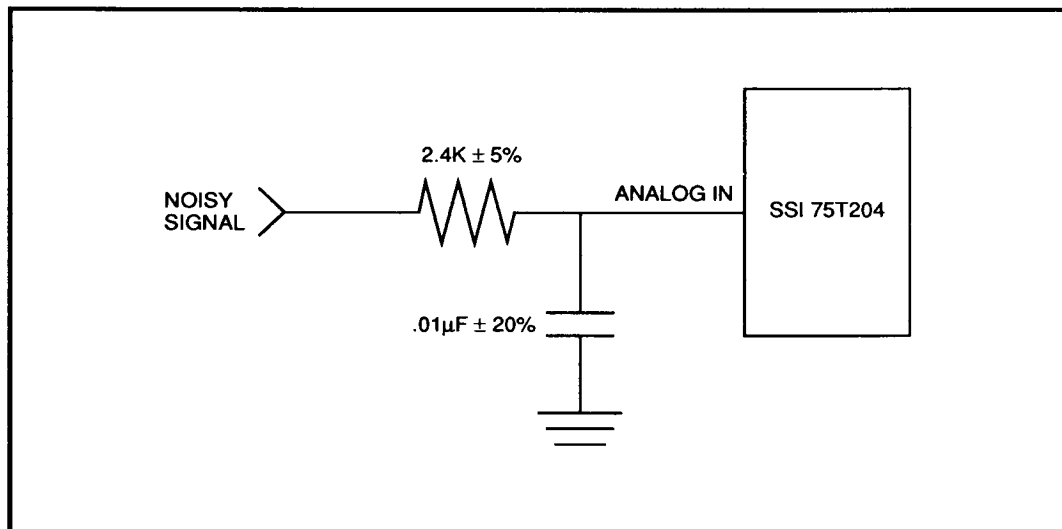


FIGURE 5: RC Filter

SSI 75T204

5V Low-Power

Subscriber DTMF Receiver

ABSOLUTE MAXIMUM RATINGS

(Operation above absolute maximum ratings may damage the device. All SSI 75T204 unused inputs must be connected to V_P or GND, as appropriate.)

PARAMETER	CONDITIONS	RATING
DC Supply Voltage - V_P		+7V
Operating Temperature		-40°C to +85°C Ambient
Storage Temperature		-65°C to +150°C
Power Dissipation (25°C)		65mW
Input Voltage	All inputs except ANALOG IN	($V_P + 0.5V$) to -0.5V
ANALOG IN Voltage		($V_P + .5V$) to ($V_P - 10V$)
DC Current into any Input		$\pm 1.0mA$
Lead Temperature	Soldering, 10 sec.	300°C

4

ELECTRICAL CHARACTERISTICS

(-40°C $\leq T_A \leq$ +85°C, $V_P = 5V \pm 10\%$)


PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Frequency Detect Bandwidth		$\pm(1.5+2Hz)$	± 2.3	± 3.5	% of f_0
Amplitude for Detection	each tone	-32		-2	dBm ref. to 600 Ω
Twist Tolerance	$Twist = \frac{High\ Tone}{Low\ Tone}$	-10		+10	dB
60-Hz Tolerance				0.8	Vrms
Dial Tone Tolerance	"precise" dial tone			0dB	dB*
Talk Off	MITEL tape #CM 7290		2		hits
Digital Outputs (except XOUT)	"0" level, 400 μA load	0		0.5	V
	"1" level, 200 μA load	$V_P - 0.5$		V_P	V
Digital Inputs	"0" level	0		0.3 V_P	V
	"1" level	0.7 V_P		V_P	V
Power Supply Noise	wide band			10	mV p-p
Supply Current	$T_A = 25^\circ C$		10	16	mA
Noise Tolerance	MITEL tape #CM 7290			-12	dB*
Input Impedance	$V_P \geq V_{IN} \geq V_P - 10$	100K Ω 15pF			
* dB referenced to lowest amplitude tone					

SSI 75T204


5V Low-Power

Subscriber DTMF Receiver

PACKAGE PIN DESIGNATIONS (TOP VIEW)

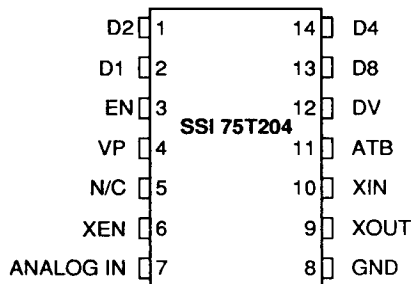

14 - Pin DIP

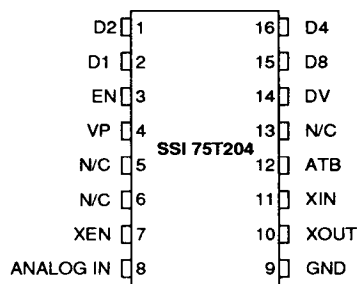

16 - Lead SOL

ORDERING INFORMATION

PART DESCRIPTION	ORDER NO.	PKG. MARK
SSI 75T204 14-pin PDIP	75T204-IP	75T204-IP
SSI 75T204 16-lead SOL	75T204-IL	75T204-IL

No responsibility is assumed by Silicon Systems for use of this product nor for any infringements of patents and trademarks or other rights of third parties resulting from its use. No license is granted under any patents, patent rights or trademarks of Silicon Systems. Silicon Systems reserves the right to make changes in specifications at any time without notice. Accordingly, the reader is cautioned to verify that the data sheet is current before placing orders.

Silicon Systems, Inc., 14351 Myford Road, Tustin, CA 92680, (714) 573-6000, FAX: (714) 573-6914