



## DUAL HIGH OUTPUT POWER OPERATIONAL AMPLIFIER


## NJM3414

The NJM3414 integrated circuit is a high gain, high output current, high output voltage swing dual operational amplifier capable of driving 70mA.


■ Absolute Maximum Ratings ( $T_a = 25^\circ C$ )

Supply Voltage	$V^+$ ( $V^+/V^-$ )	15V (or $\pm 7.5V$ )
Differential Input Voltage	$V_{ID}$	15V
Input Voltage	$V_I$	$-0.3 \sim +15V$
Power Dissipation	$P_D$ (D-Type) (M-Type) (L-Type)	500mW 300mW 800mW
Operating Temperature Range	$T_{opr}$	$-20 \sim +75^\circ C$
Storage Temperature Range	$T_{stg}$	$-40 \sim +125^\circ C$



## ■ Package Outline

■ Electrical Characteristics ( $T_a = 25^\circ C$ ,  $V^+ = 8.6V$ )







Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Offset Voltage	$V_{IO}$	$R_S = 0\Omega$	—	2	5	mV
Input Offset Current	$I_{IO}$		—	$\pm 30$	$\pm 100$	nA
Input Bias Current	$I_B$		—	100	500	nA
Large Signal Voltage Gain	$A_V$	$R_L = 2k\Omega$	88	100	—	dB
Input Common Voltage Range	$V_{ICM}$	$V^+ - 2$	—	—	—	V
Maximum Output Voltage Swing 1	$V_{OM1}$	$R_L \geq 2k\Omega$ , $V^+ = 5V$	3.5	—	—	V
Maximum Output Voltage Swing 2	$V_{OM2}$	$I_O = 70mA$ , $V^+ = 5V$	3.2	—	—	V
Common Mode Rejection Ratio	CMR		80	90	—	dB
Supply Voltage Rejection Ratio	SVR		80	90	—	dB
Supply Current	$I_{CC}$	$R_L = \infty$	—	4	5	mA
Slew Rate	SR		—	1.0	—	$V/\mu S$
Unity Gain Bandwidth	GB		—	1.3	—	MHz
Operating Voltage Range	$V^+$		—	—	10	V

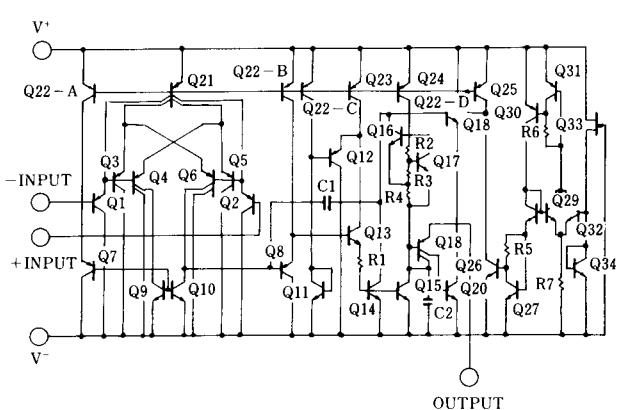■ Equivalent Circuit ( $1/2$  Shown)

## ■ Connection Diagrams

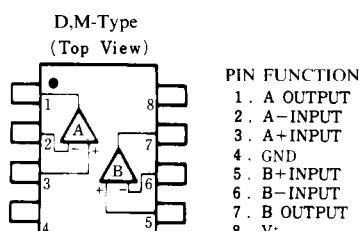

## ■ Typical Characteristics

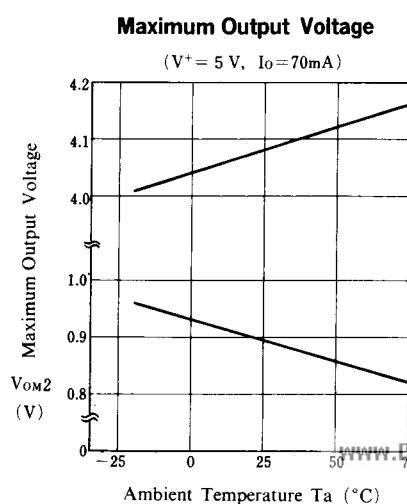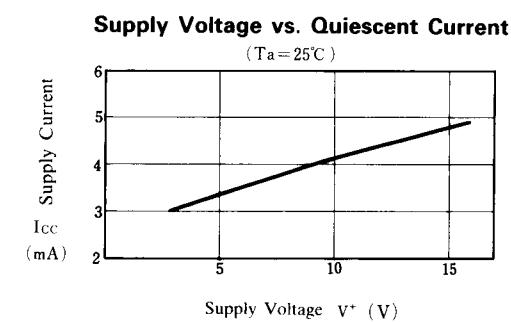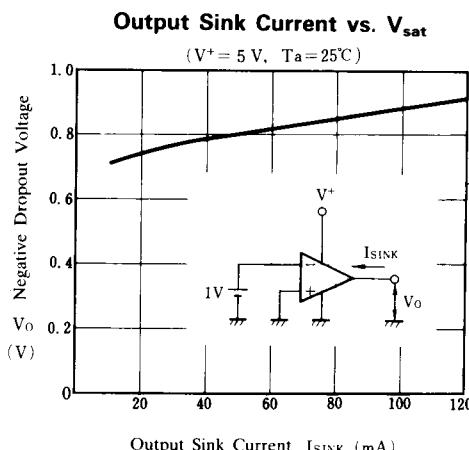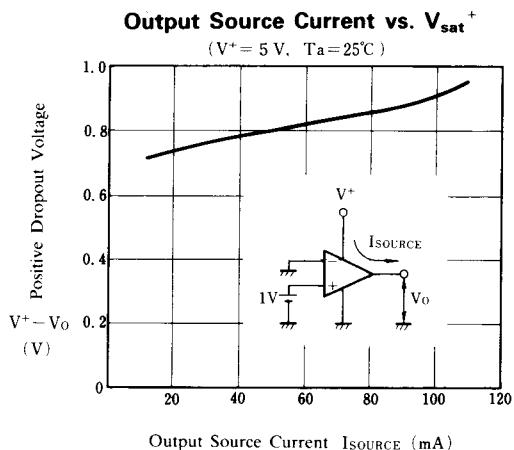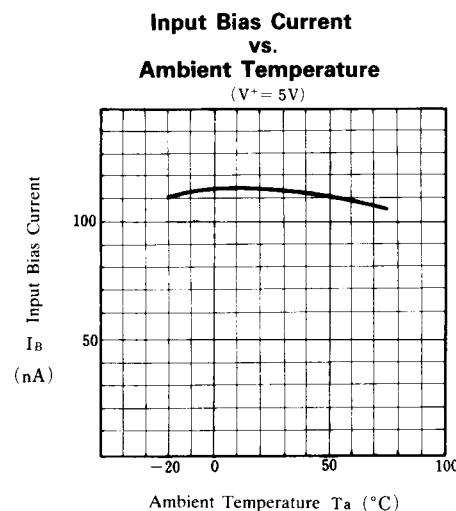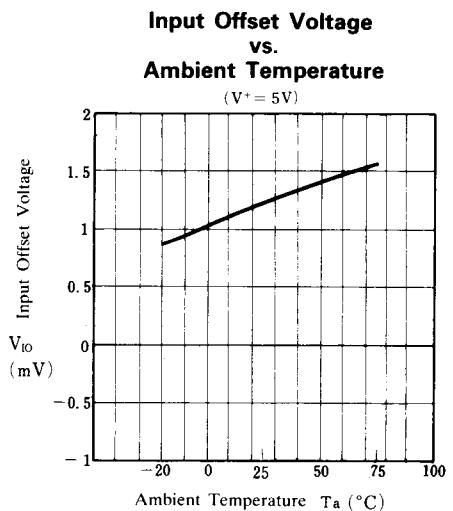

**NJM3414****■ Typical Characteristics**