

### R×5VT SERIES

#### OUTLINE

The R×5VT Series are voltage detector ICs with high detector threshold accuracy and ultra-low supply current by CMOS process, which can be operated at an extremely low voltage and is used, for instance, for system reset.

Each of these ICs consists of a voltage reference unit, a comparator, resistors for voltage detection, an output driver and a hysteresis circuit. The detector threshold is fixed with high accuracy.

The R×5VT Series are operable by a lower voltage than that for the R×5VL Series, and can be driven by a single battery.

Two output types, Nch open drain type and CMOS type, are available. Three types of packages, TO-92, SOT-89 (Mini-power Mold), SOT-23-5 (Mini-mold), are available.

#### FEATURES

- Ultra-low Supply Current .....TYP. 0.8 $\mu$ A ( $V_{DD}=1.5V$ )
- Broad Operating Voltage Range ..... 0.7V to 10.0V ( $T_{opt}=25^{\circ}C$ )
- Detector Threshold .....Stepwise setting with a step of 0.1V in the range of 0.9V to 6.0V  
is possible (refer to Selection Guide).
- High Accuracy Detector Threshold ..... $\pm 2.5\%$
- Low Temperature-Drift Coefficient of Detector Threshold .....TYP.  $\pm 100ppm/^{\circ}C$
- Two Output Types .....Nch Open Drain and CMOS
- Three Types of Packages .....TO-92, SOT-89 (Mini-power Mold), SOT-23-5 (Mini-mold)


#### APPLICATIONS

- CPU & Logic Circuit Reset
- Battery Checker
- Window Comparator
- Wave Shaping Circuit
- Battery Back-Up Circuit
- Power Failure Detector


7744690 0003862 T71

# BLOCK DIAGRAMS


## • Nch Open Drain Output (RX5VTxA)

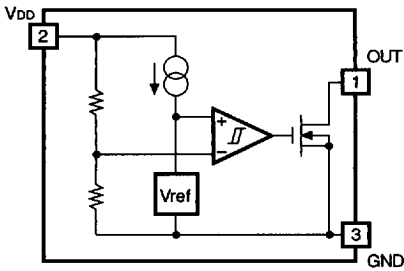


## • CMOS Output (RX5VTC)

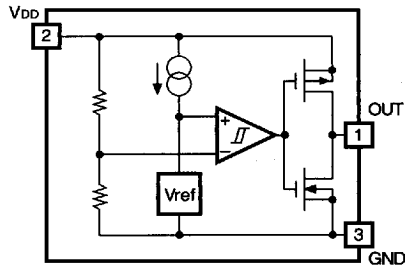


# TIME CHART

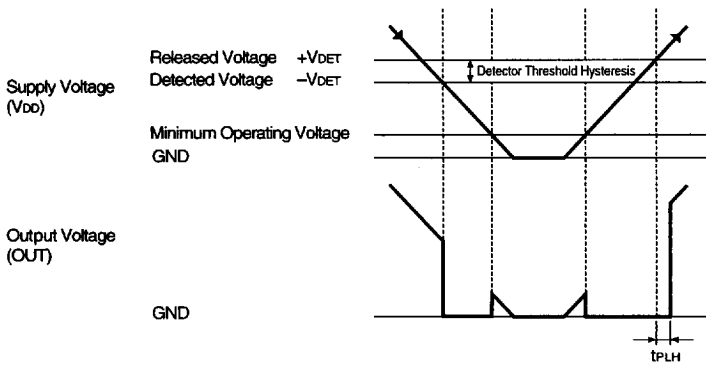

# DEFINITION OF OUTPUT DELAY TIME tPLH

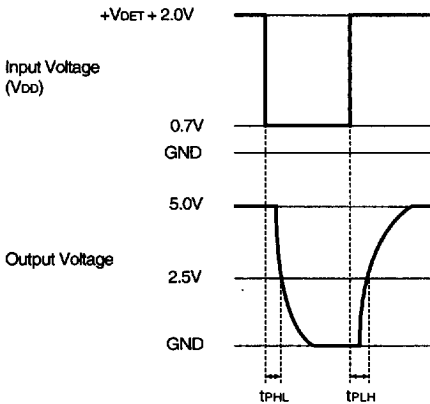

Nch Open Drain Output

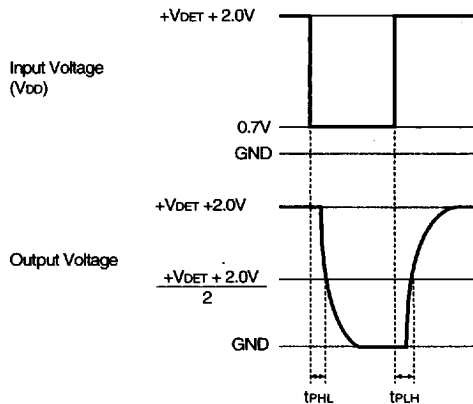

CMOS Output

7744690 0003863 908



Output Delay Time  $t_{PLH}$  is defined as follows:

1. In the case of Nch Open Drain Output:

When the time at which a pulse voltage which increases from 0.7V to  $+V_{DET}+2.0V$  is applied to VDD is Time A, and the time at which the output voltage reaches 2.5V under the conditions that the output pin (OUT) is pulled up to 5V by a resistor of 470k $\Omega$  is Time B, the time period from Time A through Time B.

2. In the case of CMOS Output:

When the time at which a pulse voltage which increases from 0.7V to  $+V_{DET}+2.0V$  is applied to VDD is Time A, and the time at which the output voltage reaches the voltage of  $(+V_{DET}+2.0V)/2$  is Time B, the time period from Time A through Time B.

7744690 0003864 844

**RICOH**

## SELECTION GUIDE

The package type, the detector threshold, the output type, the packing type, and the taping type of RX5VT series can be designating at the user's request by specifying the part number as follows:

RX5VT XXXX-XX ← Part Number  
 ↑     ↑ ↑ ↑    ↑  
 a     b c d e

Code	Contents
a	Designation of Package Type: E: TO-92 H: SOT-89 (Mini-power Mold) N: SOT-23-5 (Mini-mold)
b	Setting Detector Threshold (-VDET): Stepwise setting with a step of 0.1V in the range of 0.9V to 6.0V is possible.
c	Designation of Output Type: A: Nch Open Drain C: CMOS
d	Designation of Packing Type: A: Taping C: Antistatic bag for TO-92 and samples
e	Designation of Taping Type: Ex. TO-92: RF, RR, TZ SOT-89: T1, T2 SOT-23-5: TR, TL (refer to Taping Specifications) "TZ", "T1" and "TR" are prescribed as a standard


For example, the product with Package Type SOT-89, Detector Threshold 3.5V, Output Type Nch Open Drain and Taping Type T1, is designated by Part Number RH5VT35AA-T1.

7744690 0003865 780




## PIN CONFIGURATION


• TO-92



• SOT-89



• SOT-23-5



## PIN DESCRIPTION

• TO-92

Pin No.	Symbol
1	OUT
2	V <sub>DD</sub>
3	GND

• SOT-89

Pin No.	Symbol
1	OUT
2	V <sub>DD</sub>
3	GND

• SOT-23-5

Pin No.	Symbol
1	OUT
2	V <sub>DD</sub>
3	GND
4	NC
5	NC

7744690 0003866 617

**RICOH**

## ABSOLUTE MAXIMUM RATINGS

T<sub>opt</sub>=25°C

Symbol	Item	Rating		Unit
V <sub>DD</sub>	Supply Voltage	12		V
V <sub>OUT</sub>	Output Voltage	CMOS	V <sub>SS</sub> -0.3 to V <sub>DD</sub> +0.3	V
		Nch	V <sub>SS</sub> -0.3 to 12	
I <sub>OUT</sub>	Output Current	70		mA
PD1	Power Dissipation 1 (NOTE1)	300		mW
PD2	Power Dissipation 2 (NOTE2)	150		mW
T <sub>opt</sub>	Operating Temperature Range	-30 to +80		°C
T <sub>stg</sub>	Storage Temperature Range	-55 to +125		°C
T <sub>solder</sub>	Lead Temperature (Soldering)	260°C,10s		

(NOTE 1) applied to SOT-89 and TO-92

(NOTE 2) applied to SOT-23-5

## ABSOLUTE MAXIMUM RATINGS

Absolute Maximum ratings are threshold limit values that must not be exceeded even for an instant under any conditions. Moreover, such values for any two items must not be reached simultaneously. Operation above these absolute maximum ratings may cause degradation or permanent damage to the device. These are stress ratings only and do not necessarily imply functional operation below these limits.

7744690 0003867 553



## ELECTRICAL CHARACTERISTICS

## • R×5VT09A/C

T<sub>opt</sub>=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit	Note
-V <sub>DET</sub>	Detector Threshold		0.878	0.900	0.922	V	
V <sub>HYS</sub>	Detector Threshold Hysteresis		0.027	0.045	0.063	V	
I <sub>SS</sub>	Supply Current	V <sub>DD</sub> =0.80V		0.8	2.4	μA	
		V <sub>DD</sub> =2.90V		0.9	2.7		
V <sub>DDH</sub>	Maximum Operating Voltage				10	V	
V <sub>DDL</sub>	Minimum Operating Voltage	T <sub>opt</sub> =25°C		0.55	0.70	V	Note 1
		-30°C≤T <sub>opt</sub> ≤80°C		0.65	0.80		
I <sub>OUT</sub>	Output Current	Nch	V <sub>DS</sub> =0.05V, V <sub>DD</sub> =0.70V	0.01	0.05	mA	
			V <sub>DS</sub> =0.50V, V <sub>DD</sub> =0.85V	0.05	0.50		
		Pch	V <sub>DS</sub> =-2.1V, V <sub>DD</sub> =4.5V	1.0	2.0	mA	
t <sub>PLH</sub>	Output Delay Time				100	μs	Note 2
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T <sub>opt</sub> ≤80°C		±100		ppm/°C	

## • R×5VT18A/C

T<sub>opt</sub>=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit	Note
-V <sub>DET</sub>	Detector Threshold		1.755	1.800	1.845	V	
V <sub>HYS</sub>	Detector Threshold Hysteresis		0.054	0.090	0.126	V	
I <sub>SS</sub>	Supply Current	V <sub>DD</sub> =1.70V		0.8	2.4	μA	
		V <sub>DD</sub> =3.80V		1.0	3.0		
V <sub>DDH</sub>	Maximum Operating Voltage				10	V	
V <sub>DDL</sub>	Minimum Operating Voltage	T <sub>opt</sub> =25°C		0.55	0.70	V	Note 1
		-30°C≤T <sub>opt</sub> ≤80°C		0.65	0.80		
I <sub>OUT</sub>	Output Current	Nch	V <sub>DS</sub> =0.05V, V <sub>DD</sub> =0.70V	0.01	0.05	mA	
			V <sub>DS</sub> =0.50V, V <sub>DD</sub> =1.50V	1.00	2.00		
		Pch	V <sub>DS</sub> =-2.1V, V <sub>DD</sub> =4.5V	1.0	2.0	mA	
t <sub>PLH</sub>	Output Delay Time				100	μs	Note 2
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T <sub>opt</sub> ≤80°C		±100		ppm/°C	

7744690 0003868 49T

RICOH

**R×5VT**

**•R×5VT27A/C**

T<sub>opt</sub>=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit	Note
-V <sub>DET</sub>	Detector Threshold		2.633	2.700	2.767	V	
V <sub>HYS</sub>	Detector Threshold Hysteresis		0.081	0.135	0.189	V	
I <sub>SS</sub>	Supply Current	V <sub>DD</sub> =2.60V		0.9	2.7	μA	
		V <sub>DD</sub> =4.70V		1.1	3.3		
V <sub>DDH</sub>	Maximum Operating Voltage				10	V	
V <sub>DDL</sub>	Minimum Operating Voltage	T <sub>opt</sub> =25°C		0.55	0.70	V	Note 1
		-30°C≤T <sub>opt</sub> ≤80°C		0.65	0.80		
I <sub>OUT</sub>	Output Current	Nch	V <sub>DS</sub> =0.05V, V <sub>DD</sub> =0.70V	0.01	0.05	mA	
			V <sub>DS</sub> =0.50V, V <sub>DD</sub> =1.50V	1.00	2.00		
		Pch	V <sub>DS</sub> =-2.1V, V <sub>DD</sub> =4.5V	1.0	2.0	mA	
t <sub>PLH</sub>	Output Delay Time				100	μs	Note 2
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T <sub>opt</sub> ≤80°C		±100		ppm/°C	

**•R×5VT36A/C**

T<sub>opt</sub>=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit	Note
-V <sub>DET</sub>	Detector Threshold		3.510	3.600	3.690	V	
V <sub>HYS</sub>	Detector Threshold Hysteresis		0.108	0.180	0.252	V	
I <sub>SS</sub>	Supply Current	V <sub>DD</sub> =3.47V		1.0	3.0	μA	
		V <sub>DD</sub> =5.60V		1.2	3.6		
V <sub>DDH</sub>	Maximum Operating Voltage				10	V	
V <sub>DDL</sub>	Minimum Operating Voltage	T <sub>opt</sub> =25°C		0.55	0.70	V	Note 1
		-30°C≤T <sub>opt</sub> ≤80°C		0.65	0.80		
I <sub>OUT</sub>	Output Current	Nch	V <sub>DS</sub> =0.05V, V <sub>DD</sub> =0.70V	0.01	0.05	mA	
			V <sub>DS</sub> =0.50V, V <sub>DD</sub> =1.50V	1.00	2.00		
		Pch	V <sub>DS</sub> =-2.1V, V <sub>DD</sub> =4.5V	1.0	2.0	mA	
t <sub>PLH</sub>	Output Delay Time				100	μs	Note 2
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T <sub>opt</sub> ≤80°C		±100		ppm/°C	

7744690 0003869 326

**RICOH**



## • R×5VT45A/C

T<sub>opt</sub>=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit	Note
-V <sub>DET</sub>	Detector Threshold		4.388	4.500	4.612	V	
V <sub>HYS</sub>	Detector Threshold Hysteresis		0.135	0.225	0.315	V	
I <sub>SS</sub>	Supply Current	V <sub>DD</sub> =4.34V		1.1	3.3	μA	
		V <sub>DD</sub> =6.50V		1.3	3.9		
V <sub>DDH</sub>	Maximum Operating Voltage				10	V	
V <sub>DDL</sub>	Minimum Operating Voltage	T <sub>opt</sub> =25°C		0.55	0.70	V	Note 1
		-30°C≤T <sub>opt</sub> ≤80°C		0.65	0.80		
I <sub>OUT</sub>	Output Current	Nch	V <sub>DS</sub> =0.05V, V <sub>DD</sub> =0.70V	0.01	0.05	mA	
			V <sub>DS</sub> =0.50V, V <sub>DD</sub> =1.50V	1.00	2.00		
		Pch	V <sub>DS</sub> =-2.1V, V <sub>DD</sub> =8.0V	1.5	3.0	mA	
t <sub>PLH</sub>	Output Delay Time				100	μs	Note 2
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T <sub>opt</sub> ≤80°C		±100		ppm/°C	

## • R×5VT54A/C

T<sub>opt</sub>=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit	Note
-V <sub>DET</sub>	Detector Threshold		5.265	5.400	5.535	V	
V <sub>HYS</sub>	Detector Threshold Hysteresis		0.162	0.270	0.378	V	
I <sub>SS</sub>	Supply Current	V <sub>DD</sub> =5.20V		1.2	3.6	μA	
		V <sub>DD</sub> =7.40V		1.4	4.2		
V <sub>DDH</sub>	Maximum Operating Voltage				10	V	
V <sub>DDL</sub>	Minimum Operating Voltage	T <sub>opt</sub> =25°C		0.55	0.70	V	Note 1
		-30°C≤T <sub>opt</sub> ≤80°C		0.65	0.80		
I <sub>OUT</sub>	Output Current	Nch	V <sub>DS</sub> =0.05V, V <sub>DD</sub> =0.70V	0.01	0.05	mA	
			V <sub>DS</sub> =0.50V, V <sub>DD</sub> =1.50V	1.00	2.00		
		Pch	V <sub>DS</sub> =-2.1V, V <sub>DD</sub> =8.0V	1.5	3.0	mA	
t <sub>PLH</sub>	Output Delay Time				100	μs	Note 2
$\frac{\Delta-V_{DET}}{\Delta T_{opt}}$	Detector Threshold Temperature Coefficient	-30°C≤T <sub>opt</sub> ≤80°C		±100		ppm/°C	

(Note 1) Minimum Operating Voltage means the value of input voltage when output voltage maintains 0.1V or less, provided that in the case of Nch Open Drain Type Products, the pull-up resistance is set at 470kΩ, and the pull-up voltage is set at 5.0V.

(Note 2) Refer to the previously defined "Output Delay Time t<sub>PLH</sub>".

7744690 0003870 048

RICOH

## ELECTRICAL CHARACTERISTICS BY DETECTOR THRESHOLD

• RX5VT09A/C to RX5VT39A/C

Part Number	Detector Threshold			Detector Threshold Hysteresis			Supply Current 1			Supply Current 2				
	-VDET(V)			Vhrs(V)			Iss(μA)			Iss(μA)				
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	Conditions	TYP.	MAX.	Conditions	TYP.	MAX.		
RX5VT09A/C	0.878	0.900	0.922	0.027	0.045	0.063	VDD= (-VDET) -0.10V	0.8	2.4	VDD= (-VDET) +2.0V	0.9	2.7		
RX5VT10A/C	0.975	1.000	1.025	0.030	0.050	0.070					0.9	2.7	1.1	3.3
RX5VT11A/C	1.073	1.100	1.127	0.033	0.055	0.077								
RX5VT12A/C	1.170	1.200	1.230	0.036	0.060	0.084								
RX5VT13A/C	1.268	1.300	1.332	0.039	0.065	0.091								
RX5VT14A/C	1.365	1.400	1.435	0.042	0.070	0.098								
RX5VT15A/C	1.463	1.500	1.537	0.045	0.075	0.105								
RX5VT16A/C	1.560	1.600	1.640	0.048	0.080	0.112								
RX5VT17A/C	1.658	1.700	1.742	0.051	0.085	0.119								
RX5VT18A/C	1.755	1.800	1.845	0.054	0.090	0.126								
RX5VT19A/C	1.853	1.900	1.947	0.057	0.095	0.133	VDD= (-VDET) -0.13V	1.0	3.0	1.2				
RX5VT20A/C	1.950	2.000	2.050	0.060	0.100	0.140								
RX5VT21A/C	2.048	2.100	2.152	0.063	0.105	0.147								
RX5VT22A/C	2.145	2.200	2.255	0.066	0.110	0.154								
RX5VT23A/C	2.243	2.300	2.357	0.069	0.115	0.161								
RX5VT24A/C	2.340	2.400	2.460	0.072	0.120	0.168								
RX5VT25A/C	2.438	2.500	2.562	0.075	0.125	0.175								
RX5VT26A/C	2.535	2.600	2.665	0.078	0.130	0.182								
RX5VT27A/C	2.633	2.700	2.767	0.081	0.135	0.189								
RX5VT28A/C	2.730	2.800	2.870	0.084	0.140	0.196								
RX5VT29A/C	2.828	2.900	2.972	0.087	0.145	0.203								
RX5VT30A/C	2.925	3.000	3.075	0.090	0.150	0.210								
RX5VT31A/C	3.023	3.100	3.177	0.093	0.155	0.217								
RX5VT32A/C	3.120	3.200	3.280	0.096	0.160	0.224								
RX5VT33A/C	3.218	3.300	3.382	0.099	0.165	0.231								
RX5VT34A/C	3.315	3.400	3.485	0.102	0.170	0.238								
RX5VT35A/C	3.413	3.500	3.587	0.105	0.175	0.245								
RX5VT36A/C	3.510	3.600	3.690	0.108	0.180	0.252								
RX5VT37A/C	3.608	3.700	3.792	0.111	0.185	0.259								
RX5VT38A/C	3.705	3.800	3.895	0.114	0.190	0.266								
RX5VT39A/C	3.803	3.900	3.997	0.117	0.195	0.273								

(Note 1) Refer to the previously defined "Output Delay Time t<sub>PH</sub>".

(Note 2) Refer to the previously defined "Minimum Operating Voltage".

Condition 1: T<sub>opt</sub> = 25°C

Condition 2: -30°C ≤ T<sub>opt</sub> ≤ 80°C

7744690 0003871 T84

**RICOH**

T<sub>opt</sub>=25°C

Output Current 1			Output Current 2			Output Current 3			Output Delay Time	Minimum Operating Voltage		Detector Threshold Tempco.	
I <sub>out</sub> (mA)			I <sub>out</sub> (mA)			I <sub>out</sub> (mA)			t <sub>PLH</sub> (μs)	V <sub>DDL</sub> (V)		Δ-V <sub>DET</sub> /ΔT <sub>opt</sub> (ppm/°C)	
Conditions	MIN.	TYP.	Conditions	MIN.	TYP.	Conditions	MIN.	TYP.	MAX.	TYP.	MAX.	Conditions	TYP.
Nch	0.01	0.05	V <sub>DD</sub> = 0.85V	0.05	0.50	Pch	1.0	2.0	Note 1 100	Note 2	Note 2	-30°C ≤ T <sub>opt</sub> ≤ 80°C	±100
			V <sub>DD</sub> = 1.0V	0.2	1.0								
			V <sub>DS</sub> = 0.50V	V <sub>DD</sub> = 1.5V	1.0								
V <sub>DS</sub> = 0.05V	V <sub>DD</sub> = 0.7V	V <sub>DS</sub> = 0.50V	V <sub>DD</sub> = 1.5V	1.0	2.0	V <sub>DS</sub> = -2.1V	V <sub>DD</sub> = 4.5V	Note 1 100	Note 2	Note 2	-30°C ≤ T <sub>opt</sub> ≤ 80°C	±100	

7744690 0003872 910

**RICOH**

• R×5VT40A/C to R×5VT60A/C

Part Number	Detector Threshold			Detector Threshold Hysteresis			Supply Current 1			Supply Current 2		
	-VDET(V)			Vhys(V)			Iss(μA)			Iss(μA)		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	Conditions	TYP.	MAX.	Conditions	TYP.	MAX.
R×5VT40A/C	3.900	4.000	4.100	0.120	0.200	0.280	VDD= (-VDET) -0.16V	1.1	3.3	VDD= (-VDET) +2.0V	1.3	3.9
R×5VT41A/C	3.998	4.100	4.202	0.123	0.205	0.287						
R×5VT42A/C	4.095	4.200	4.305	0.126	0.210	0.294						
R×5VT43A/C	4.193	4.300	4.407	0.129	0.215	0.301						
R×5VT44A/C	4.290	4.400	4.510	0.132	0.220	0.308						
R×5VT45A/C	4.388	4.500	4.612	0.135	0.225	0.315						
R×5VT46A/C	4.485	4.600	4.715	0.138	0.230	0.322						
R×5VT47A/C	4.583	4.700	4.817	0.141	0.235	0.329						
R×5VT48A/C	4.680	4.800	4.920	0.144	0.240	0.336						
R×5VT49A/C	4.778	4.900	5.022	0.147	0.245	0.343						
R×5VT50A/C	4.875	5.000	5.125	0.150	0.250	0.350	VDD= (-VDET) -0.20V	1.2	3.6	1.4	4.2	
R×5VT51A/C	4.973	5.100	5.277	0.153	0.255	0.357						
R×5VT52A/C	5.070	5.200	5.330	0.156	0.260	0.364						
R×5VT53A/C	5.168	5.300	5.432	0.159	0.265	0.371						
R×5VT54A/C	5.265	5.400	5.535	0.162	0.270	0.378						
R×5VT55A/C	5.363	5.500	5.637	0.165	0.275	0.385						
R×5VT56A/C	5.460	5.600	5.740	0.168	0.280	0.392						
R×5VT57A/C	5.558	5.700	5.842	0.171	0.285	0.399						
R×5VT58A/C	5.655	5.800	5.945	0.174	0.290	0.406						
R×5VT59A/C	5.753	5.900	6.047	0.177	0.295	0.413						
R×5VT60A/C	5.850	6.000	6.150	0.180	0.300	0.420						

(Note 1) Refer to the previously defined "Output Delay Time tPLH".

(Note 2) Refer to the previously defined "Minimum Operating Voltage".

Condition 1: T<sub>opt</sub> = 25°C

Condition 2: -30°C ≤ T<sub>opt</sub> ≤ 80°C

7744690 0003873 857

**RICOH**

T<sub>opt</sub>=25°C

Output Current 1			Output Current 2			Output Current 3			Output Delay Time	Minimum Operating Voltage		Detector Threshold Tempco.		
I <sub>out</sub> (mA)			I <sub>out</sub> (mA)			I <sub>out</sub> (mA)			t <sub>PLH</sub> (μs)	V <sub>DDL</sub> (V)		Δ-V <sub>DET</sub> /ΔT <sub>opt</sub> (ppm/°C)		
Conditions	MIN.	TYP.	Conditions	MIN.	TYP.	Conditions	MIN.	TYP.	MAX.	TYP.	MAX.	Conditions	TYP.	
Nch						Pch				Note 2	Note 2			
V <sub>DS</sub> = 0.05V	0.01	0.05	V <sub>DS</sub> = 0.50V	V <sub>DD</sub> = 1.5V	1.0	2.0	V <sub>DS</sub> = -2.1V	1.5	3.0	Note 1 100	Condition 1 0.55	Condition 1 0.70	-30°C ≤ T <sub>opt</sub> ≤ 80°C	±100
V <sub>DD</sub> = 0.7V							V <sub>DD</sub> = 8.0V				Condition 2 0.65	Condition 2 0.80		

7744690 0003874 793

**RICOH**

# OPERATION

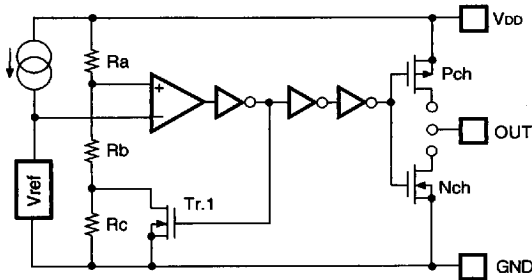


FIG. 1 Block Diagram

- In RX5VT××A, Nch Tr. drain is connected to OUT pin.
- In RX5VT××C, Nch Tr. drain and Pch Tr. drain are connected to OUT pin.

## Operation Diagram

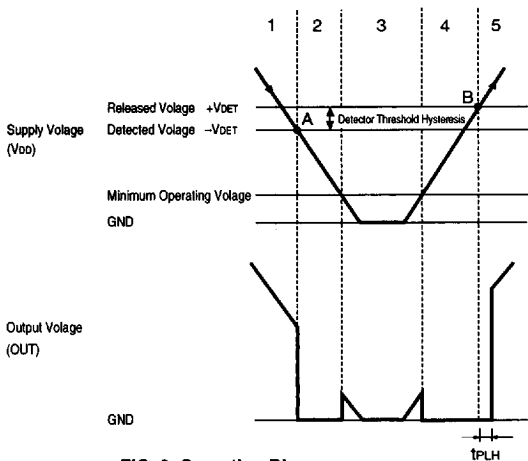


FIG. 2 Operation Diagram

Step	Step 1	Step 2	Step 3	Step 4	Step 5
Comparator(+) Pin Input Voltage	I	II	II	II	I
Comparator Output	H	L	Indefinite	L	H
Tr. 1	OFF	ON	Indefinite	ON	OFF
Output Tr.	Pch	ON	OFF	Indefinite	OFF
	Nch	OFF	ON	Indefinite	ON

$$I. \frac{R_b + R_c}{R_a + R_b + R_c} \cdot V_{DD}$$

$$II. \frac{R_b}{R_a + R_b} \cdot V_{DD}$$

- Step 1. Output Voltage is equal to Power Source Voltage ( $V_{DD}$ ).
- Step 2. When Input Voltage to Comparator reaches the state of  $V_{ref} \geq V_{DD} \cdot (R_b + R_c) / (R_a + R_b + R_c)$  at Point A (Detected Voltage  $-V_{DET}$ ), the output of Comparator is reserved, so that Output Voltage becomes GND.
- Step 3. In the case of CMOS Output, Output Voltage becomes unstable when Supply Voltage ( $V_{DD}$ ) is smaller than Minimum Operating Voltage. In the case of Nch Open Drain Output, a pulled-up voltage is output.
- Step 4. Output Voltage becomes equal to GND.
- Step 5. When Input Voltage to Comparator reaches the state of  $V_{ref} \leq V_{DD} \cdot (R_b) / (R_a + R_b)$  at Point B (Released Voltage  $+V_{DET}$ ), the output of Comparator is reversed, so that Output Voltage becomes equal to Supply Voltage ( $V_{DD}$ ).

7744690 0003875 62T

**RICOH**

# TEST CIRCUITS




FIG. 3 Supply Current Test Circuit

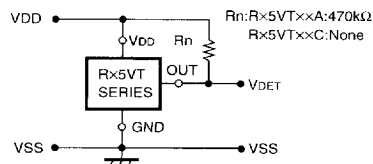


FIG. 4 Detector Threshold Test Circuit




FIG. 5 Nch Driver Output Current Test Circuit




FIG. 6 Pch Driver Output Current Test Circuit

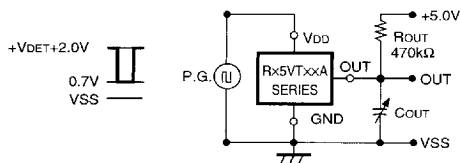


FIG. 7 Output Delay Time Test Circuit (1)



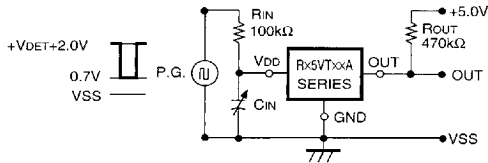


FIG. 8 Output Delay Time Test Circuit (2)

In Output Delay Time Test Circuits (1) and (2) in FIG. 7 and FIG. 8, their respective Output Voltage Fall Times (tPHL) and Rise Times (tPLH) are defined as shown below.

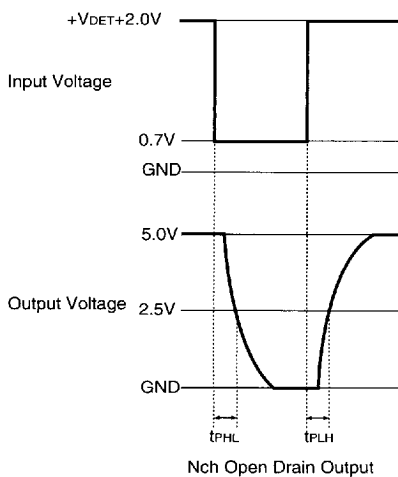

Nch Open Drain Output

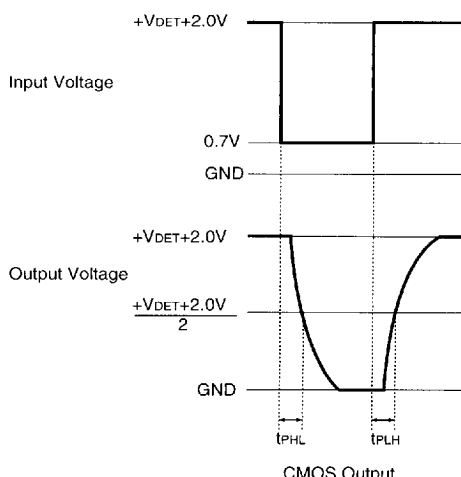




CMOS Output

7744690 0003876 566



RIGOH

# TYPICAL CHARACTERISTICS

## 1) Supply Current vs. Input Voltage

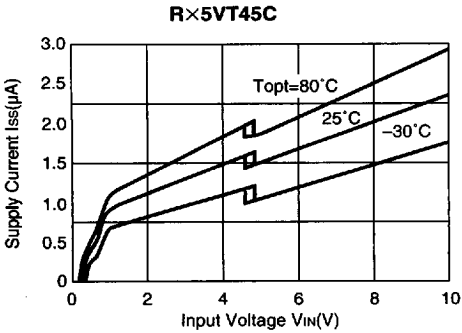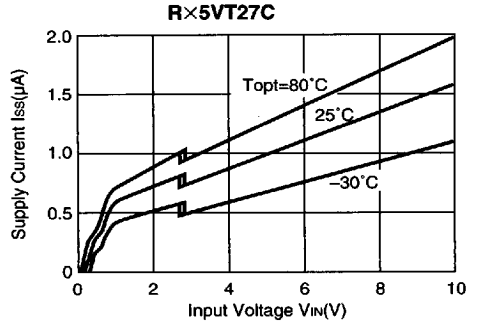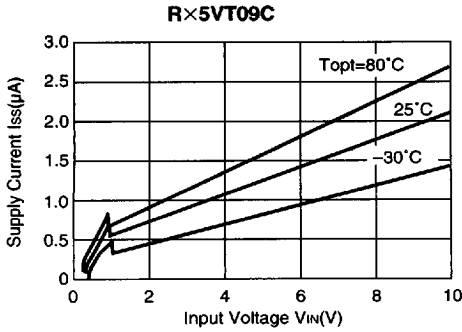


## 2) Detector Threshold vs. Temperature

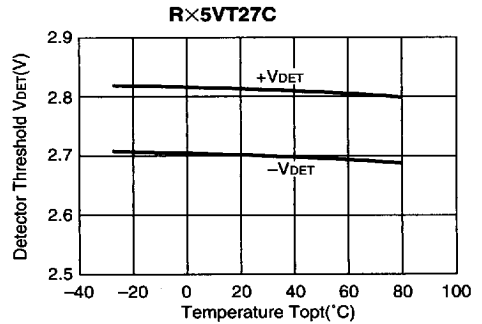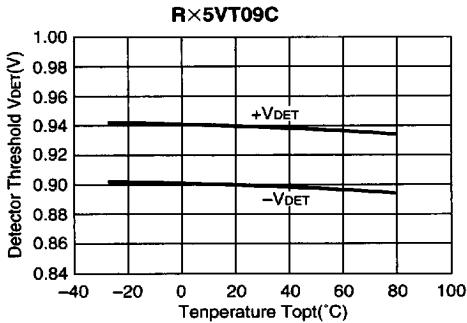





7744690 0003877 4T2

**RICOH**




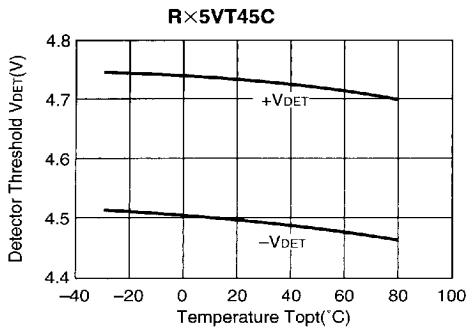


**3) Output Voltage vs. Input Voltage**

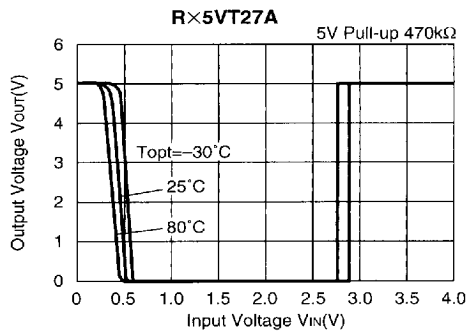
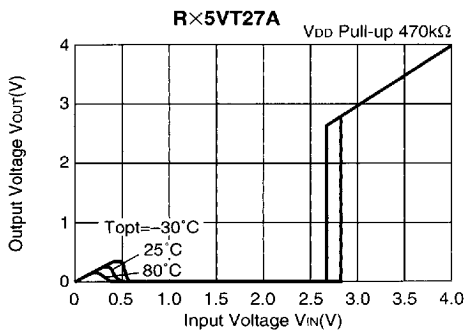
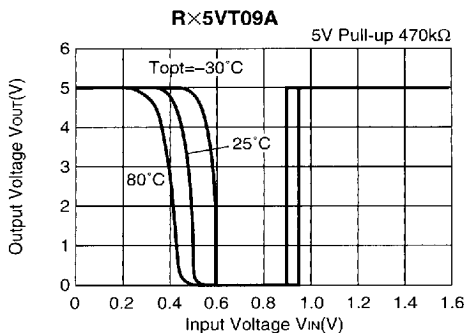
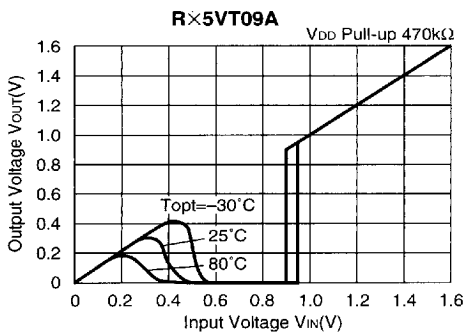


7744690 0003878 339

**RICOH**

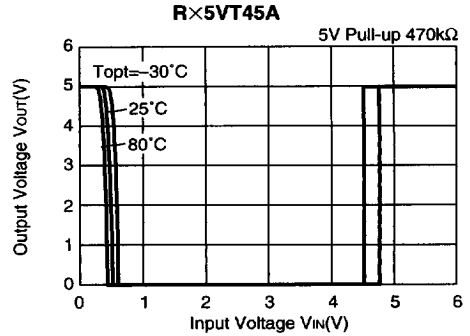
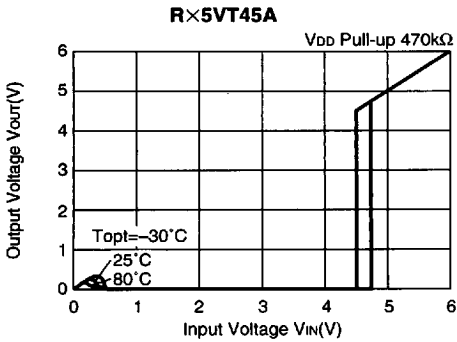


4) Nch Driver Output Current vs. V<sub>ds</sub>

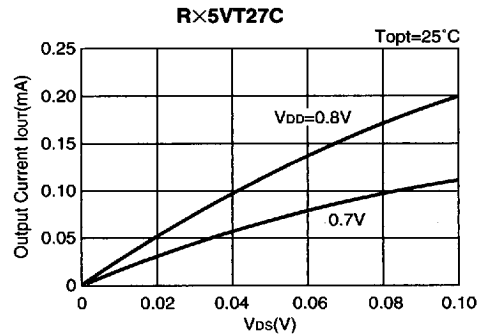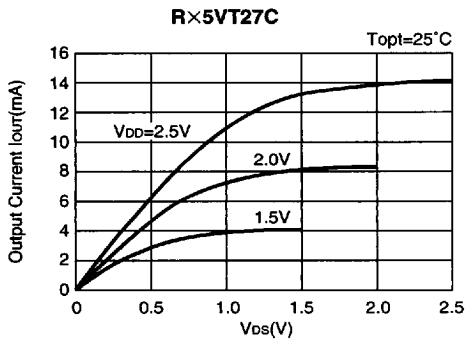
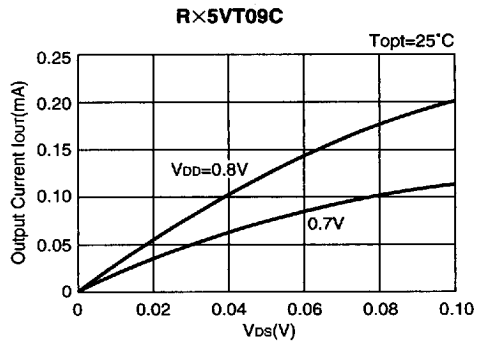
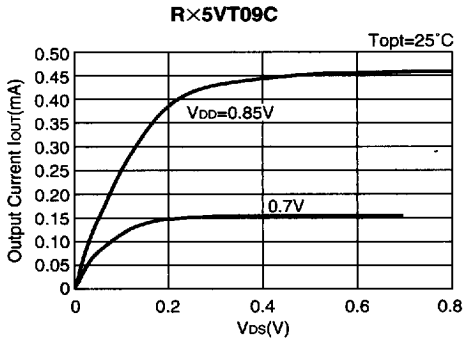


7744690 0003879 275

**RICOH**

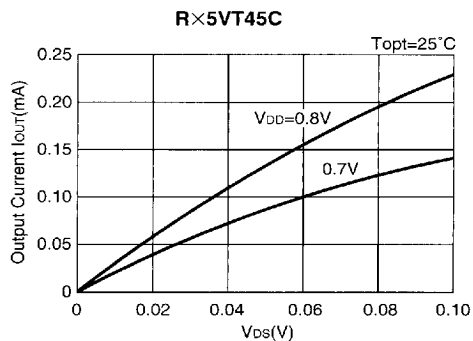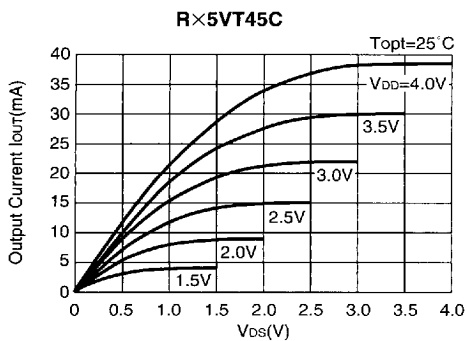




5) Nch Driver Output Current vs. Input Voltage

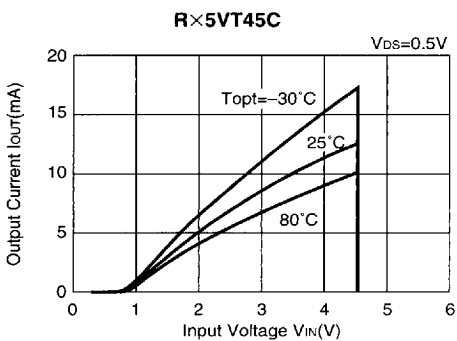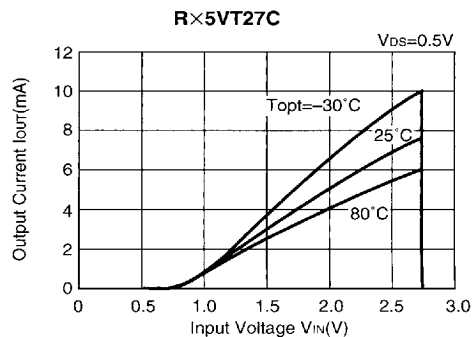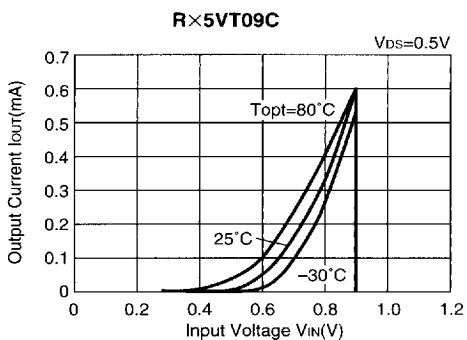



7744690 0003880 T97

**RICOH**

6) Pch Driver Output Current vs. Input Voltage

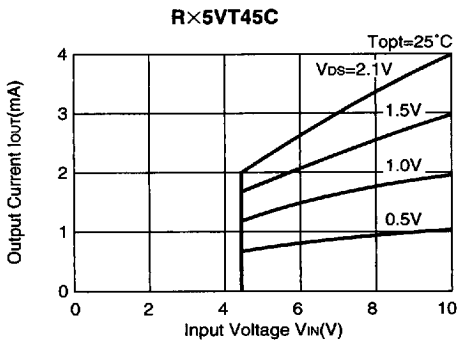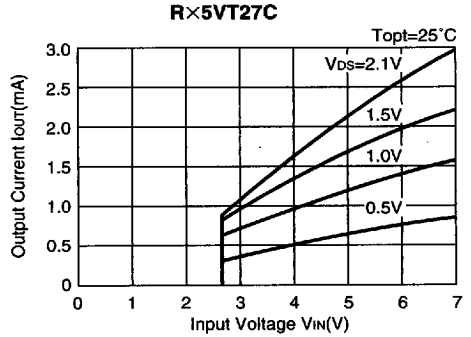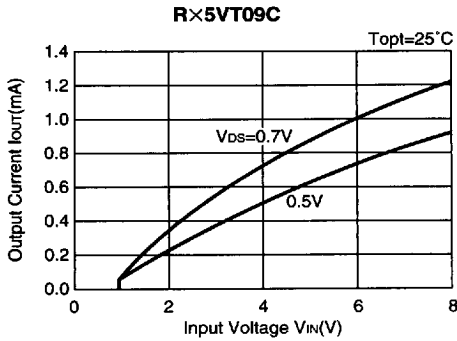


7) Output Delay Time vs. Load Capacitance

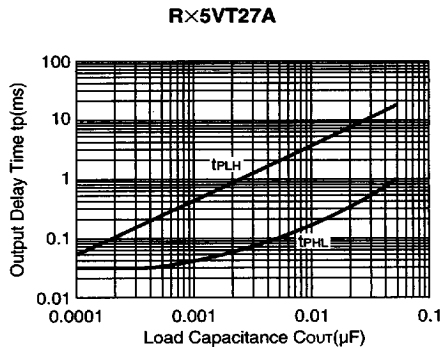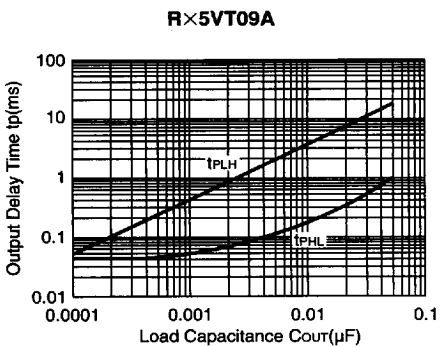

7744690 0003881 923


**RICOH**

R×5VT45A

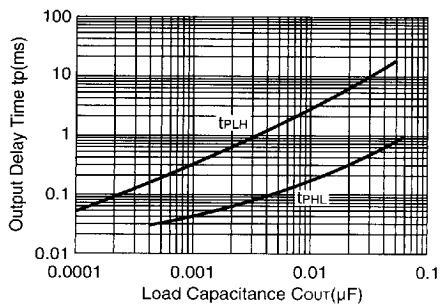


8) Output Delay Time vs. Input Pin Capacitance


R×5VT09A

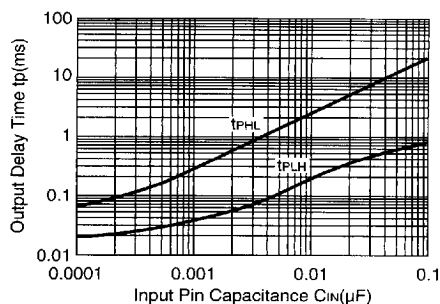

R×5VT27A

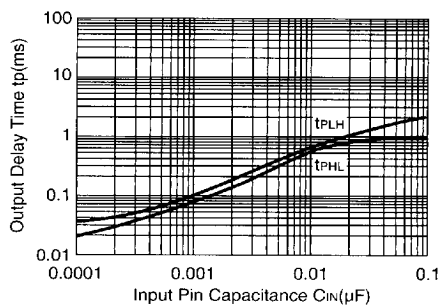

R×5VT45A

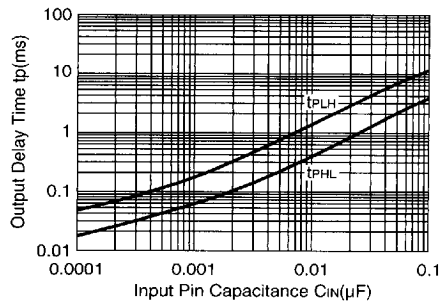


7744690 0003882 86T

RICOH


## TYPICAL APPLICATIONS

### • R×5VT××A CPU Reset Circuit (Nch Open Drain Output)


(1) Input Voltage to R×5VT××A is the same as the input voltage to CPU.




(2) Input Voltage to R×5VT××A is different from the input voltage to CPU.

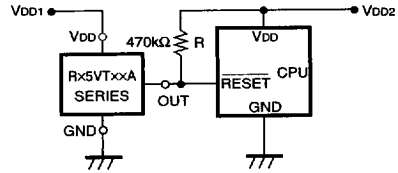


### • R×5VT××C CPU Reset Circuit (CMOS Output)




### • R×5VT××A Output delay Time Circuit 1



### • R×5VT××A Output delay Time Circuit 2

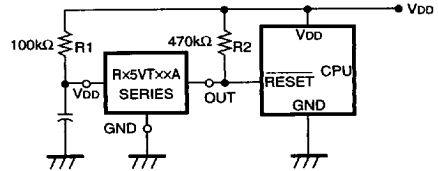

### • Memory Back-up Circuit

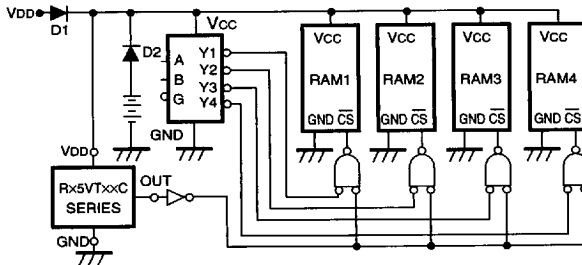


7744690 0003883 7T6

RICOH


• Voltage Level Indicator Circuit (lighted when the power runs out)

(Nch Open Drain Output)



• Detector Threshold Changing Circuit

(Nch Open Drain Output)





$$\text{Changed Detector Threshold} = \frac{Ra + Rb}{Rb} \cdot (-V_{DET})$$

$$\text{Hysteresis Voltage} = \frac{Ra + Rb}{Rb} \cdot V_{HYS}$$


(Note) Please note that when the value of Ra becomes excessively large, the detector threshold detected may differ from the value calculated by use of the above formula.

• Window Comparator Circuit

(Nch Open Drain Output)

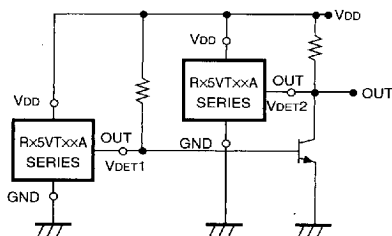

• Excessive Charge Preventing Circuit

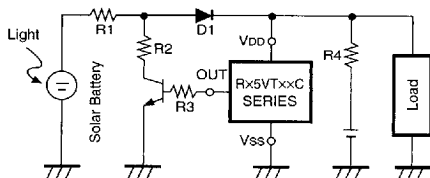

7744690 0003884 632

RICOH

## APPLICATION HINTS




FIG. 9




FIG. 10

1. When R×5VT××C (CMOS Output) is used in FIG. 9, this IC may oscillate by the through-type current at the detection when impedance is connected between Power Source VDD and R×5VT VDD Pin. When R×5VT××A (Nch Open Drain Output) is used in FIG. 9, and R becomes excessively large, Detector Threshold may be varied because of the voltage drop of the supply current in the IC itself.
2. The connection as shown in FIG. 10 may cause the oscillation in both R×5VT××C (CMOS Output) and R×5VT××A (Nch Open Drain Output).

7744690 0003885 579

RICOH