

SYNCHRO/RESOLVER/INDUCTOSYN® REFERENCE OSCILLATOR

DESCRIPTION

The OSC-15801 is a quadrature power oscillator with two outputs that are 90° out of phase. These outputs provide both the reference and quadrature signals, simultaneously, making the OSC-15801 ideally suited for Inductosyn applications.

The oscillator's outputs are pin-programmable for both frequency and amplitude. The output frequency can be programmed from 400 Hz to 20 kHz by simply connecting two external capacitors. The Reference output voltage, 8.8 Vrms at 20 kHz, can be

scaled down by connecting a single resistor.

APPLICATIONS

Packaged in an 18-pin hermetic DDIP, the OSC-15801 operates over a temperature range of -55°C to +125°C. This, combined with its small size and programmable output voltage and frequency capabilities, makes it an excellent choice for use in Inductosyn applications.

FEATURES

- **Quadrature Reference Output Voltages for Inductosyn Applications**
- **Programmable Output Frequency from 400 Hz to 20 kHz**
- **Small 18-Pin DDIP**
- **Scalable Reference Output**
- **-55°C to +125°C Operating Temperature Range**

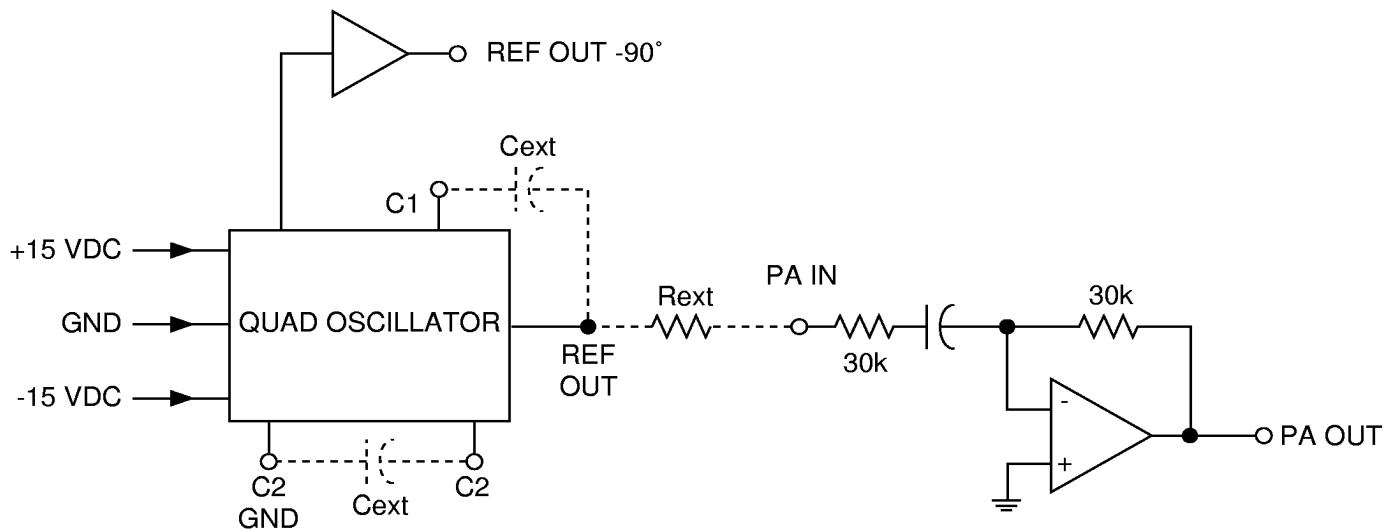


FIGURE 1. OSC-15801 BLOCK DIAGRAM

| TABLE 1. OSC-15801 SPECIFICATIONS | | |
|---|---------|---|
| Specifications apply over temperature range and power supply range. | | |
| PARAMETER | UNITS | VALUE |
| FREQUENCY | Hz | Programmable from 400 to 20k |
| OUTPUTS (Note 1) | | |
| PA OUT | | |
| Voltage | V rms | 7.1 to 8.8 |
| Current | mA rms | 215 min |
| REF | | |
| Voltage | V rms | 7.1 to 8.8 |
| Current | mA rms | 3 min |
| REF -90° | | |
| Voltage | V rms | (Note 2) |
| Current | mA rms | 3 min |
| Protection | | Momentary short circuit and transient proof (1 sec. max.) |
| POWER SUPPLIES | | |
| Voltage | Vdc | ±15 ±5% |
| Current | mA | 10 max plus current load |
| Max Voltage without damage | Vdc | ±18 |
| TEMPERATURE RANGE | | |
| Operating | | |
| -10X | °C | -55 to +125 |
| -30X | °C | 0 to +70 |
| Storage | °C | -65 to +150 |
| PHYSICAL CHARACTERISTICS | | |
| Size | in (mm) | 1.0 x 0.8 x 0.2 (25.45 x 20.32 x 4.83) |
| Package Type | | 18-pin DDIP |
| Weight | oz (gm) | 0.4 (1) |

Notes:
1. Output voltage tracks ±15 V supply levels.
2. Clipped sine wave for demodulator drive only, 10 Vrms typ.

OSC-15801 OPERATION

PROGRAMMABLE FREQUENCY OUTPUT

The output frequency of the OSC-15801 is programmable from 20 kHz down to 400 Hz. The frequency is programmed using two external equal value capacitors (see FIGURE 2). The value of the capacitors (C_{ext}) is calculated as follows:

$$C_{ext} = (2,400,000/f) - 100$$

where: C_{ext} is capacitance in picofarads,
f is frequency in Hertz.

PROGRAMMABLE REFERENCE VOLTAGE OUTPUT

The PA OUT (REF), pin 13, provides from 7.1 to 8.8 Vrms, depending on the operating frequency. TABLE 2 lists the PA OUT voltages at the (programmed) operating frequency. These voltages are the maximum voltages obtained at these frequencies, with the R_{ext} = 0 Ohms (pin 7 jumped to pin 3).

| TABLE 2. PA OUT/FREQUENCY | |
|---------------------------|-----------|
| PA OUT | FREQUENCY |
| 8.8 Vrms | 20 kHz |
| 7.5 Vrms | 10 kHz |
| 7.1 Vrms | .4 kHz |

To scale down the PA OUT voltage, an external resistor (R_{ext}) is connected between pins 3 and 7. The value of R_{ext} is calculated as follows:

$$R_{ext} = 30 [(PA\ OUT/desired\ voltage) - 1]$$


where: R_{ext} is in kOhms,
desired voltage is in Vrms,
PA OUT is dependent on frequency used.

FOR EXAMPLE, to scale down PA OUT to 5 Vrms at 10 kHz, the value of R_{ext} would be calculated as follows:

$$R_{ext} = 30 [(PA\ OUT/desired\ voltage) - 1]$$

$$R_{ext} = 30 [(7.5/5) - 1]$$

$$R_{ext} = 15k\Omega$$

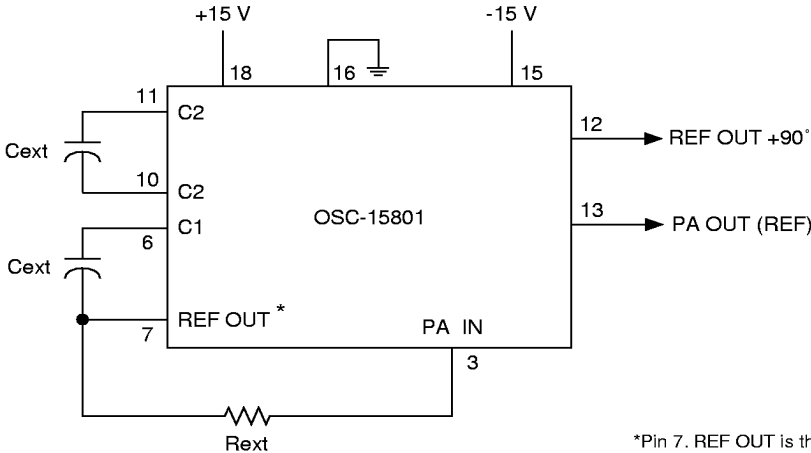

*Pin 7. REF OUT is the unbuffered output of oscillator

FIGURE 2. PROGRAMMING RESISTOR AND CAPACITOR CONNECTIONS

| TABLE 3. OSC-15801 PIN FUNCTIONS | | |
|----------------------------------|--------------|---|
| PIN | NAME | FUNCTION |
| 1 | NC | No connection |
| 2 | NC | No connection |
| 3 | PA IN | Power amplifier inverting input |
| 4 | NC | No connection |
| 5 | NC | No connection |
| 6 | C1 | Capacitor connection (pin-programmable freq.) |
| 7 | REF OUT | Reference output |
| 8 | NC | No connection |
| 9 | NC | No connection |
| 10 | C2 | Capacitor connection (pin-programmable freq.) |
| 11 | C2 GND | Capacitor connection (pin-programmable freq.) |
| 12 | REF OUT -90° | -90° reference output signal |
| 13 | PA OUT | Power amplifier output |
| 14 | NC | No connection |
| 15 | -15 V | -15 Vdc power supply voltage |
| 16 | GND | Ground |
| 17 | NC | No connection |
| 18 | +15 V | +15 Vdc power supply voltage |

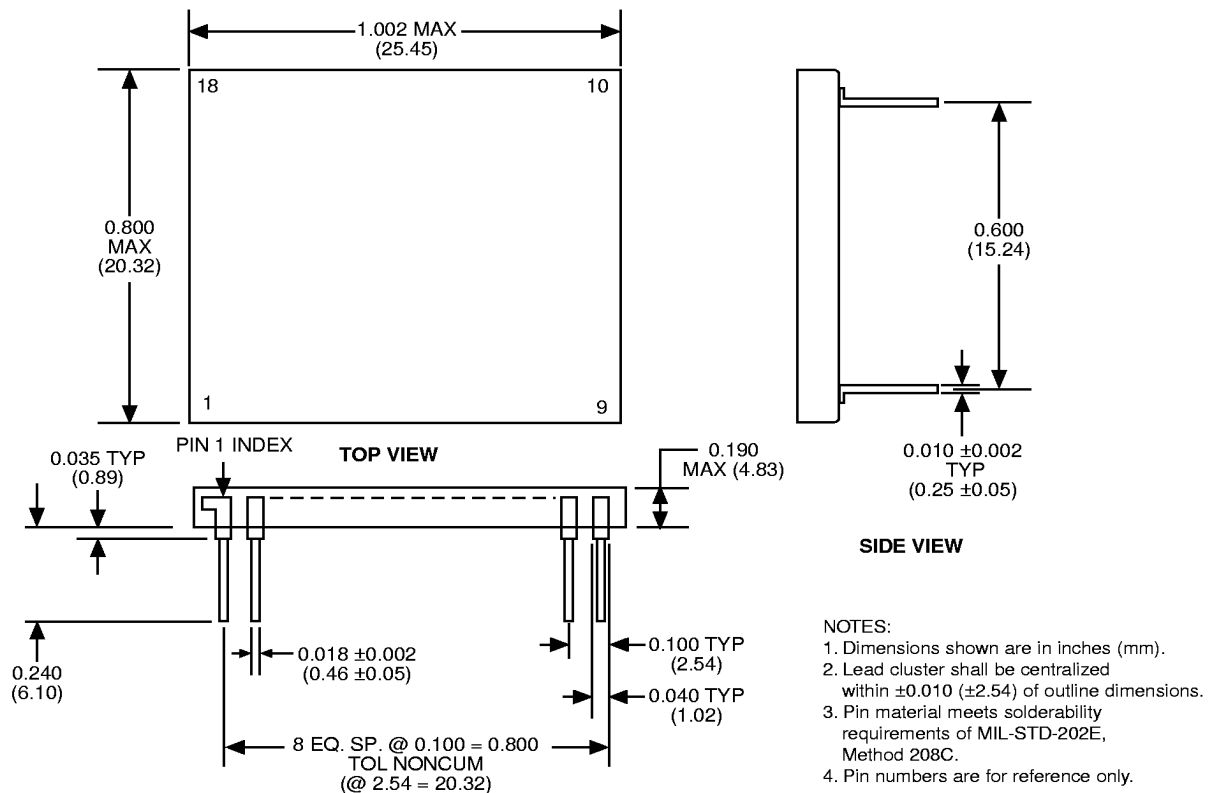


FIGURE 3. OSC-15801 MECHANICAL OUTLINE

ORDERING INFORMATION

OSC-15801-X X 0 X

Supplemental Process Requirements:

S = Pre-Cap Source Inspection
L = Pull Test
Q = Pull Test and Pre-Cap Inspection
K = One Lot Date Code
W = One Lot Date Code and PreCap Source
Y = One Lot Date Code and 100% Pull Test
Z = One Lot Date Code, PreCap Source and 100% Pull Test
Blank = None of the Above

Process Requirements:

0 = Standard DDC Processing, no Burn-In
1 = MIL-PRF-38534 Compliant
2 = B*
3 = MIL-PRF-38534 Compliant with PIND Testing
4 = MIL-PRF-38534 Compliant with Solder Dip
5 = MIL-PRF-38534 Compliant with PIND Testing and Solder Dip
6 = B* with PIND Testing
7 = B* with Solder Dip
8 = B* with PIND Testing and Solder Dip
9 = Standard DDC Processing with Solder Dip, no Burn-In

Temperature Grade/Data Requirements:

1 = -55°C to +125°C
2 = -40°C to +85°C
3 = 0°C to +70°C
4 = -55°C to +125°C with Variables Test Data
5 = -40°C to +85°C with Variables Test Data
8 = 0°C to +70°C with Variables Test Data

*Standard DDC Processing with burn-in and full temperature test - see table below

| STANDARD DDC PROCESSING | | |
|-------------------------|----------------------------|--------------|
| TEST | MIL-STD-883 | |
| | METHOD(S) | CONDITION(S) |
| INSPECTION | 2009, 2010, 2017, and 2032 | — |
| SEAL | 1014 | A and C |
| TEMPERATURE CYCLE | 1010 | C |
| CONSTANT ACCELERATION | 2001 | A |
| BURN-IN | 1015, Table 1 | — |



ILC DATA DEVICE CORPORATION®

105 Wilbur Place, Bohemia, New York 11716-2482

For Technical Support - 1-800-DDC-5757 ext. 7389 or 7413

Headquarters - Tel: (516) 567-5600 ext. 7389 or 7413, Fax: (516) 567-7358

Northern New Jersey - Tel: (908) 687-0441, Fax: (908) 687-0470

Southeast - Tel: (703) 450-7900, Fax: (703) 450-6610

West Coast - Tel: (714) 895-9777, Fax: (714) 895-4988

Europe - Tel: +44-(0)1635-811140, Fax: +44-(0)1635-32264

Asia/Pacific - Tel: +81-(0)3-3814-7688, Fax: +81-(0)3-3814-7689

World Wide Web - <http://www.ilcddc.com>

The information in this data sheet is believed to be accurate; however, no responsibility is assumed by ILC Data Device Corporation for its use, and no license or rights are granted by implication or otherwise in connection therewith.

Specifications are subject to change without notice.



ILC DATA DEVICE CORPORATION
REGISTERED TO ISO 9001
FILE NO. A3976

PRINTED IN THE U.S.A.

G-11/98-500