

# KR Electronics

## General Description


KR 2825 is a 196 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 40 MHz. Other passband frequencies are available. Please consult the factory.

### Features


- 196 MHz Center Frequency
- 40 MHz Bandwidth
- SMA Connectors
- Also available in surface mount
- 50  $\Omega$  Source and Load

## Typical Performance

### Passband Amplitude & Group Delay (1 dB/div and 10 nsec/div)

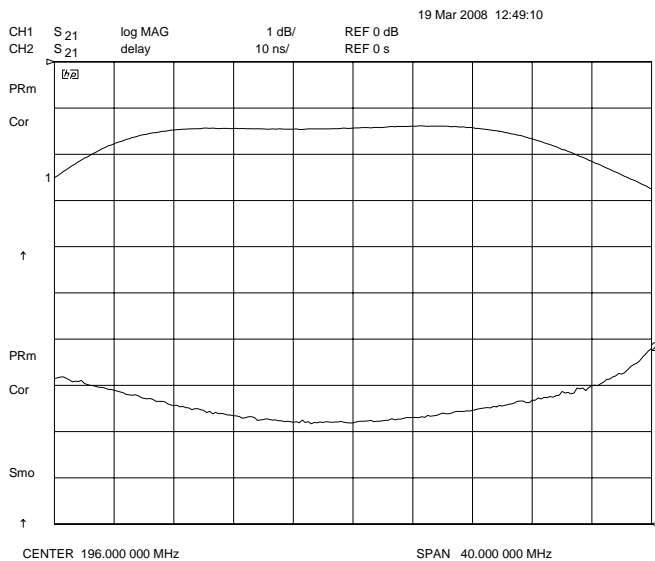

### Overall Response (10 dB/div)

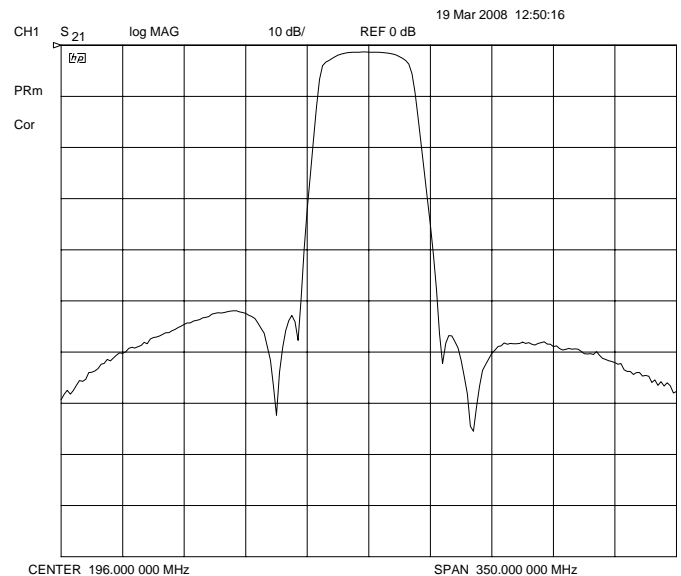

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web www.krfilters.com  
 Email sales@krfilters.com  
 Phone (732) 636-1900  
 Fax (732) 636-1982

# KR Electronics 2825

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	196 MHz
Insertion Loss	< 2.5 dB ( 1.5 dB typical)
Attenuation at 176 MHz	< 3 dB
Attenuation at 216 MHz	< 3 dB
Attenuation at 155 MHz	> 50 dB
Attenuation at 237 MHz	> 50 dB
Source and Load	50 $\Omega$

## Physical Dimensions

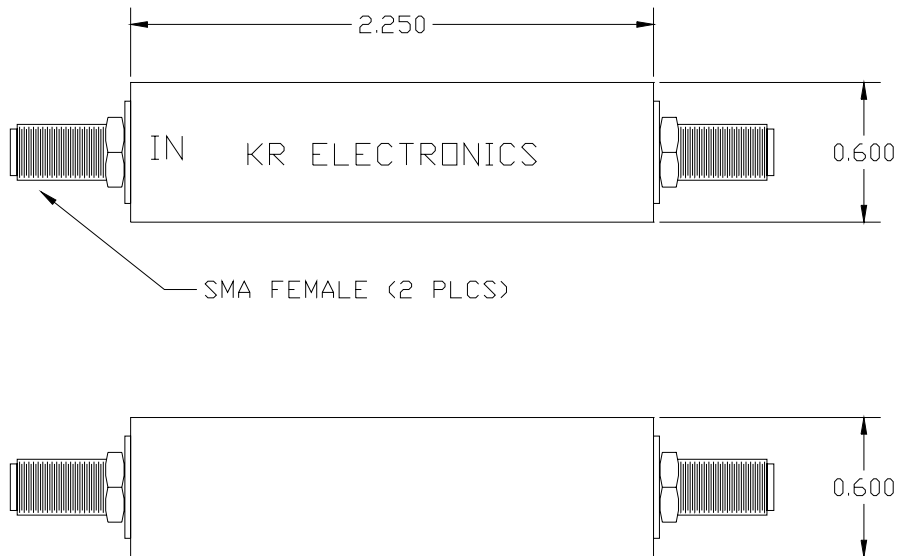

Dimensions in inches  
Metal Case  
Also available in surface mount package

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982