

Thin Film Microwave Resistors


FEATURES

- Small size, down to 20 by 16 mils
- Edged trimmed block resistors
- Pure alumina substrate (99.5 %)
- Various terminations:
 - Pre-tinned over nickel barrier (wraparound or flip chip) for solder reflow
 - Gold pad for wire (or ribbon) bonding (one face only)
- Ohmic range: 10R to 500R
- Small internal reactance (LC down to 1×10^{-24})
- Tolerance 1 %, 2 %, 5 %, 10 %
- TCR: 100 ppm/°C in (- 55 °C, + 155 °C) temperature range



Those miniaturized components are designed in such a way that their internal reactance is very small. When correctly mounted and utilized, they function as almost pure resistors on a very large range of frequency, up to 20 GHz.

DIMENSIONS in millimeters [inches]

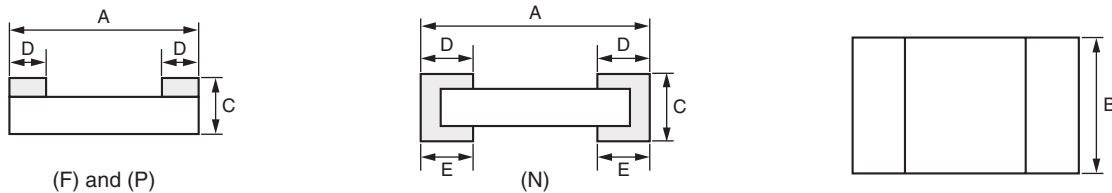

| CASE SIZE MAX. TOL. + 0.1 [+ 0.004] MIN. TOL. - 0.1 [- 0.004] | DIMENSIONS | | | | POWER RATING Pn mW | LIMITING ELEMENT VOLTAGE V |
|---|--|--|--|--|--------------------------|-------------------------------|
| | A | B | C | D/E | | |
| | MAX. TOL. + 0.1 [+ 0.004] MIN. TOL. - 0.1 [- 0.004] | MAX. TOL. + 0.1 [+ 0.004] MIN. TOL. - 0.1 [- 0.004] | MAX. TOL. + 0.127 [+ 0.005] MIN. TOL. - 0.127 [- 0.005] | MAX. TOL. + 0.13 [+ 0.005] MIN. TOL. - 0.13 [- 0.005] | | |
| 02016 | 0.5 [0.020] | 0.4 (0.016) | 0.5 (0.02) | 0.15 [0.006] | 30 | 30 |
| 0402 | 1.00 [0.040] | 0.6 (0.023) | 0.5 (0.02) | 0.38 [0.015] | 50 | 37 |
| 0505 | 1.27 [0.050] | 1.27 (0.050) | 0.5 (0.02) | 0.38 [0.015] | 125 | 50 |
| 0603 | 1.52 [0.060] | 0.75 (0.030) | 0.5 (0.02) | 0.38 [0.015] | 125 | 50 |
| 0705/0805 | 1.91 [0.075] | 1.27 (0.050) | 0.5 (0.02) | 0.38 [0.015] | 200 | 50 |
| 1005 | 2.54 [0.100] | 1.27 (0.050) | 0.5 (0.02) | 0.38 [0.015] | 250 | 75 |
| 1206 | 3.00 [0.126] | 1.60 (0.063) | 0.5 (0.02) | 0.38 [0.015] | 330 | 75 |


| TOLERANCE VERSUS OHMIC VALUES | | | |
|-------------------------------|--------------------------------|---------------------------------|-------------------------------------|
| OHMIC RANGE | $10 \Omega \leq R < 50 \Omega$ | $50 \Omega \leq R < 100 \Omega$ | $100 \Omega \leq R \leq 500 \Omega$ |
| TOLERANCE | 5 %, 10 % | 2 %, 5 %, 10 % | 1 %, 2 %, 5 %, 10 % |

| GLOBAL PART NUMBER INFORMATION | | | | | | | | | | | |
|---|------|---|-----------|-------------|----------------------------|---|---|--|---|---|---|
| New Global Part Numbering: CH0402-50RJP ⁽¹⁾ (preferred part number format) | | | | | | | | | | | |
| C | H | 0 | 4 | 0 | 2 | - | 5 | 0 | R | J | P |
| GLOBAL MODEL | | SIZE | | OHMIC VALUE | | TOLERANCE | | TERMINATION | | | |
| CH | | 02016 0402 0505 0603 0805 1005 1206 | | 10R to 500R | | F = 1 % G = 2 % J = 5 % K = 10 % | | F (Flip Chip): SnAg over nickel barrier N (W/A): SnAg over nickel barrier (except 02016) P (one face): Gold Bonding Pads | | | |
| Historical Part Number example: CH 0402 50R 5% P e2 (will continue to be accepted) | | | | | | | | | | | |
| CH | 0402 | 50R | 5% | P | e2 | | | | | | |
| HISTORICAL MODEL | SIZE | OHMIC VALUE | TOLERANCE | TERMINATION | LEAD (Pb)-FREE VERSION | | | | | | |
| | | | | | e2: tin/silver e4: gold | | | | | | |

Note:

⁽¹⁾ 02016 Not available with N termination - Tape option: Except P termination

TYPICAL HIGH FREQUENCY PERFORMANCE ELECTRICAL MODEL

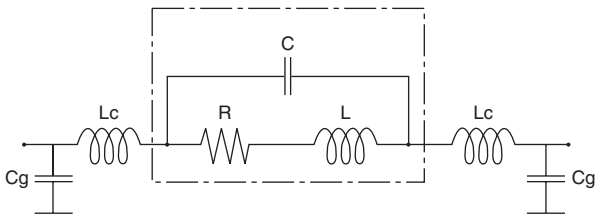

- C:** Internal shunt capacitance
- L:** Internal inductance
- R:** Resistance
- Lc:** External connection inductance
- Cg:** External capacitance to ground

The complex impedance of the chip resistor is given by the following equations:

$$Z = R \frac{1 + j X_L/R}{1 + j R/X_C} \quad \text{with } X_L = 2\pi fL: \text{ Reactance of the internal inductance}$$

$$\theta = \text{Arc tg} \frac{X_L (X_C + X_L) + R^2}{R X_C} \quad \text{with } X_C = 1/2\pi fC: \text{ Reactance of the internal capacitance}$$


$$|Z| = R \left[\frac{1 + (X_L/R)^2}{1 + (R/X_C)^2} \right]^{1/2} \quad f = \text{frequency}$$

This can be seen on the graphs relevant to 02016 (R = 100 Ω, LC = 1 x 10⁻²⁴), 0402 (R = 129 Ω, LC = 15 x 10⁻²⁴) and 1206 (R = 200 Ω, LC = 100 x 10⁻²⁴).

Note:
The external reactance (Lc and Cg) depends on the PCB material, the layout and assembly technology. It does affect the HF performance and needs to be estimated. The external reactance can be utilized to compensate the internal one.


The resistor is purely resistive when R = (L/C)^{1/2} = Z₀. The smaller the LC product the greater the frequency range over which the resistor looks approximately resistive.

INTERNAL IMPEDANCE CURVE FOR 02016 SIZE

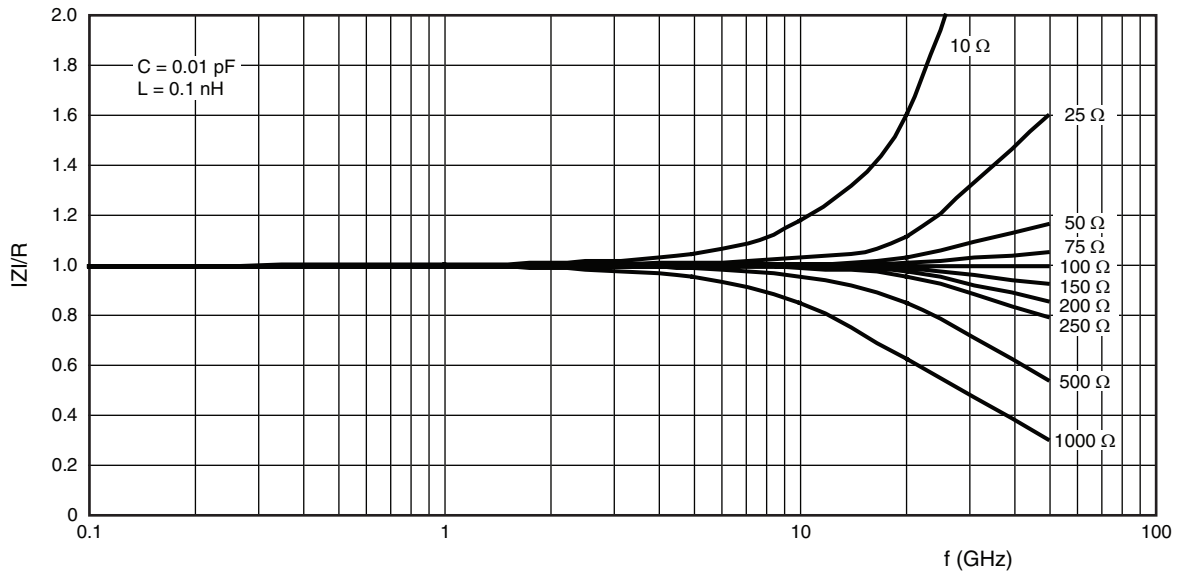


Impedance as a function of frequency for a chip resistor (F and P terminations)

INTERNAL IMPEDANCE CURVE FOR 0402 SIZE

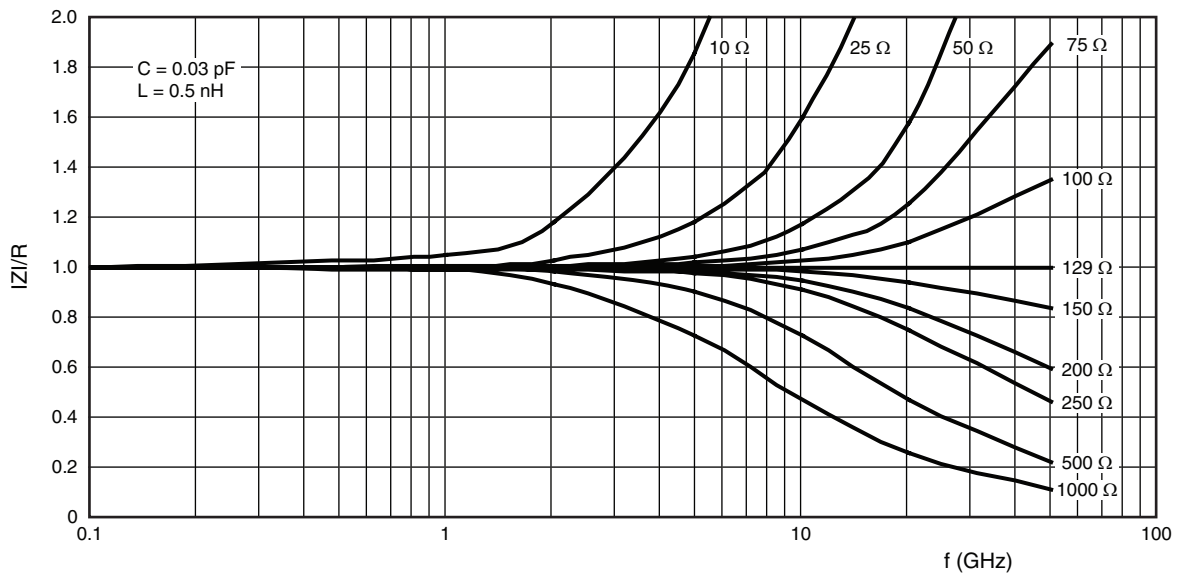


Impedance as a function of frequency for a chip resistor N termination (wraparound)

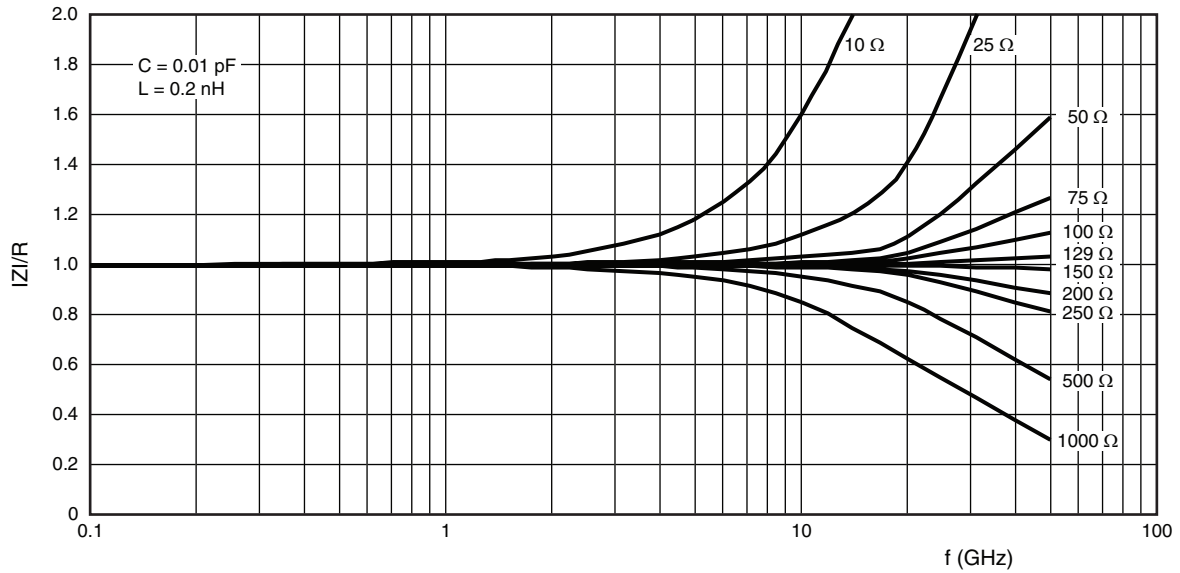


Impedance as a function of frequency for a chip resistor (F and P terminations)

INTERNAL IMPEDANCE CURVE FOR 0603/0505 SIZE

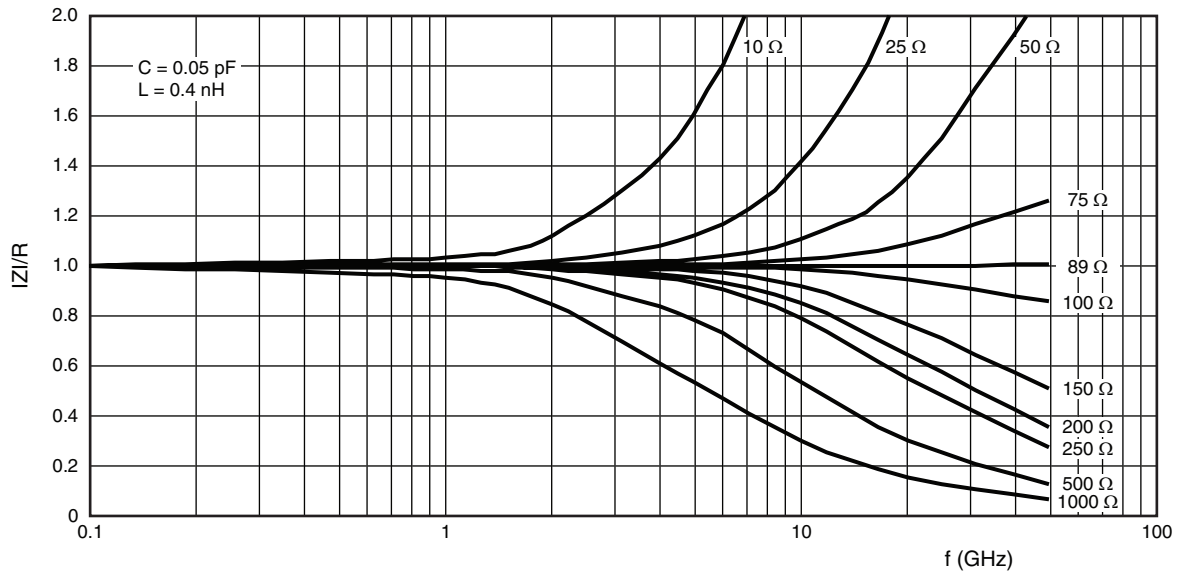


Impedance as a function of frequency for a chip resistor N termination (wraparound)

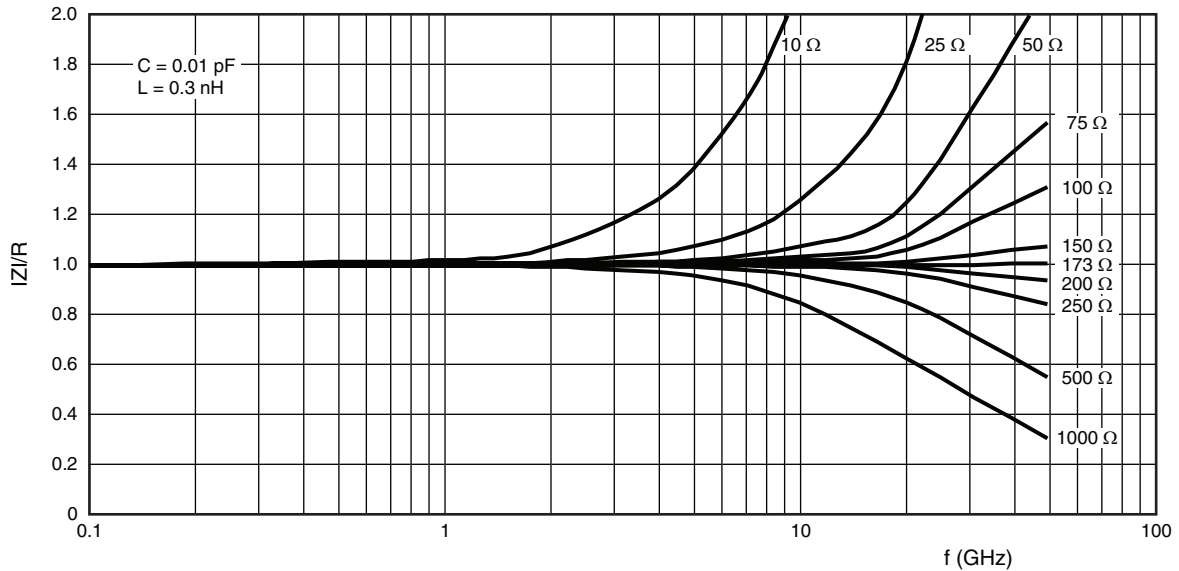


Impedance as a function of frequency for a chip resistor (F and P terminations)

INTERNAL IMPEDANCE CURVE FOR 0805 SIZE

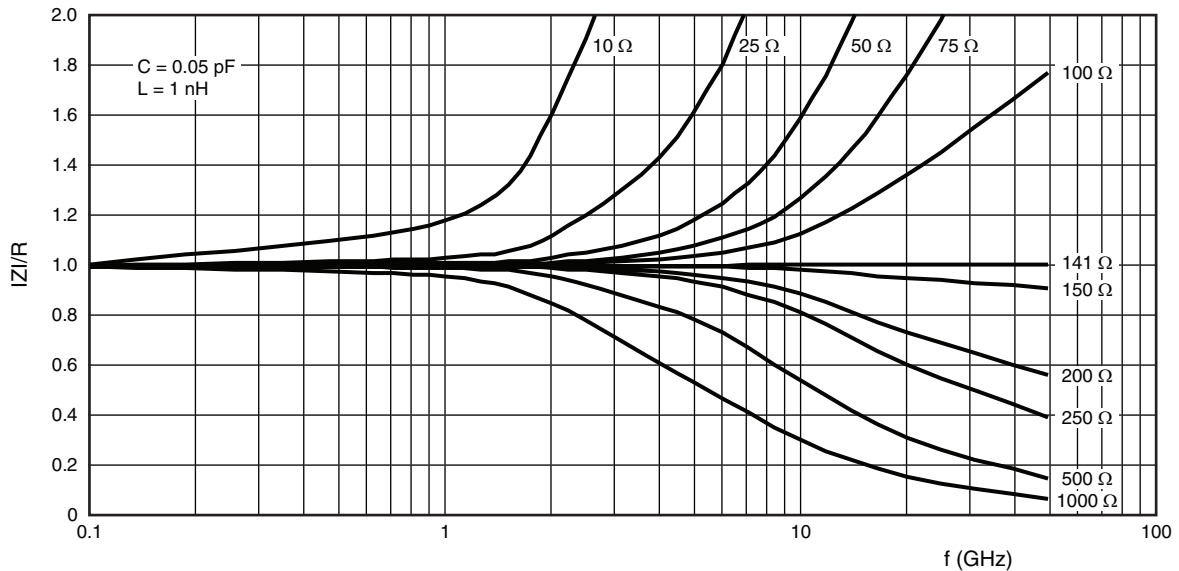


Impedance as a function of frequency for a chip resistor N termination (wraparound)

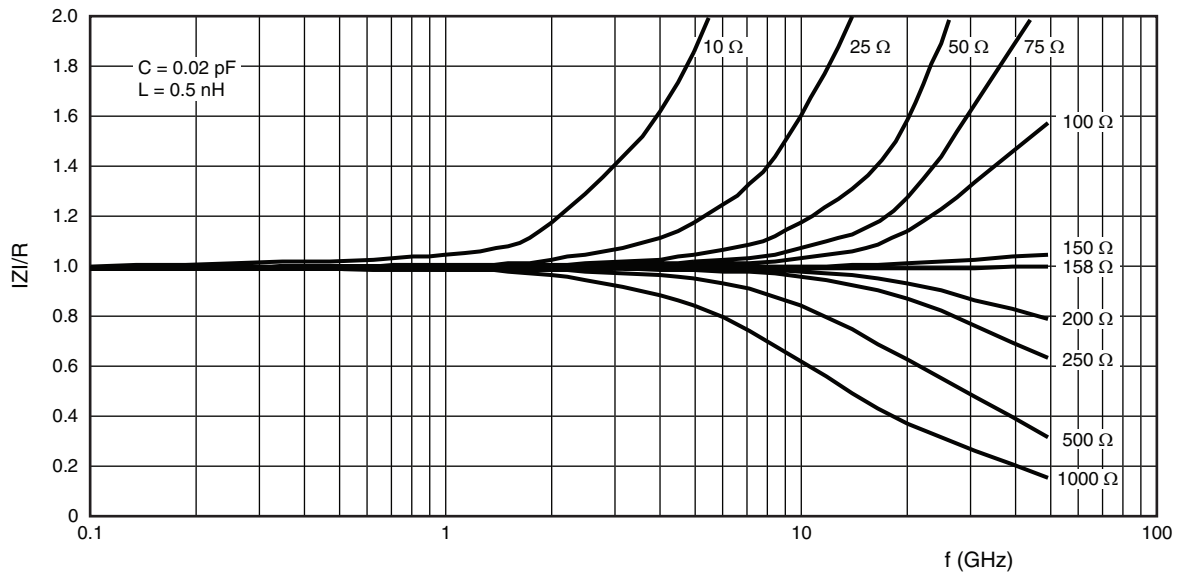


Impedance as a function of frequency for a chip resistor (F and P terminations)

INTERNAL IMPEDANCE CURVE FOR 1005 SIZE

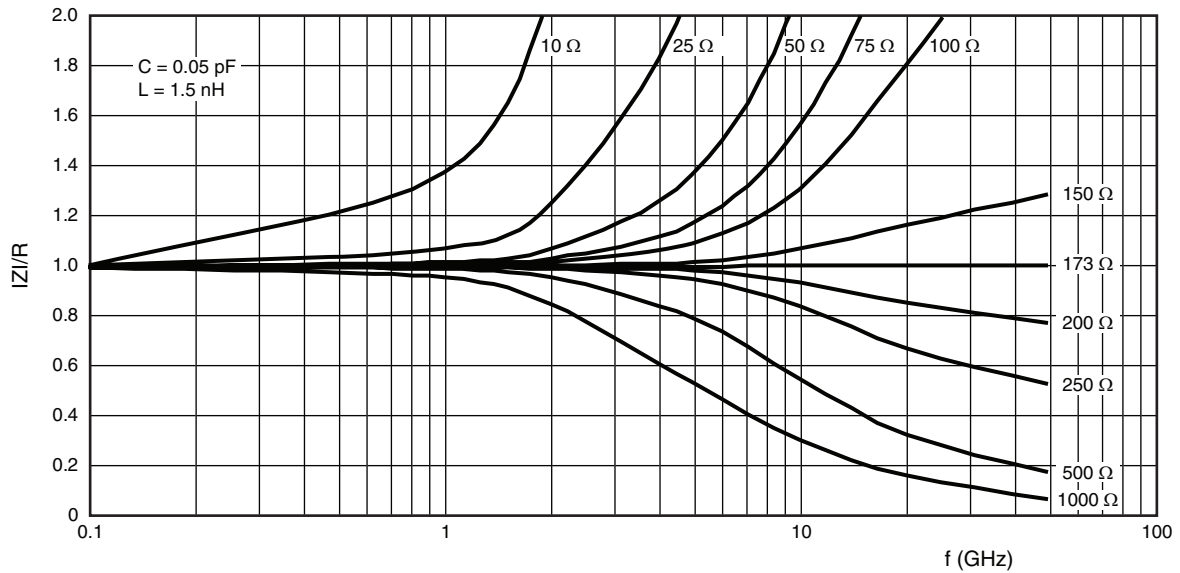


Impedance as a function of frequency for a chip resistor N termination (wraparound)

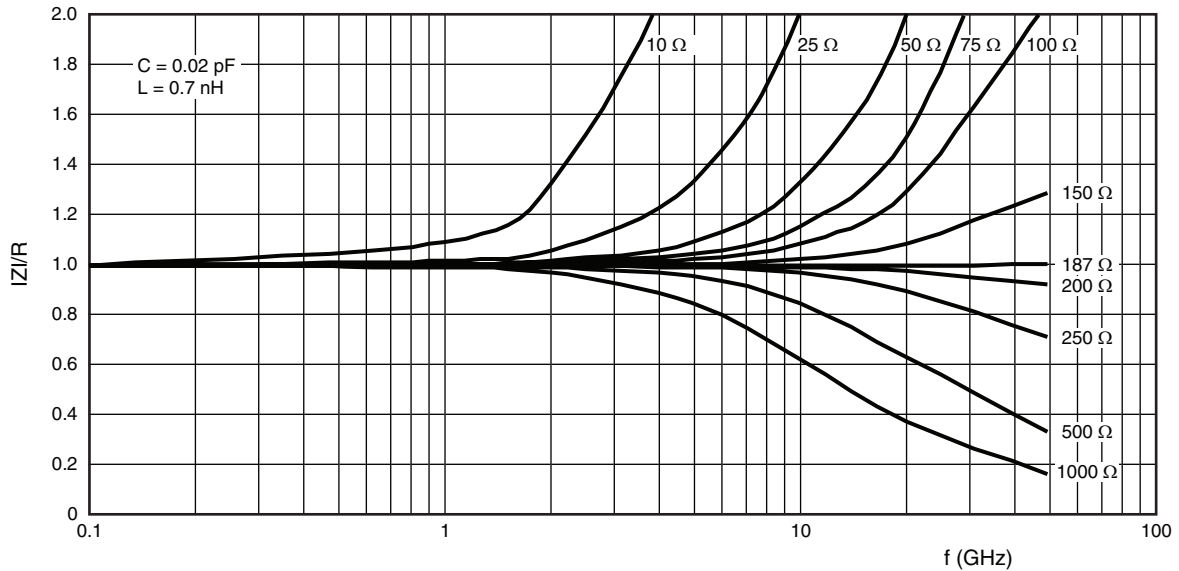


Impedance as a function of frequency for a chip resistor (F and P terminations)

INTERNAL IMPEDANCE CURVE FOR 1206 SIZE

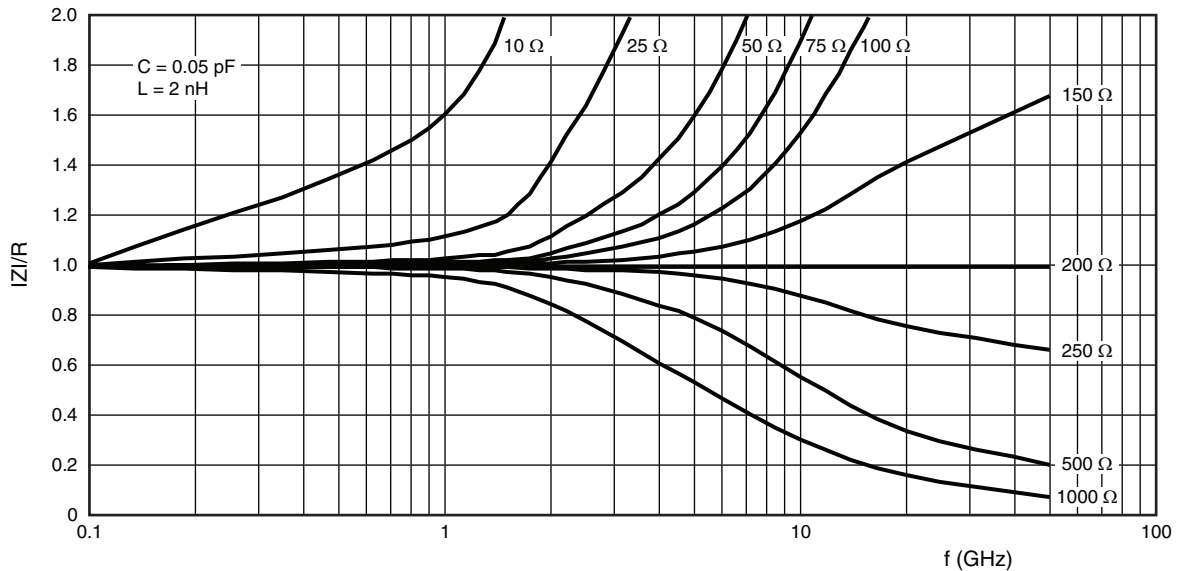

Impedance as a function of frequency for a chip resistor N termination (wraparound)

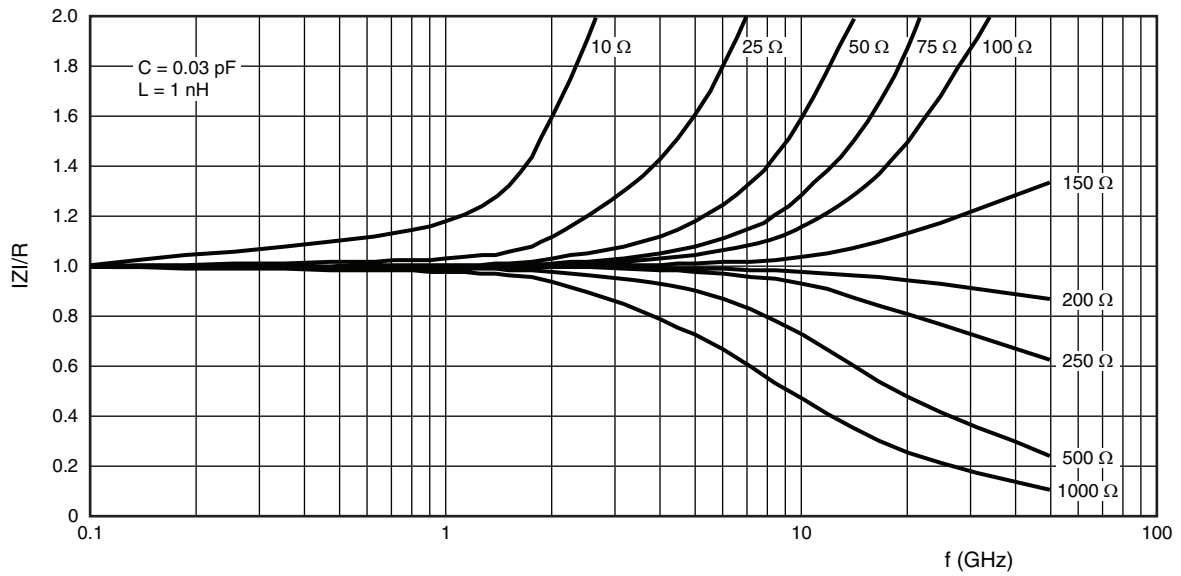

Impedance as a function of frequency for a chip resistor (F and P terminations)



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.