

**Amplifier, Power, 2W**  
**2.5—5.0 GHz**

M/A-COM Products  
 RoHS Compliant

**Features**


- ◆ 2.0 Watt Saturated Output Power Level
- ◆ Variable Drain Voltage (6-10V) Operation
- ◆ MSAG™ Process
- ◆ 5x5 mm 20 Lead PQFN Package

**Description**

The MAAP-000066-PKG003 is a 4-stage 2.0 W power amplifier with on-chip bias networks in a 20 lead PQFN package, allowing easy assembly. This product is fully matched to 50 ohms on both the input and output. It can be used as a power amplifier stage or as a driver stage in high power applications.

Each device is 100% RF tested to ensure performance compliance. The part is fabricated using M/A-COM's GaAs Multifunction Self-Aligned Gate (MSAG™) Process.

The 5 mm PQFN package has a lead-free lead finish that is RoHS compliant and compatible with a 260°C reflow temperature. The package also features low lead inductance and an excellent thermal path. The MTTF is 1,000,000 hours at 170°C.

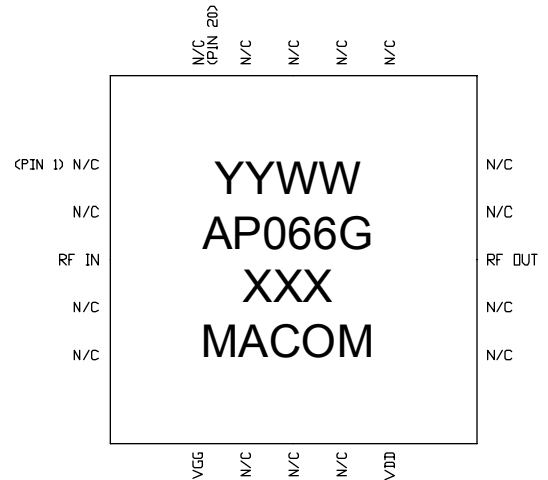

**Primary Applications**

- ◆ Point-to-Point Radios
- ◆ Point-to-Multipoint Radios
- ◆ SatCom
- ◆ Broadband Wireless Access

**Ordering Information**

Description	Die	Tape & Reel (500)	Tape & Reel (1000)	Plastic Pkg Sample Brd
Part Number	MAAPGM0066-DIE	MAAP-000066-TR0500	MAAP-000066-TR1000	MAAP-000066-SMB003

**Electrical Characteristics:  $T_C = 30^\circ C^1$ ,  $Z_0 = 50\Omega$ ,  $V_{DD} = 8V$ ,  $I_{DQ} = 660 mA^2$ ,  $P_{in} = 6dBm$**

Parameter	Symbol	Typical	Units
Bandwidth	f	2.5-5.0	GHz
Output Power	$P_{OUT}$	33.5	dBm
Power Added Efficiency	PAE	30	%
1-dB Compression Point	P1dB	33	dBm
Small Signal Gain	G	28	dB
Input VSWR	VSWR	1.5:1	—
Output VSWR	VSWR	2.5:1	—
Gate Supply Current	$I_{GG}$	< 10	mA
Drain Supply Current	$I_{DD}$	< 1	A
Output Third Order Intercept	IP3	42	dBm
3 <sup>rd</sup> Order Intermodulation Distortion, Single Carrier Level = 23 dBm	IM3	-17	dBm

1.  $T_C$  = Case Temperature.
2. Adjust  $V_{GG}$  between -2.6 to -1.2 to achieve indicated  $I_{DQ}$ .

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266  
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300  
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298  
 Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.  
**RELEASED:** In full production, samples readily available, standard lead times apply.

**Amplifier, Power, 2W**  
**2.5—5.0 GHz**

M/A-COM Products  
 RoHS Compliant

**Maximum Ratings<sup>3</sup>**

Parameter	Symbol	Absolute Maximum	Units
Input Power	P <sub>IN</sub>	11.0	dBm
Drain Supply Voltage	V <sub>DD</sub>	+12.0	V
Gate Supply Voltage	V <sub>GG</sub>	-3.0	V
Quiescent Drain Current (No RF)	I <sub>DQ</sub>	1.04	A
Quiescent DC Power Dissipated (No RF)	P <sub>DISS</sub>	10.4	W
Junction Temperature	T <sub>J</sub>	170	°C
Storage Temperature	T <sub>STG</sub>	-55 to +150	°C

3. Operation beyond these limits may result in permanent damage to the part.

**Recommended Operating Conditions<sup>4</sup>**

Characteristic	Symbol	Min	Typ	Max	Unit
Drain Supply Voltage	V <sub>DD</sub>	6.0	8.0	10.0	V
Gate Supply Voltage	V <sub>GG</sub>	-2.6	-1.7	-1.2	V
Input Power	P <sub>IN</sub>		6	9	dBm
Thermal Resistance	θ <sub>JC</sub>		12.8		°C/W
Case Temperature	T <sub>B</sub>			Note 5	°C

4. Operation outside of these ranges may reduce product reliability.


5. Case Temperature = 170°C — θ<sub>JC</sub> \* V<sub>DD</sub> \* I<sub>DQ</sub>



**Operating Instructions**

This device is static sensitive. Please handle with care. To operate the device, follow these steps.

1. Apply V<sub>GG</sub> = -1.7 V, V<sub>DD</sub> = 0 V.
2. Ramp V<sub>DD</sub> to desired voltage, typically 8 V.
3. Adjust V<sub>GG</sub> to set I<sub>DQ</sub>, (approximately @ -1.7V).
4. Set RF input.
5. Power down sequence in reverse. Turn gate voltage off last.

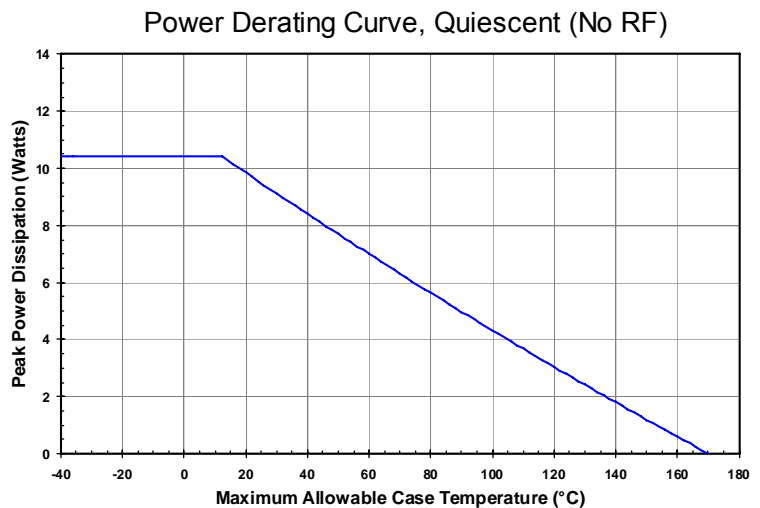

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

**RELEASED:** In full production, samples readily available, standard lead times apply.

**Amplifier, Power, 2W**  
**2.5—5.0 GHz**  
 M/A-COM Products  
 RoHS Compliant

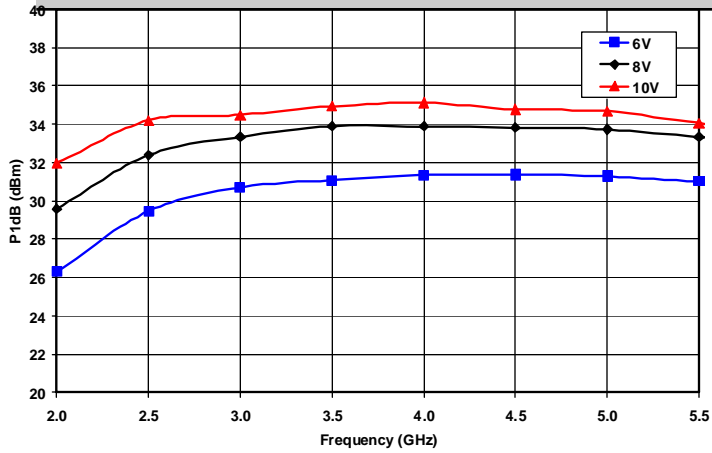


Figure 1. 1 dB Compression Point vs. Frequency and Drain Voltage at IDQ = 660mA

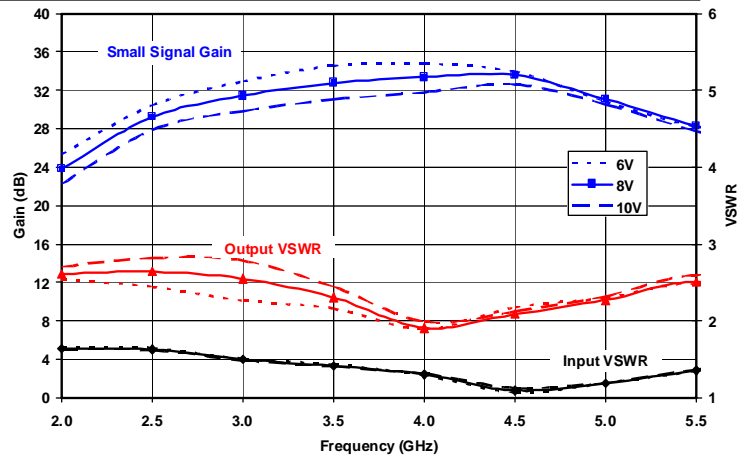


Figure 2. Small Signal Gain and Input & Output VSWR vs. Frequency and Drain Voltage at IDQ = 660mA

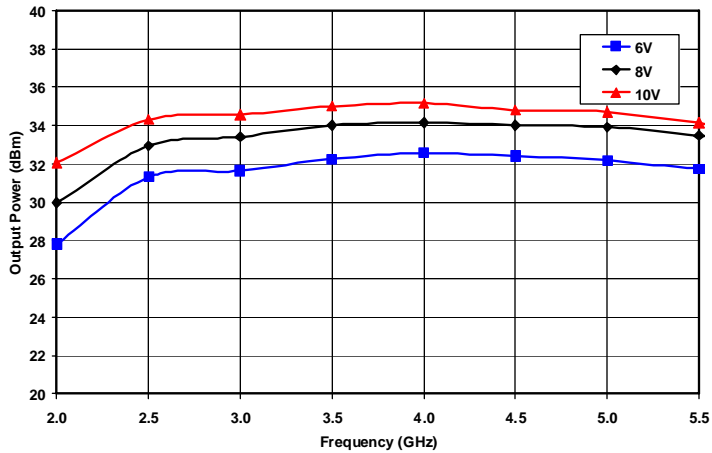


Figure 3. Saturated Output Power vs. Frequency and Drain Voltage at IDQ = 660mA

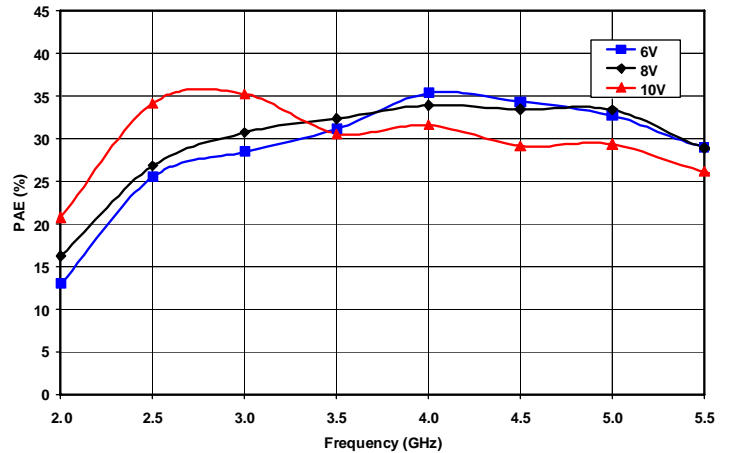


Figure 4. Saturated Power Added Efficiency vs. Frequency and Drain Voltage at IDQ = 660mA

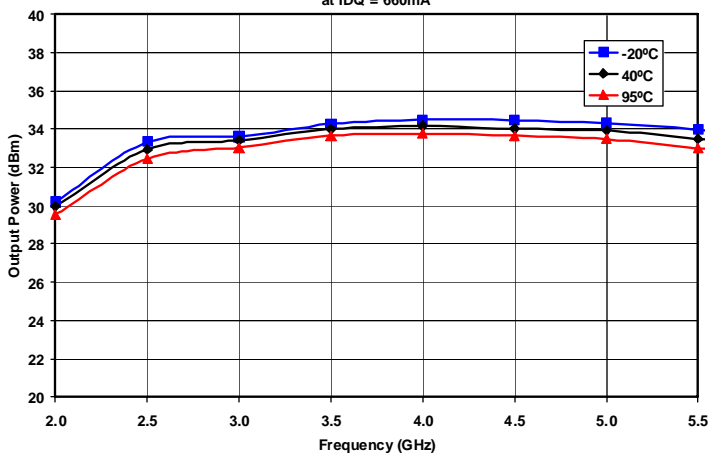


Figure 5. Saturated Output Power vs. Frequency and Case Temperature at VD = 8V and IDQ = 660mA

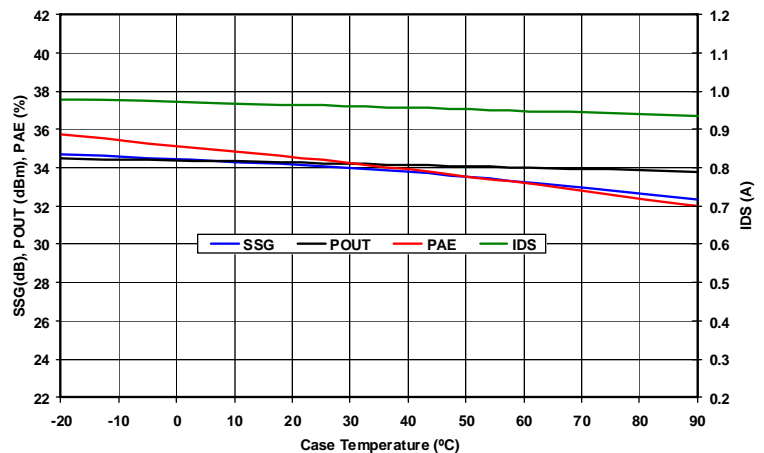


Figure 6. Small Signal Gain & Saturated Output Power, Power Added Efficiency and Drain Current vs. Case Temperature at 4.0 GHz, VD = 8V and IDQ = 660mA

3

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

**RELEASED:** In full production, samples readily available, standard lead times apply.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
  - **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
  - **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
- Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

**Amplifier, Power, 2W  
 2.5—5.0 GHz**

M/A-COM Products  
 RoHS Compliant

VD = 6V

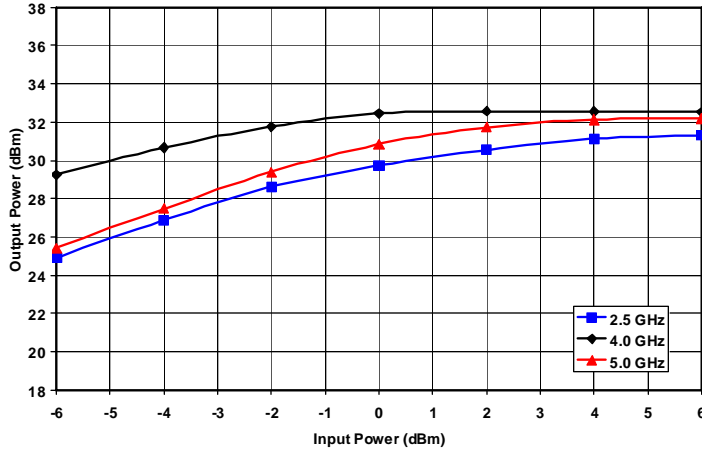


Figure 7. Output Power vs. Input Power and Frequency at VD = 6V and IDQ = 660mA

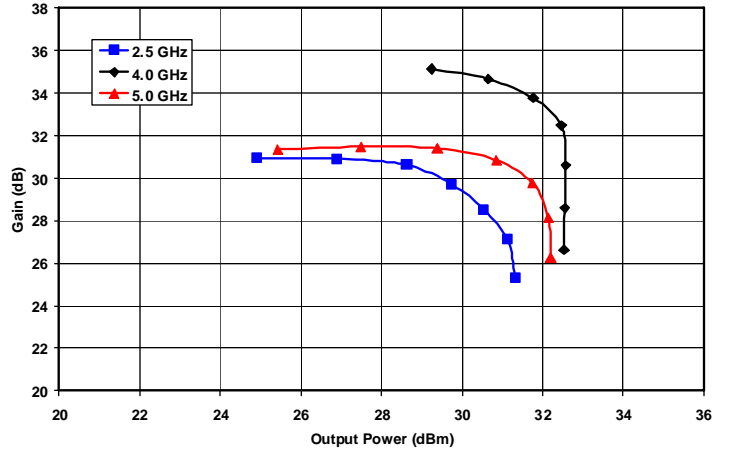


Figure 8. Gain vs. Output Power and Frequency at VD = 6V and IDQ = 660mA

VD = 8V

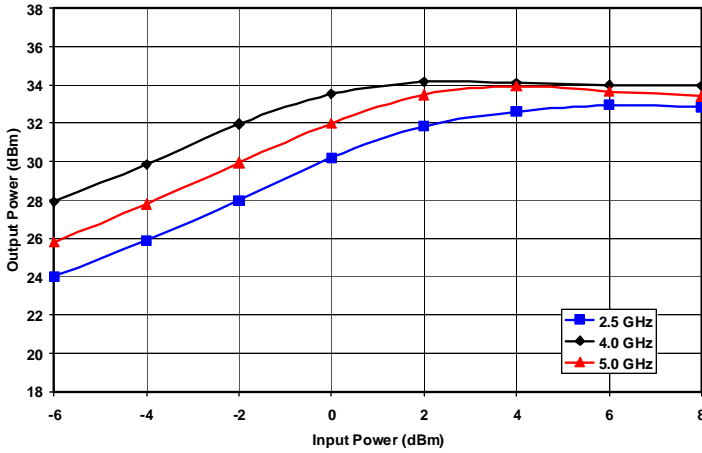


Figure 9. Output Power vs. Input Power and Frequency at VD = 8V and IDQ = 660mA

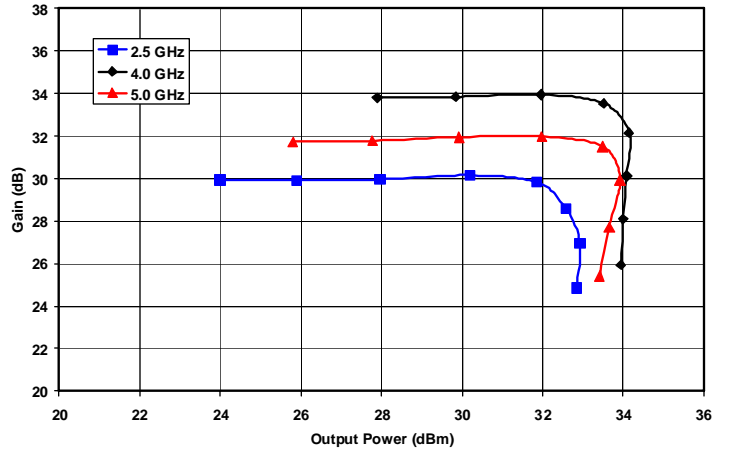


Figure 10. Gain vs. Output Power and Frequency at VD = 8V and IDQ = 660mA

VD = 10V

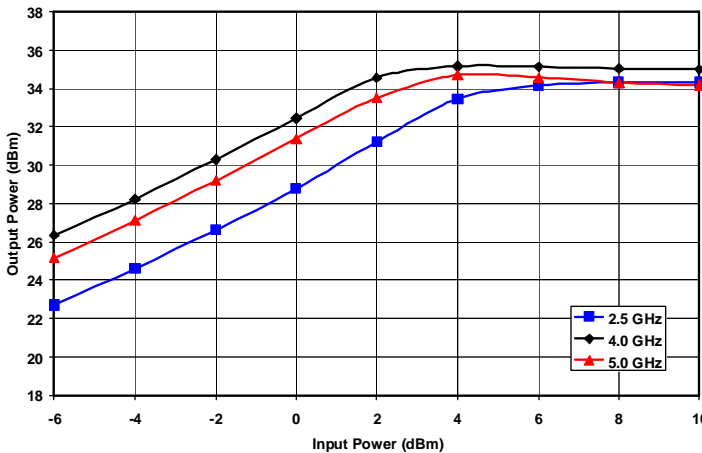


Figure 11. Output Power vs. Input Power and Frequency at VD = 10V and IDQ = 660mA

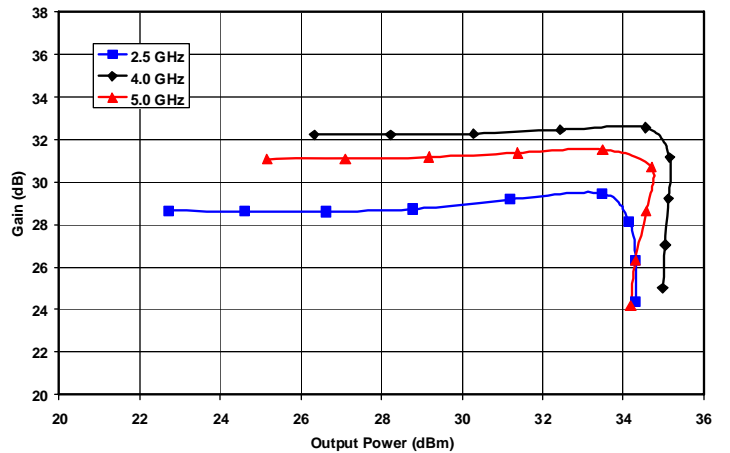


Figure 12. Gain vs. Output Power and Frequency at VD = 10V and IDQ = 660mA

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- North America Tel: 800.366.2266 / Fax: 978.366.2266
  - Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
  - Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
- Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

**RELEASED:** In full production, samples readily available, standard lead times apply.

**Amplifier, Power, 2W  
 2.5—5.0 GHz**

M/A-COM Products  
 RoHS Compliant

VD = 6V

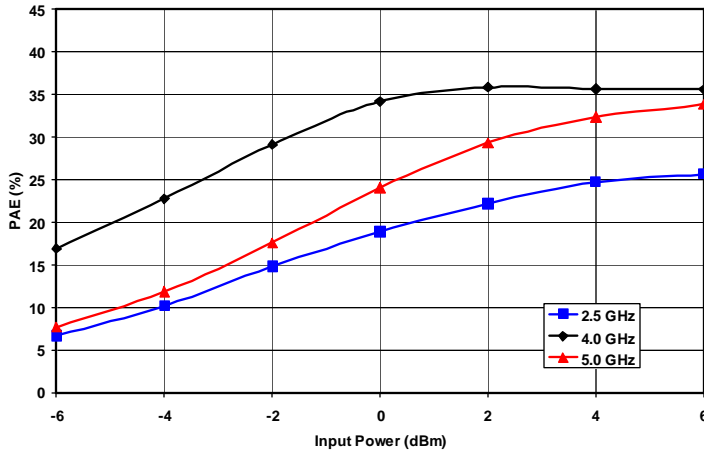


Figure 13. Power Added Efficiency vs. Input Power and Frequency at VD = 6V and IDQ = 660mA

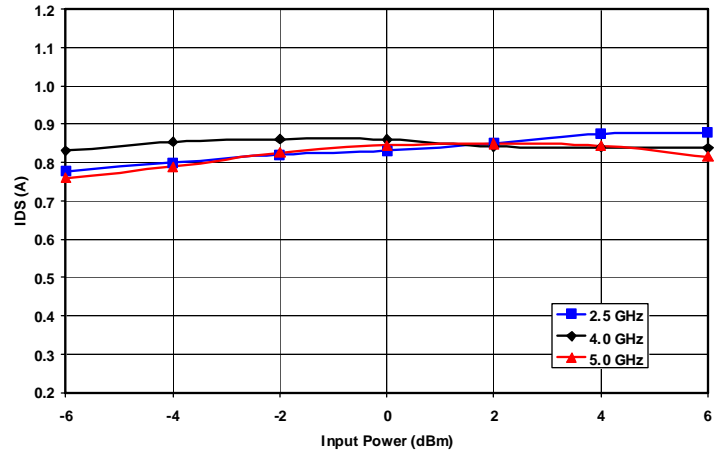


Figure 14. Drain Current vs. Input Power and Frequency at VD = 6V and IDQ = 660mA

VD = 8V

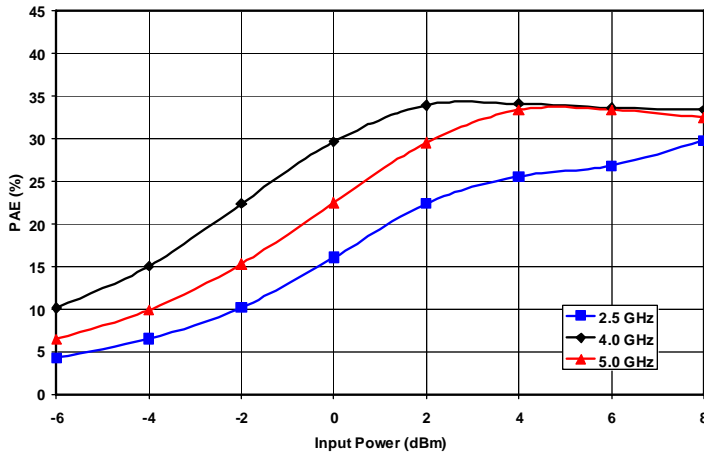


Figure 15. Power Added Efficiency vs. Input Power and Frequency at VD = 8V and IDQ = 660mA

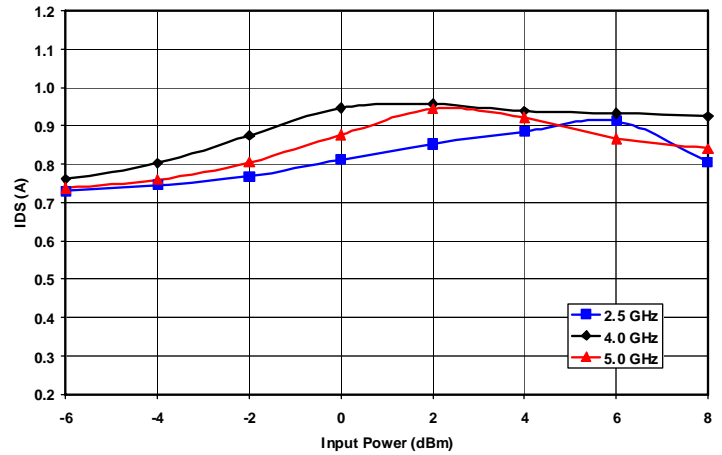


Figure 16. Drain Current vs. Input Power and Frequency at VD = 8V and IDQ = 660mA

VD = 10V

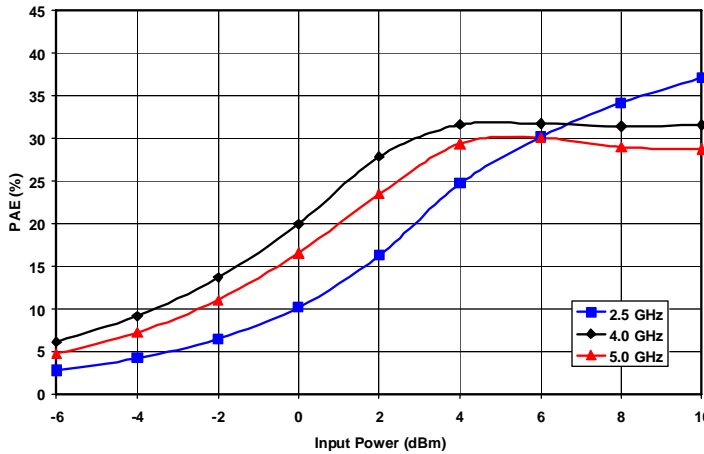


Figure 17. Power Added Efficiency vs. Input Power and Frequency at VD = 10V and IDQ = 660mA

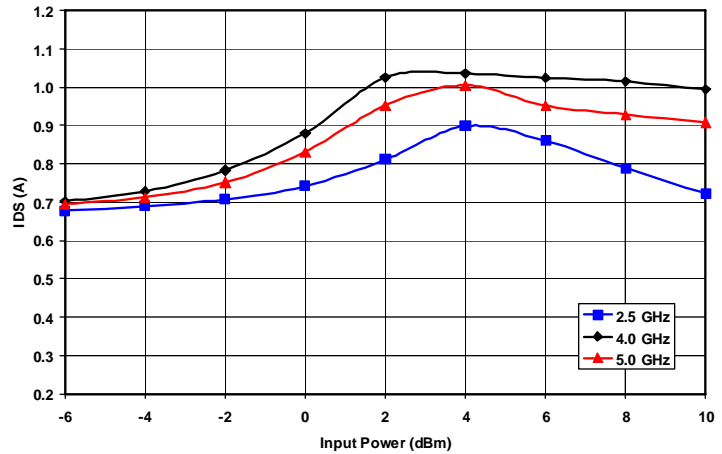


Figure 18. Drain Current vs. Input Power and Frequency at VD = 10V and IDQ = 660mA

5

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.  
**RELEASED:** In full production, samples readily available, standard lead times apply.

**Amplifier, Power, 2W  
 2.5—5.0 GHz**

M/A-COM Products  
 RoHS Compliant

VD = 6V

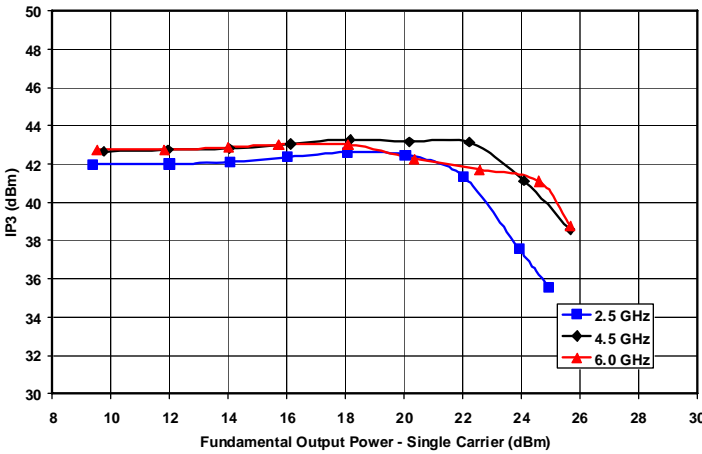


Figure 19. Third Order Intercept vs. Output Power and Frequency at VD = 6V and IDQ = 660mA

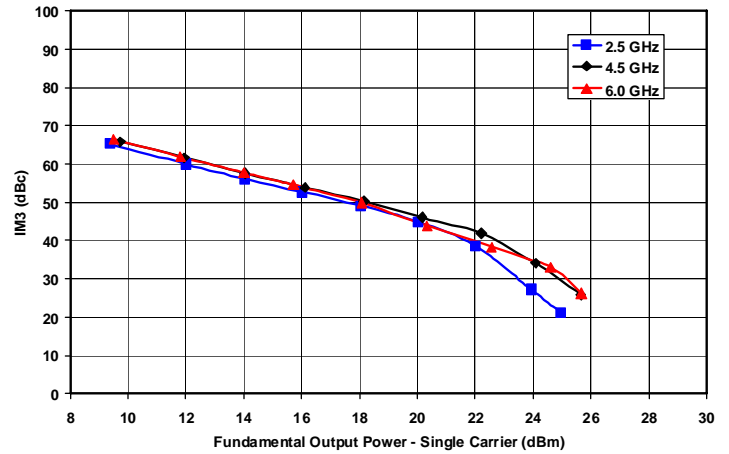


Figure 20. Third Order Intermod vs. Output Power and Frequency at VD = 6V and IDQ = 660mA

VD = 8V

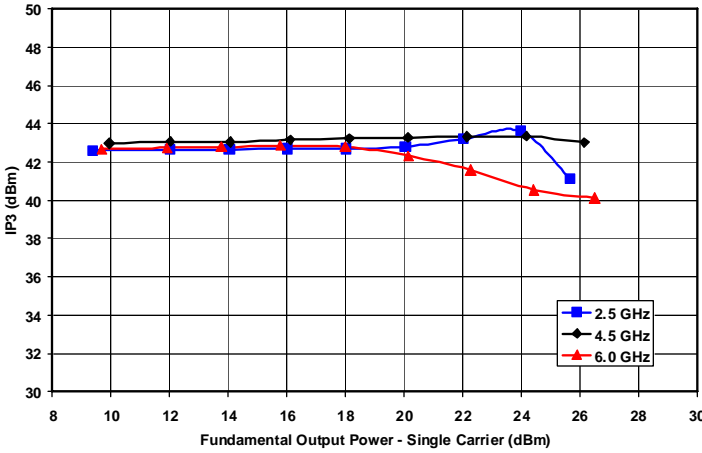


Figure 21. Third Order Intercept vs. Output Power and Frequency at VD = 8V and IDQ = 660mA

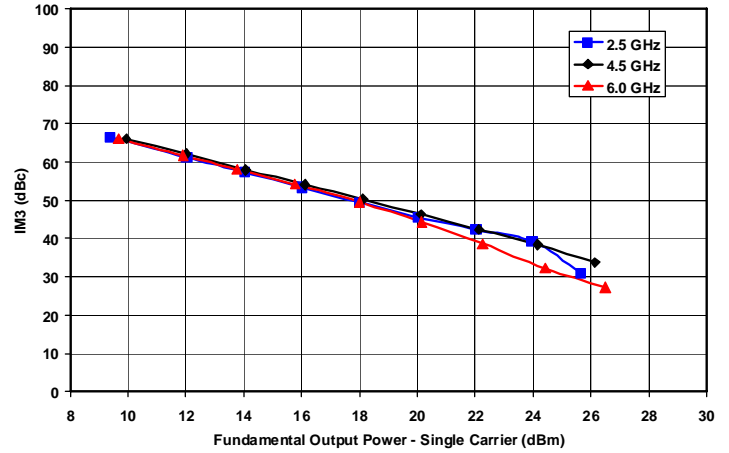


Figure 22. Third Order Intermod vs. Output Power and Frequency at VD = 8V and IDQ = 660mA

VD = 10V

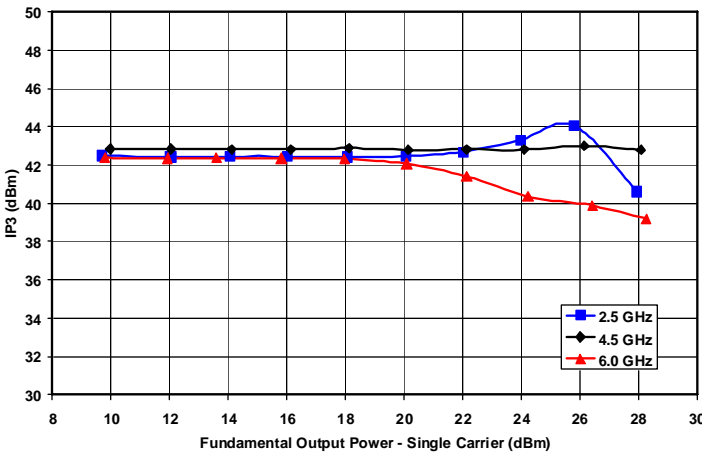


Figure 23. Third Order Intercept vs. Output Power and Frequency at VD = 10V and IDQ = 660mA

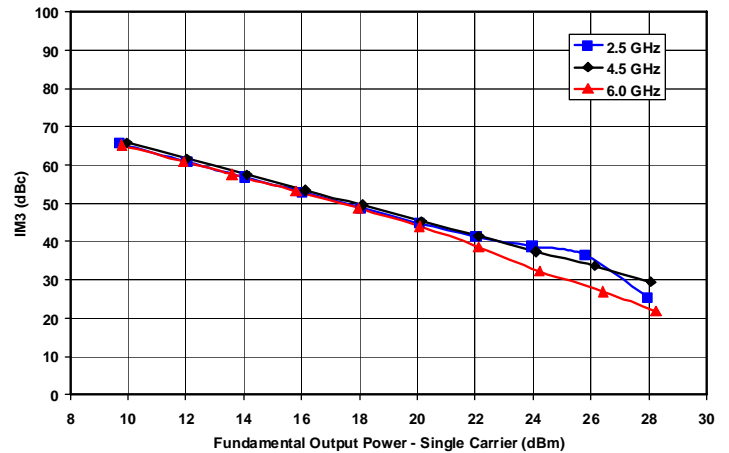


Figure 24. Third Order Intermod vs. Output Power and Frequency at VD = 10V and IDQ = 660mA

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.  
**RELEASED:** In full production, samples readily available, standard lead times apply.

**Amplifier, Power, 2W  
 2.5—5.0 GHz**

M/A-COM Products  
 RoHS Compliant

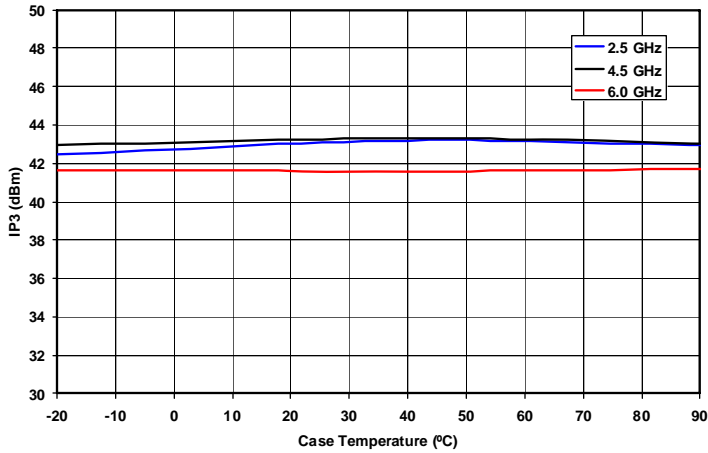


Figure 25. Third Order Intercept vs. Case Temperature and Frequency at Single Carrier Output Power Level = 16 dBm, VD = 8V and IDQ =660mA

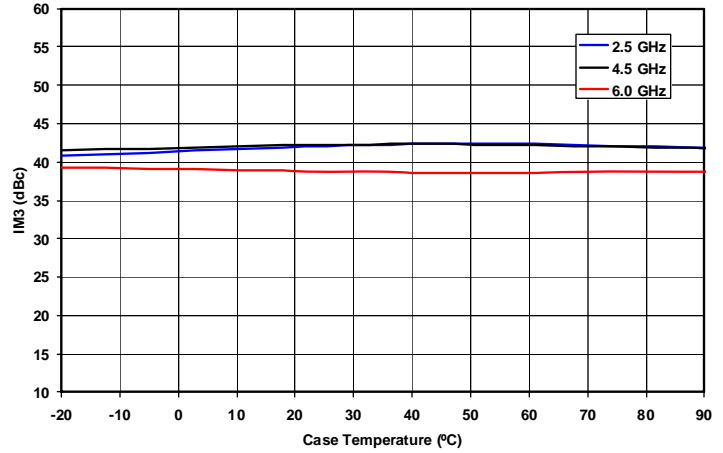


Figure 26. Third Order Intermod vs. Case Temperature and Frequency at Single Carrier Output Power Level = 16 dBm, VD = 8V and IDQ =660mA

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.


- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
  - **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
  - **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
- Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.


**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

**RELEASED:** In full production, samples readily available, standard lead times apply.

**Amplifier, Power, 2W  
 2.5—5.0 GHz** M/A-COM Products  
 RoHS Compliant

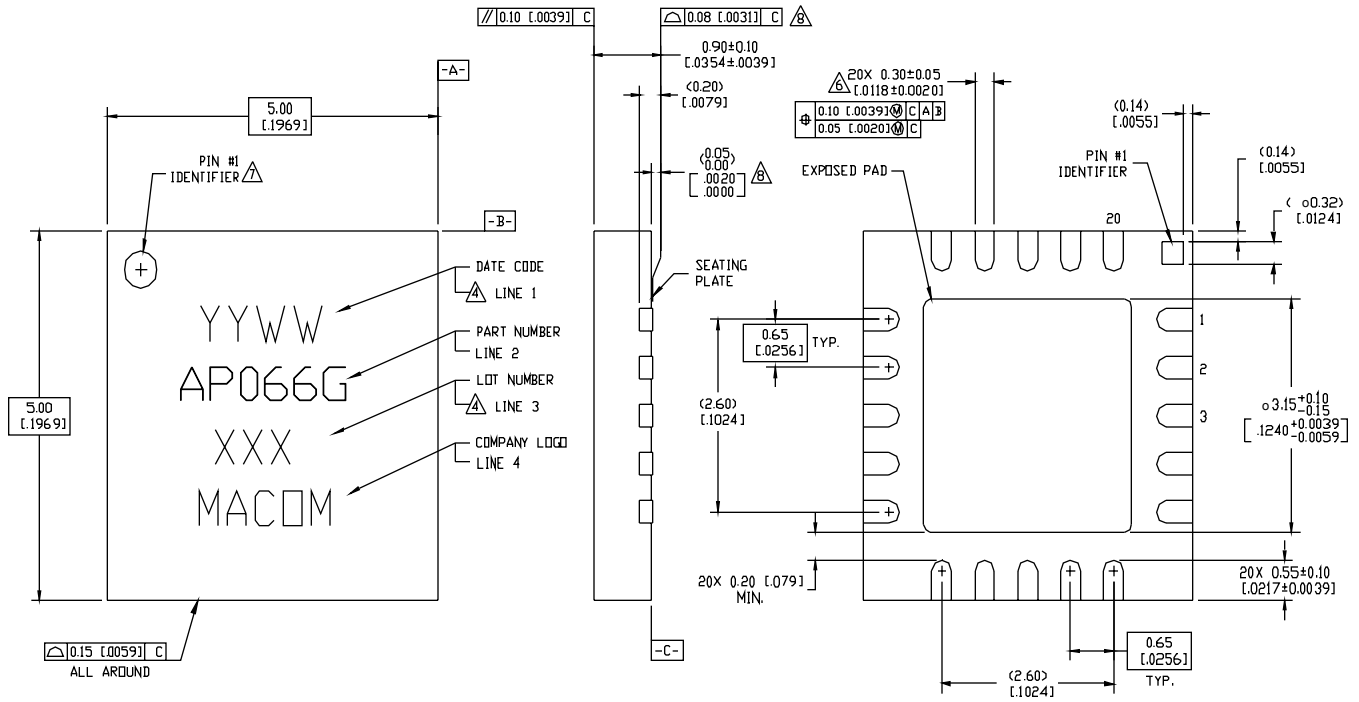

**Figure 27. 5x5 mm 20-Lead PQFN.**

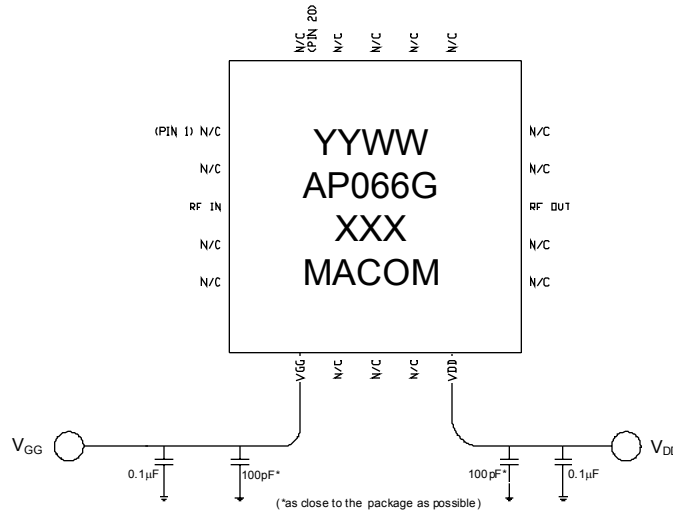

**Figure 28. Recommended Bias Configuration.**

Note: The exposed pad centered on the package bottom must be connected to RF and dc ground for proper electrical and thermal operation.

Refer to M/A-COM Application Note **Surface Mounting Instructions for PQFN Packages #S2083\*** for assembly guidelines.

**Additional Precaution: All parts must receive a bake-out of 125°C for 24 hours prior to any solder reflow operation.**

\*Application Notes can be found by going to the Site Search Page of M/A-COM's web page (<http://www.macom.com/search/search.jsp>) and searching for the required Application Note.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.


- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.  
**RELEASED:** In full production, samples readily available, standard lead times apply.



**Amplifier, Power, 2W  
 2.5—5.0 GHz** M/A-COM Products  
 RoHS Compliant

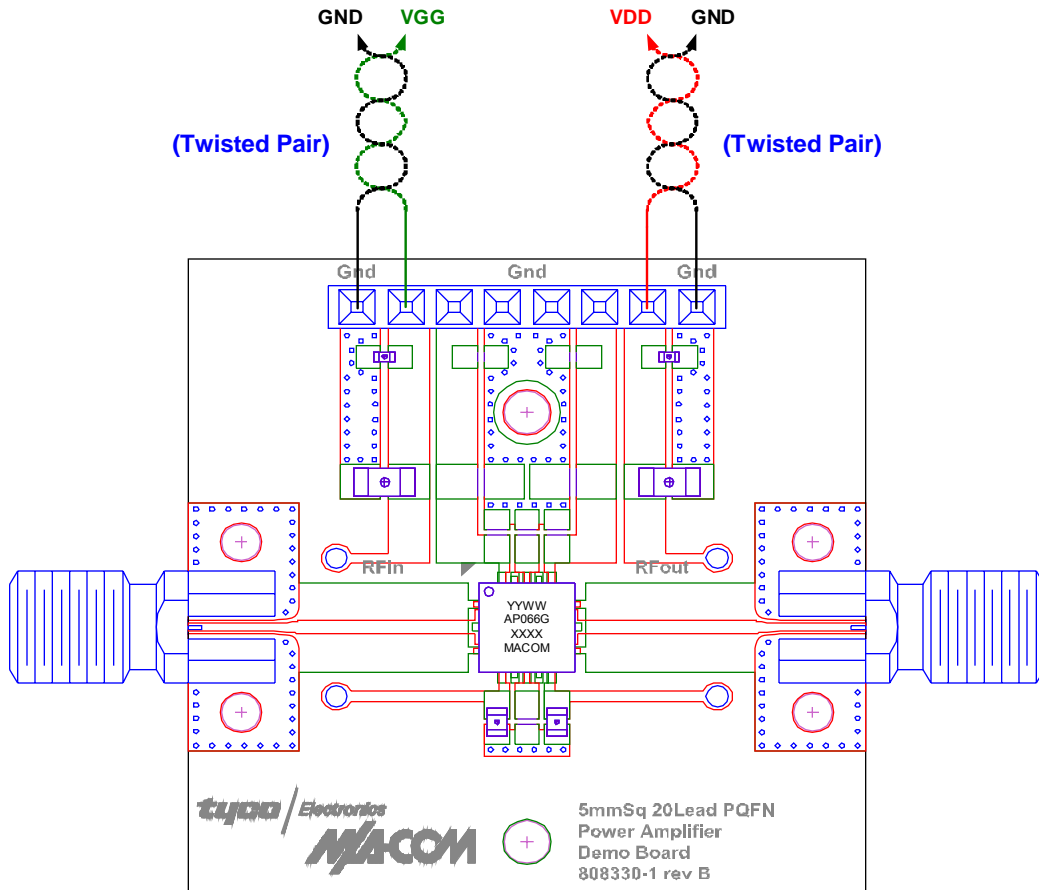

**Figure 29. Demonstration Board PN MAAP-000066-SMB003 (available upon request).**

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
  - **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
  - **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
- Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

**RELEASED:** In full production, samples readily available, standard lead times apply.