

## ISOLATED DC/DC CONVERTERS

48 Vdc Input 12 Vdc/12 A, 3.3 Vdc/46 A, 5 Vdc/30 A, 1.2-2.5 Vdc/50 A Outputs



### 0RQB-C5T Series

RoHS Compliant

Rev.A

- Isolated
- High Efficiency
- High Power Density
- Low Cost
- Input Under Voltage Lockout
- Fixed Frequency (330 kHz)
- Active Low/High (Option)
- UL60950 Recognized (UL/cUL)
- Output Over Voltage Shutdown
- OCP/SCP
- Over Temperature Protection
- Remote On/Off
- Output Voltage Trim
- Positive/Negative Remote Sense
- Input Over Voltage Lockout
- Basic Isolation



### Description

The 0RQB-C5T Series are isolated dc/dc converters that operate from a nominal 48 Vdc source. These units will provide up to 150 W of output power from a nominal 48 Vdc input. These units are designed to be highly efficient and low cost. Typical efficiency of 12 Vdc output at 48 Vdc input at full load is 93%. Features include remote on/off, over current protection and under-voltage lockout. These converters are provided in an industry standard quarter brick package.

### Part Selection

| Output Voltage | Input Voltage | Max. Output Current | Max. Output Power | Typical Efficiency | Model Number Active High | Model Number Active Low |
|----------------|---------------|---------------------|-------------------|--------------------|--------------------------|-------------------------|
| 12 V           | 36 V - 75 V   | 12 A                | 144 W             | 93.0%              | 0RQB-C5T120              | 0RQB-C5T12L             |
| 5.0 V          | 36 V - 75 V   | 30 A                | 150 W             | 92.5%              | 0RQB-C5T050              | 0RQB-C5T05L             |
| 3.3 V          | 36 V - 75 V   | 46 A                | 152 W             | 91.0%              | 0RQB-C5T033              | 0RQB-C5T03L             |
| 2.5 V          | 36 V - 75 V   | 50 A                | 125 W             | 90.5%              | 0RQB-C5T025              | 0RQB-C5T02L             |
| 1.8 V          | 36 V - 75 V   | 50 A                | 90 W              | 88.0%              | 0RQB-C5TV80              | 0RQB-C5TV8L             |
| 1.5 V          | 36 V - 75 V   | 50 A                | 75 W              | 85.0%              | 0RQB-C5TV50              | 0RQB-C5TV5L             |
| 1.2 V          | 36 V - 75 V   | 50 A                | 60 W              | 83.0%              | 0RQB-C5TV20              | 0RQB-C5TV2L             |

**Notes:** 1. Add "G" suffix at the end of the model number to indicate Tray Packaging.

2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

### Absolute Maximum Ratings

| Parameter                  | Min    | Typ | Max    | Notes |
|----------------------------|--------|-----|--------|-------|
| Input Voltage (continuous) | -0.3 V | -   | 80 V   |       |
| Remote On/Off              | -0.3 V | -   | 18 V   |       |
| I/O Isolation Voltage      | -      | -   | 2000 V |       |
| Ambient Temperature        | -40 °C | -   | 85 °C  |       |
| Storage Temperature        | -55 °C | -   | 125 °C |       |

**Note:** All specifications are typical at nominal input, full load at 25 °C unless noted.

## ISOLATED DC/DC CONVERTERS

48 Vdc Input 12 Vdc/12 A, 3.3 Vdc/46 A, 5 Vdc/30 A, 1.2-2.5 Vdc/50 A Outputs



### Input Specifications

| Parameter                                 | Min  | Typ                   | Max                  | Notes  |
|---|------|-----------------------|----------------------|--|
| Input Voltage                             | 36 V | 48 V                  | 75 V                 |  |
| Input Current (full load)                 |      |                       |                      |  |
| Vo=12 V                                   | -    | -                     | 4.5 A                |  |
| Vo=5.0 V                                  | -    | -                     | 4.9 A                |  |
| Vo=3.3 V                                  | -    | -                     | 4.9 A                |  |
| Vo=2.5 V                                  | -    | -                     | 4.1 A                |  |
| Vo=1.8 V                                  | -    | -                     | 3.0 A                |  |
| Vo=1.5 V                                  | -    | -                     | 2.6 A                |  |
| Vo=1.2 V                                  | -    | -                     | 2.1 A                |  |
| Input Current (no load)                   | -    | 120 mA                | 180 mA               |  |
| Remote Off Input Current                  |      | 10 mA                 | 15 mA                |  |
| Input Reflected Ripple Current (pk-pk)    | -    | 10 mA                 | 15 mA                | Tested with simulated source impedance of 10 $\mu$ H, 5 Hz to 20 MHz; use a 100 $\mu$ F /100 V electrolytic capacitor with ESR = 1 ohm max. at 200 kHz at 25 °C. |
| Input Reflected Ripple Current (rms)      | -    | 1.5 mA                | 3 mA                 |  |
| I <sup>2</sup> t Inrush Current Transient | -    | 0.05 A <sup>2</sup> s | 0.1 A <sup>2</sup> s |  |
| Turn-on Voltage Threshold                 | 32 V | 34 V                  | 35 V                 |  |
| Turn-off Voltage Threshold                | 30 V | 32 V                  | 34 V                 |  |
| Input over voltage Lockout                | 76 V | 78 V                  | 80 V                 |  |

**Note:** All specifications are typical at nominal input, full load at 25 °C unless noted.

### Output Specifications

| Parameter   | Min      | Typ      | Max      | Notes                      |
|---|----------|----------|----------|----------------------------|
| Output Voltage Set Point                          |          |          |          |                            |
| Vo=12 V   | 11.790 V | 12.030 V | 12.270 V | Vin=48 V, Io=50% full load |
| Vo=5.0 V  | 4.925 V  | 5.004 V  | 5.075 V  |                            |
| Vo=3.3 V  | 3.260 V  | 3.308 V  | 3.360 V  |                            |
| Vo=2.5 V  | 2.450 V  | 2.503 V  | 2.550 V  |                            |
| Vo=1.8 V  | 1.770 V  | 1.808 V  | 1.844 V  |                            |
| Vo=1.5 V  | 1.477 V  | 1.500 V  | 1.523 V  |                            |
| Vo=1.2 V  | 1.176 V  | 1.200 V  | 1.224 V  |                            |
| Line Regulation                                   |          |          |          |                            |
| Vo=12 V   | -        | ±8 mV    | ±15 mV   |                            |
| Vo=5.0 V  | -        | ±5 mV    | ±15 mV   |                            |
| Vo=1.2 V-3.3 V                                    | -        | ±3 mV    | ±6 mV    |                            |
| Load Regulation                                   |          |          |          |                            |
| Vo=5.0 V-12 V                                     | -        | ±10 mV   | ±20 mV   |                            |
| Vo=2.5 V-3.3 V                                    | -        | ±5 mV    | ±10 mV   |                            |
| Vo=1.2 V-1.8 V                                    | -        | ±2 mV    | ±5 mV    |                            |
| Regulation Over Temperature<br>(-40 °C to +85 °C) |          |          |          |                            |
| Vo=12 V   | -        | ±60 mV   | ±100 mV  |                            |
| Vo=5.0 V  | -        | ±40 mV   | ±65 mV   |                            |
| Vo=3.3 V  | -        | ±30 mV   | ±50 mV   |                            |
| Vo=2.5 V  | -        | ±20 mV   | ±40 mV   |                            |
| Vo=1.8 V-1.2 V                                    | -        | ±15 mV   | ±30 mV   |                            |
| Output Current                                    |          |          |          |                            |
| Vo=12 V   | 0 A      | -        | 12 A     |                            |
| Vo=5.0 V  | 0 A      | -        | 30 A     |                            |
| Vo=3.3 V  | 0 A      | -        | 46 A     |                            |
| Vo=1.2 V-2.5 V                                    | 0 A      | -        | 50 A     |                            |

## ISOLATED DC/DC CONVERTERS

48 Vdc Input 12 Vdc/12 A, 3.3 Vdc/46 A, 5 Vdc/30 A, 1.2-2.5 Vdc/50 A Outputs



### Output Specifications (continued)

| Parameter                     |                | Min       | Typ                | Max                | Notes   |   |
|-------------------------------|----------------|-----------|--------------------|--------------------|---|---|
| Current Limit Threshold       | Vo=12 V        | 14 A      | 15.5 A             | 18 A               |   |   |
|                               | Vo=5.0 V       | 35 A      | 40 A               | 45 A               |   |   |
|                               | Vo=3.3 V       | 50 A      | 60 A               | 65 A               |   |   |
|                               | Vo=1.2 V-2.5 V | 55 A      | 60 A               | 65 A               |   |   |
| Short Circuit Surge Transient |                | -         | 3 A <sup>2</sup> s | 5 A <sup>2</sup> s |   |   |
| Ripple and Noise (rms)        | Vo=12 V        | -         | 25 mV              | 30 mV              | Test conditions:<br>0-20 MHz BW, with a<br>1 uF ceramic capacitor<br>and a 10 uF Tantalum<br>capacitor at the output. |   |
|                               | Vo=5.0 V       | -         | 20 mV              | 25 mV              |   |   |
|                               | Vo=3.3 V       | -         | 20 mV              | 20 mV              |   |   |
|                               | Vo=1.2 V-2.5 V | -         | 15 mV              | 20 mV              |   |   |
| Ripple and Noise (pk-pk)      | Vo=12 V        | -         | 70 mV              | 90 mV              |   |   |
|                               | Vo=5.0 V       | -         | 60 mV              | 80 mV              |   |   |
|                               | Vo=3.3 V       | -         | 50 mV              | 70 mV              |   |   |
|                               | Vo=1.8 V       | -         | 45 mV              | 60 mV              |   |   |
|                               | Vo=2.5 V       | -         | 40 mV              | 60 mV              |   |   |
|                               | Vo=1.5 V       | -         | 55 mV              | 70 mV              |   |   |
|                               | Vo=1.2 V       | -         | 40 mV              | 60 mV              |   |   |
| Turn on Time                  |                | 10 mS     | -                  | 100 mS             |   |   |
| Overshoot at Turn on          |                | -         | 0%                 | 5%                 |   |   |
| Output Capacitance            | Vo=12.0 V      | 0 uF      | -                  | 2200 uF            |   |   |
|                               | Vo=5.0 V       | 0 uF      | -                  | 10000 uF           |   |   |
|                               | Vo=1.2 V-3.3 V | 0 uF      | -                  | 20000 uF           |   |   |
| <b>Transient Response</b>     |                |           |                    |                    |   |   |
| 50% ~ 75%<br>Max Load         | Overshoot      | Vo=12.0 V | -                  | 600 mV             | 800 mV  | Test conditions: di/dt =<br>0.1 A/uS, Vin=48 V,<br>with a 1 uF ceramic<br>capacitor and a 10 uF<br>Tantalum capacitor at<br>the output. |
|                               | Settling Time  |           | -                  | 200 uS             | 300 uS  |   |
| 75% ~ 50%<br>Max Load         | Overshoot      | Vo=12.0 V | -                  | 600 mV             | 800 mV  |   |
|                               | Settling Time  |           | -                  | 200 uS             | 300 uS  |   |
| 50% ~ 75%<br>Max Load         | Overshoot      | Vo=5.0 V  | -                  | 250 mV             | 375 mV  |   |
|                               | Settling Time  |           | -                  | 100 uS             | 200 uS  |   |
| 75% ~ 50%<br>Max Load         | Overshoot      | Vo=5.0 V  | -                  | 250 mV             | 375 mV  |   |
|                               | Settling Time  |           | -                  | 100 uS             | 200 uS  |   |
| 50% ~ 75%<br>Max Load         | Overshoot      | Vo=3.3 V  | -                  | 100 mV             | 200 mV  |   |
|                               | Settling Time  |           | -                  | 200 uS             | 300 uS  |   |
| 75% ~ 50%<br>Max Load         | Overshoot      | Vo=3.3 V  | -                  | 100 mV             | 200 mV  |   |
|                               | Settling Time  |           | -                  | 200 uS             | 300 uS  |   |
| 50% ~ 75%<br>Max Load         | Overshoot      | Vo=2.5 V  | -                  | 100 mV             | 200 mV  |   |
|                               | Settling Time  |           | -                  | 300 uS             | 400 uS  |   |
| 75% ~ 50%<br>Max Load         | Overshoot      | Vo=2.5 V  | -                  | 100 mV             | 200 mV  |   |
|                               | Settling Time  |           | -                  | 300 uS             | 400 uS  |   |
| 50% ~ 75%<br>Max Load         | Overshoot      | Vo=1.8 V  | -                  | 100 mV             | 140 mV  |   |
|                               | Settling Time  |           | -                  | 200 uS             | 300 uS  |   |
| 75% ~ 50%<br>Max Load         | Overshoot      | Vo=1.5 V  | -                  | 100 mV             | 140 mV  |   |
|                               | Settling Time  |           | -                  | 200 uS             | 300 uS  |   |
| 50% ~ 75%<br>Max Load         | Overshoot      | Vo=1.2 V  | -                  | 100 mV             | 120 mV  |   |
|                               | Settling Time  |           | -                  | 200 uS             | 300 uS  |   |
| 75% ~ 50%<br>Max Load         | Overshoot      | Vo=1.2 V  | -                  | 100 mV             | 120 mV  |   |
|                               | Settling Time  |           | -                  | 200 uS             | 300 uS  |   |

**Note:** All specifications are typical at nominal input, full load at 25 °C unless noted.

## ISOLATED DC/DC CONVERTERS

48 Vdc Input 12 Vdc/12 A, 3.3 Vdc/46 A, 5 Vdc/30 A, 1.2-2.5 Vdc/50 A Outputs



### General Specifications

| Parameter                         | Min             | Typ                   | Max     | Notes  |                               |
|-----------------------------------|-----------------|-----------------------|---------|--|-------------------------------|
| Efficiency                        | Vo=12 V         | 90%                   | 93%     | -  | Vin=48 V, full load, Ta=25 °C |
|                                   | Vo=5.0 V        | 89%                   | 92.5%   | -  |                               |
|                                   | Vo=3.3 V        | 88%                   | 91%     | -  |                               |
|                                   | Vo=2.5 V        | 87%                   | 90.5%   | -  |                               |
|                                   | Vo=1.8 V        | 85%                   | 88%     | -  |                               |
|                                   | Vo=1.5 V        | 82%                   | 85%     | -  |                               |
|                                   | Vo=1.2 V        | 80%                   | 83%     | -  |                               |
| Switching Frequency               | 280 kHz         | 330 kHz               | 380 kHz |  |                               |
| Isolation capacitance             | -               | 1500 pF               | -       |  |                               |
| Input to Output Isolation Voltage | -               | -                     | 2000 V  |  |                               |
| Remote Sense Compensation         | -               | -                     | 10% Vo  | The total voltage increased by trim and remote sense should not exceed 10%Vo.  |                               |
| Output Voltage Trim Range         | 80% Vo          | -                     | 110% Vo |  |                               |
| Over Temperature Protection       | -               | 125 °C                | -       |  |                               |
| Over Voltage Protection           | -               | 130% Vo               | -       | Vin=48V, full load, Hiccup mode  |                               |
| MTBF                              | 1,109,917 hours |                       |         | Calculated Per Bell Core SR-332 (Io =80% load, Vin=48 V, Vo=3.3 V; Ta = 25 °C) |                               |
| Dimensions                        | Inches          | 2.30 x 1.45 x 0.395   |         |  |                               |
|                                   | millimeters     | 58.42 x 36.83 x 10.03 |         |  |                               |
| Weight                            | -               | 41 g                  | -       |  |                               |

**Note:** All specifications are typical at nominal input, full load at 25 °C unless noted.

### Control Specifications

| Parameter              | Min         | Typ    | Max     | Notes |  |
|------------------------|-------------|--------|---------|-------|--|
| <b>Remote On/Off</b>   |             |        |         |       |  |
| Signal Low (Unit On)   | Active Low  | -0.3 V | -       | 0.8 V | 0RQB-C5TxxL. The remote on/off pin open, Unit off. |
| Signal High (Unit Off) |             | 2.4 V  | -       |       |  |
| Signal Low (Unit Off)  | Active High | -0.3 V | -       | 0.8 V | 0RQB-C5Txx0. The remote on/off pin open, Unit on.  |
| Signal High (Unit On)  |             | 2.4 V  | -       |       |  |
| Current Sink           | 0 mA        | -      | 0.75 mA |       |  |

## ISOLATED DC/DC CONVERTERS

48 Vdc Input 12 Vdc/12 A, 3.3 Vdc/46 A, 5 Vdc/30 A, 1.2-2.5 Vdc/50 A Outputs

**bel**  
POWER PRODUCTS

### Output Trim Equations

Equations for calculating the trim resistor are shown below (Unit: kΩ). The Trim Down resistor should be connected between the Trim pin and Ground pin. The Trim Up resistor should be connected between the Trim pin and the Vout. Only one of the resistors should be used for any given application.


#### 1) For $V_o=1.5\text{ V} - 12\text{ V}$ :

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22$$

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 626}{1.225 \cdot \delta} - 10.22$$

**Note:**

$$\delta = \frac{(V_{o\_req} - V_o)}{V_o} \times 100[\%]$$

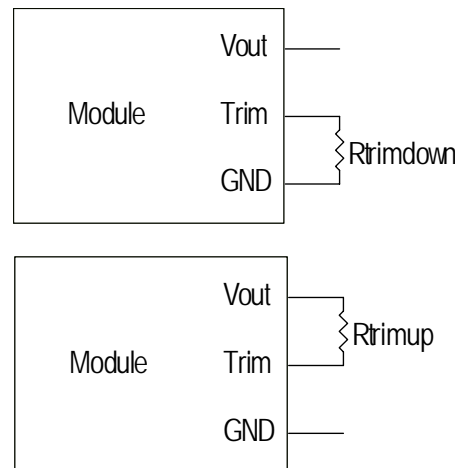

$V_{o\_req}$ =Desired (trimmed) output voltage [V];  $V_o$ =output voltage  
 $V_o=12.004\text{ V}$  for 12 V output;  $V_o=5\text{ V}$  for 5.004 V output;  $V_o=3.308\text{ V}$  for 3.3 V output;  $V_o=2.503\text{ V}$  for 2.5 V output;  $V_o=1.808\text{ V}$  for 1.8 V output;  $V_o=1.503\text{ V}$  for 1.5 V output

#### 2) For $V_o=1.2\text{ V}$ :

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22$$

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 313}{0.6125 \cdot \delta} - 10.22$$

**Note:**

$$\delta = \frac{(V_{o\_req} - V_o)}{V_o} \times 100[\%]$$


$V_{o\_req}$ =Desired (trimmed) output voltage [V];  $V_o$ =output voltage  
 $V_o=1.202\text{ V}$  for 1.2 V output

# ISOLATED DC/DC CONVERTERS


48 Vdc Input 12 Vdc/12 A, 3.3 Vdc/46 A, 5 Vdc/30 A, 1.2-2.5 Vdc/50 A Outputs




## Efficiency Data

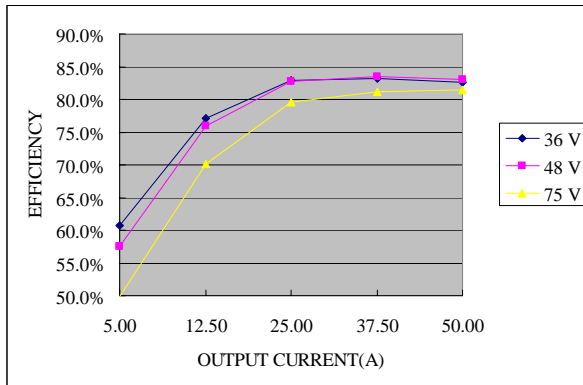


0RQB-C5TV2x

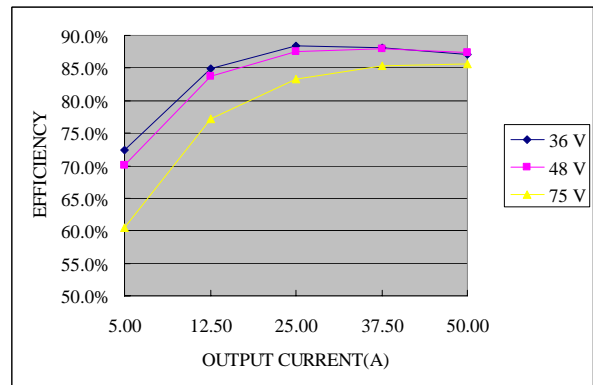


0RQB-C5TV5x

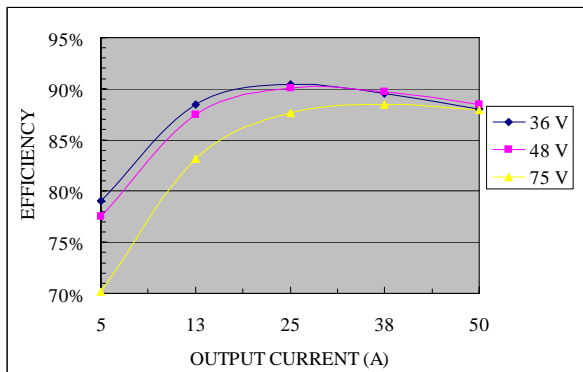


0RQB-C5TV8x

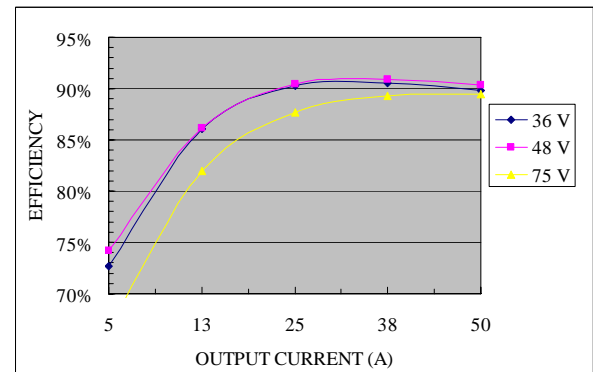

0RQB-C5T02x

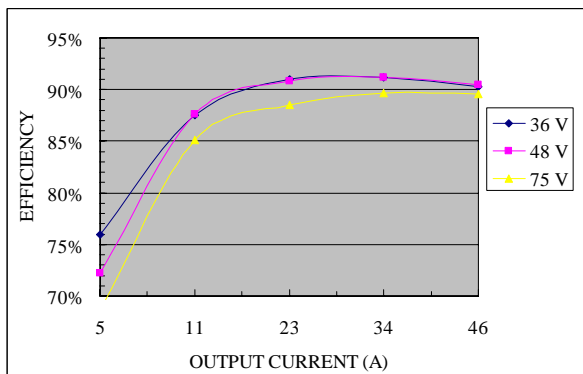

0RQB-C5T03x

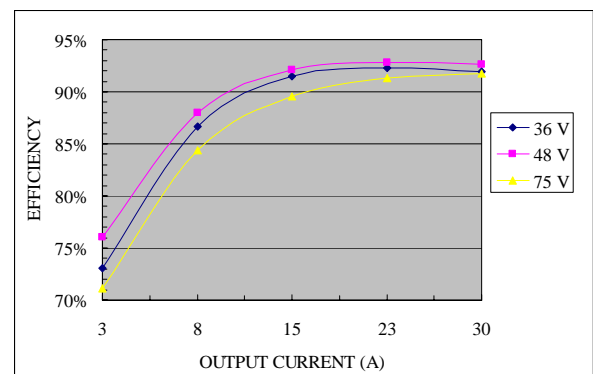


0RQB-C5T05x

# ISOLATED DC/DC CONVERTERS

48 Vdc Input 12 Vdc/12 A, 3.3 Vdc/46 A, 5 Vdc/30 A, 1.2-2.5 Vdc/50 A Outputs




## Efficiency Data (continued)

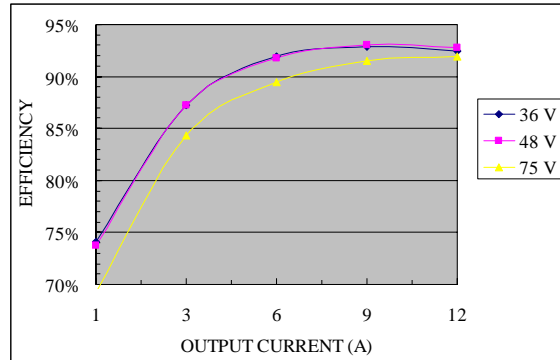


0RQB-C5T12x

## Thermal Derating Curves


Vin=48V, with maximum junction temperature of semiconductors derated to 120 degree C.

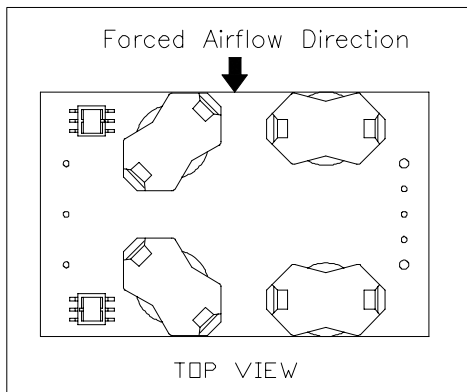


0RQB-C5Txxx

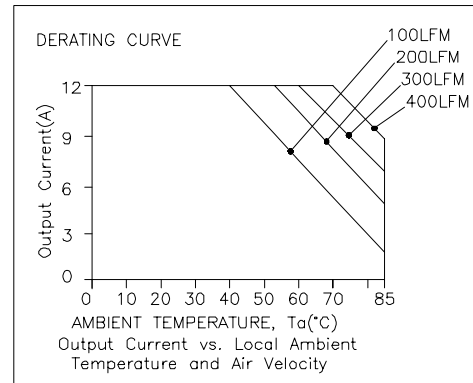

0RQB-C5T12x

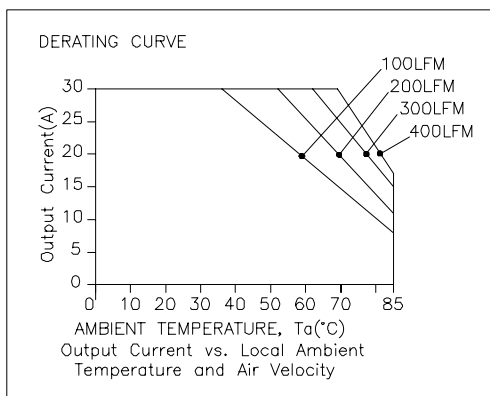

0RQB-C5T05x

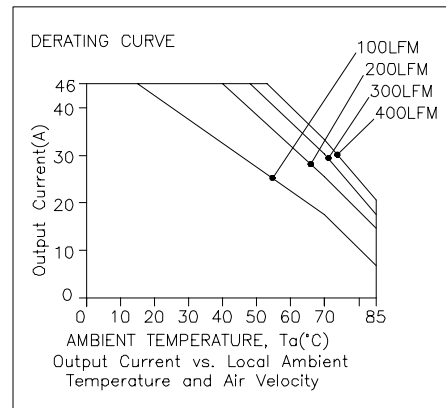


0RQB-C5T03x

# ISOLATED DC/DC CONVERTERS


48 Vdc Input 12 Vdc/12 A, 3.3 Vdc/46 A, 5 Vdc/30 A, 1.2-2.5 Vdc/50 A Outputs




## Thermal Derating Curves (continued)

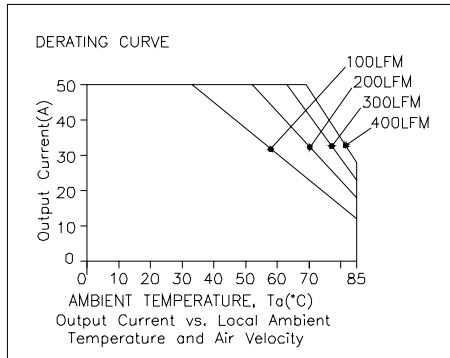


0RQB-C5T02x

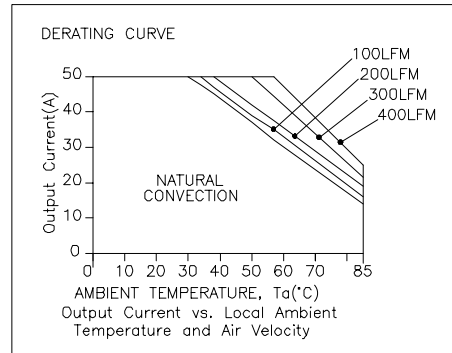

0RQB-C5T8x

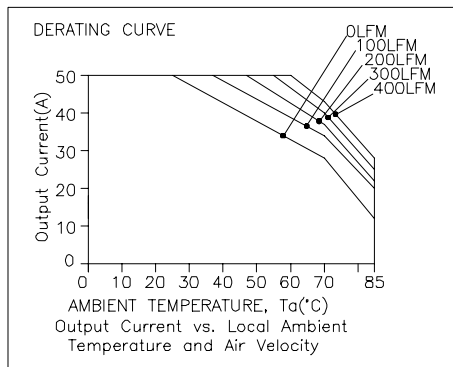


0RQB-C5TV5x

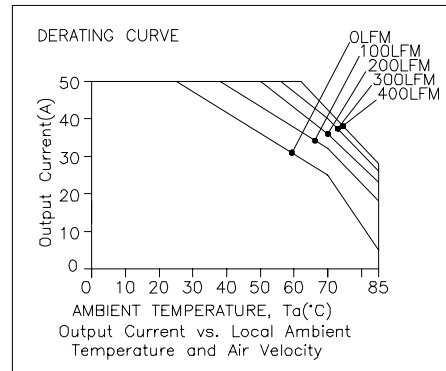

0RQB-C5TV2x

## Thermal Reference

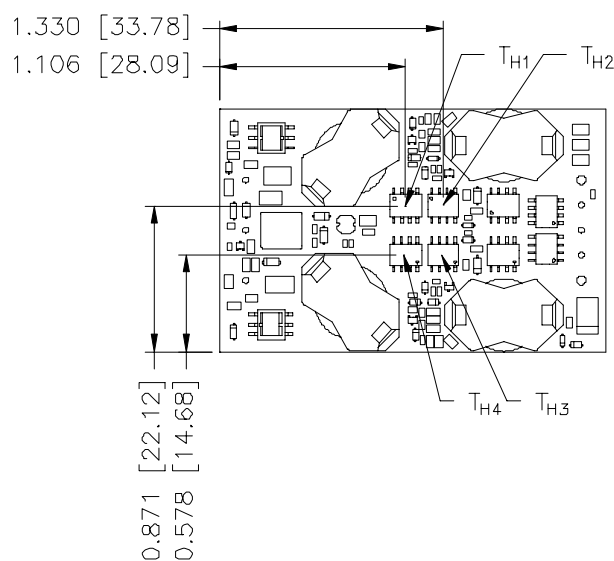

**Note:** TH<sub>1</sub>, TH<sub>2</sub>, TH<sub>3</sub> and TH<sub>4</sub> are hot spots which should not exceed 115 degree C.




# ISOLATED DC/DC CONVERTERS


48 Vdc Input 12 Vdc/12 A, 3.3 Vdc/46 A, 5 Vdc/30 A, 1.2-2.5 Vdc/50 A Outputs




## Ripple and Noise Waveforms

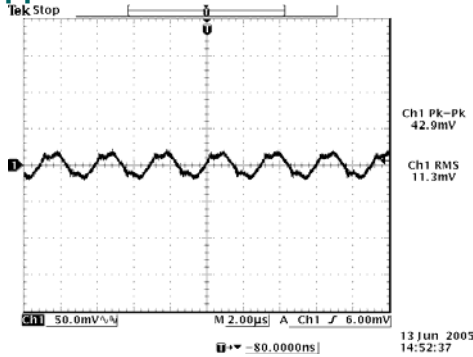


Ripple and noise at full load, 1.2 V/50 A output

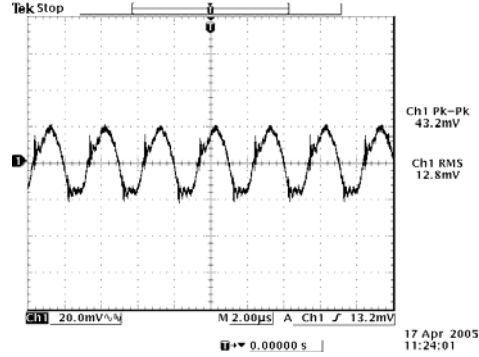


Ripple and noise at full load, 1.5 V/50 A output

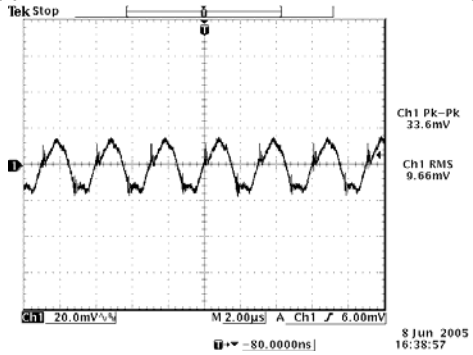


Ripple and noise at full load, 1.8 V/50 A output

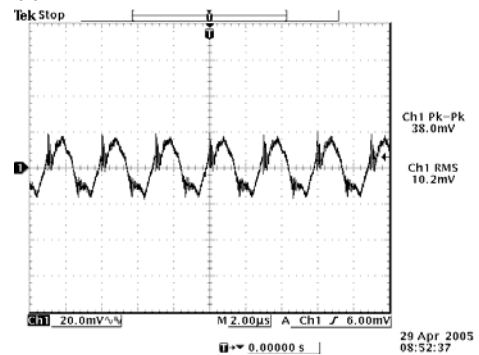


Ripple and noise at full load, 2.5 V/45 A output

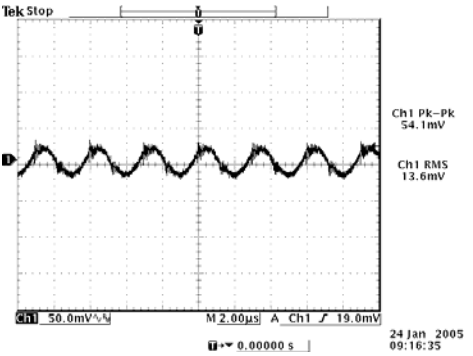

Ripple and noise at full load, 3.3 V/46 A output

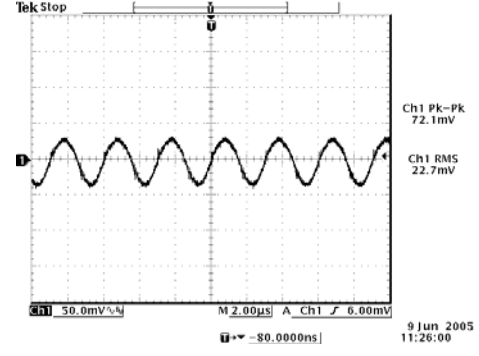

Ripple and noise at full load, 5.0 V/30 A output

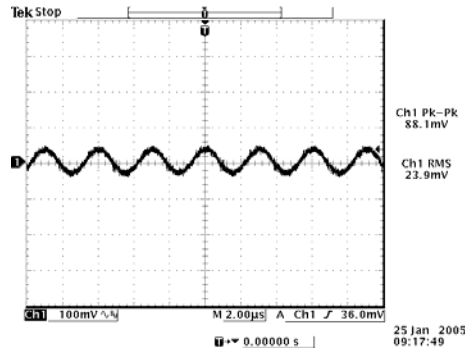

Ripple and noise at full load, 12 V/12 A output


**Note:** Ripple and noise is tested with a 1 µF ceramic cap and a 10 µF tantalum capat output, Ta=25 deg C.

# ISOLATED DC/DC CONVERTERS


48 Vdc Input 12 Vdc/12 A, 3.3 Vdc/46 A, 5 Vdc/30 A, 1.2-2.5 Vdc/50 A Outputs




## Transient Response Waveforms

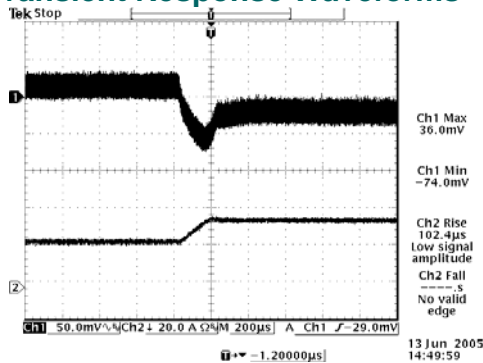


Vout= 1.2 V 50%-75% Load Transients

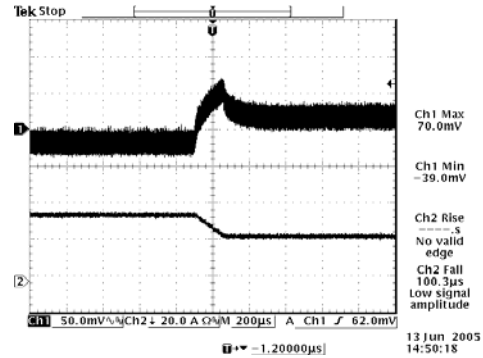


Vout= 1.2 V 75%-50% Load Transients

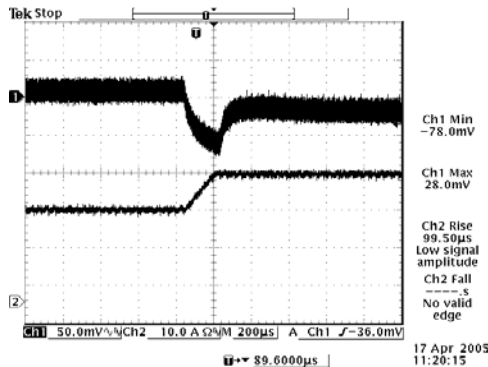


Vout= 1.5 V 50%-75% Load Transients

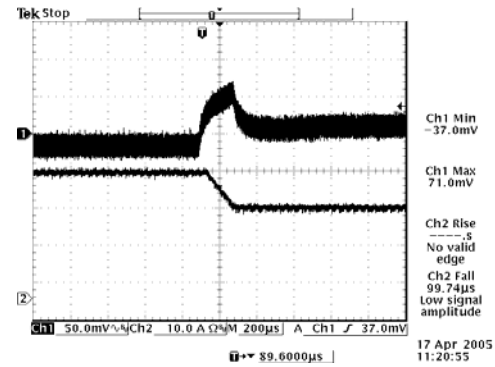


Vout= 1.5 V 75%-50% Load Transients

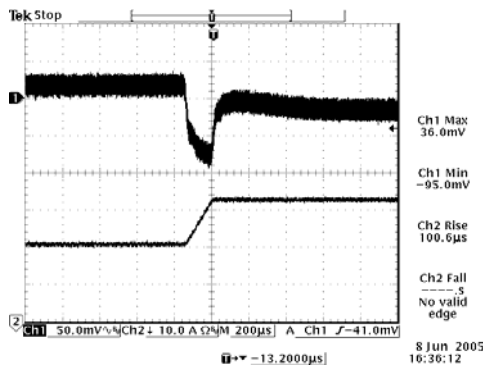


Vout= 1.8 V 50%-75% Load Transients

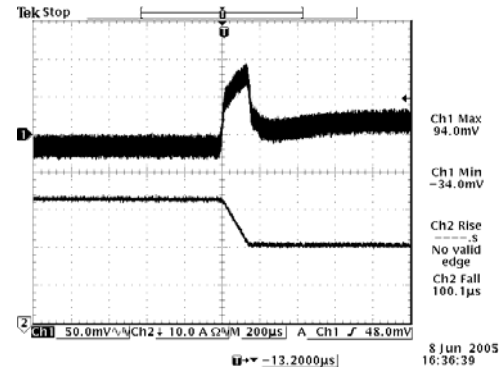

Vout= 1.8 V 75%-50% Load Transients

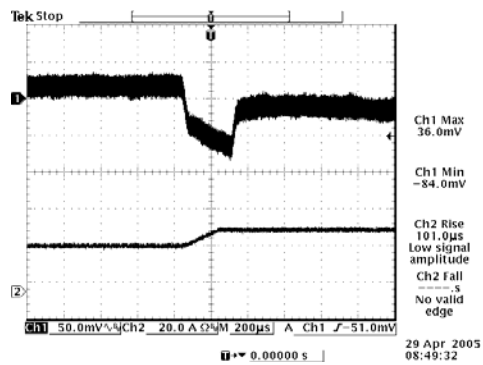

Vout= 2.5 V 50%-75% Load Transients

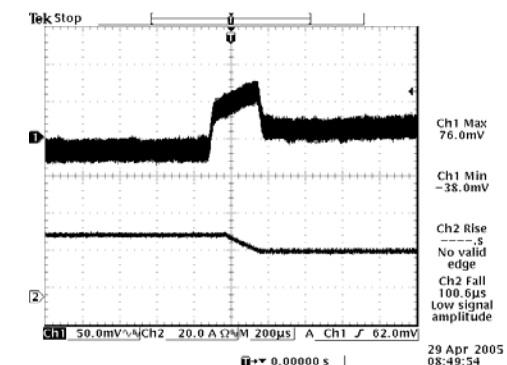


Vout= 2.5 V 75%-50% Load Transients

# ISOLATED DC/DC CONVERTERS


48 Vdc Input 12 Vdc/12 A, 3.3 Vdc/46 A, 5 Vdc/30 A, 1.2-2.5 Vdc/50 A Outputs




## Transient Response Waveforms (continued)

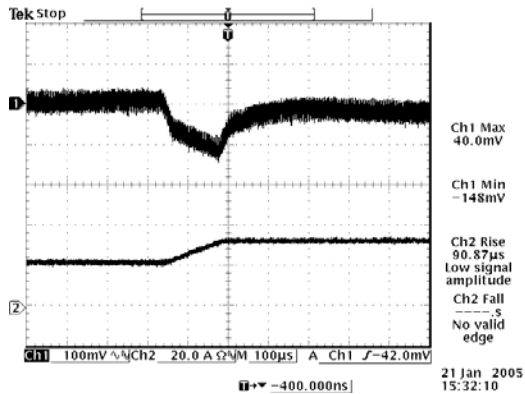


Vout= 3.3 V 50%-75% Load Transients

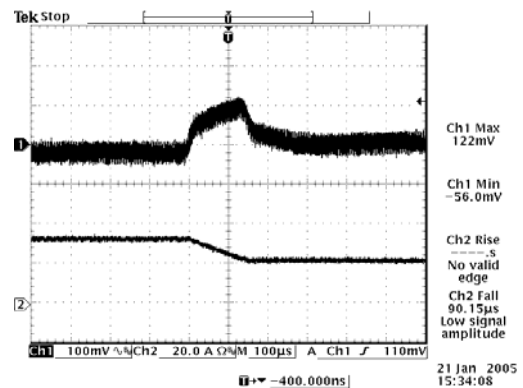


Vout= 3.3 V 75%-50% Load Transients

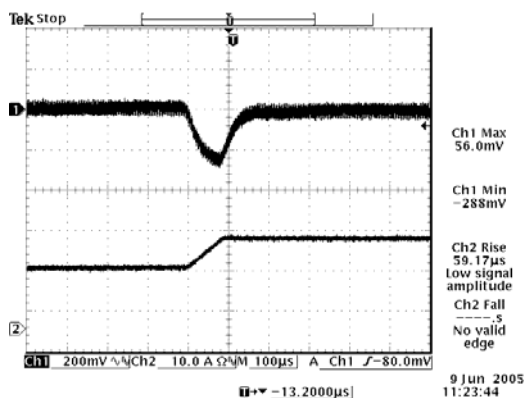


Vout= 5.0 V 50%-75% Load Transients

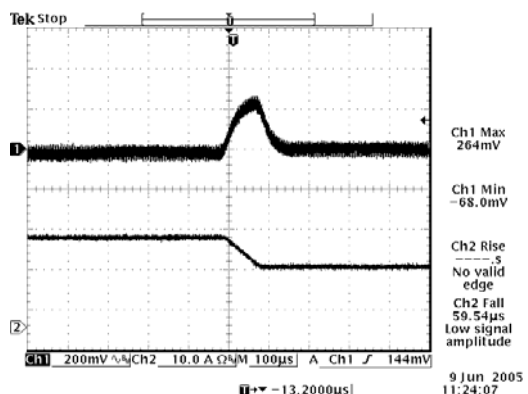

Vout= 5.0 V 75%-50% Load Transients

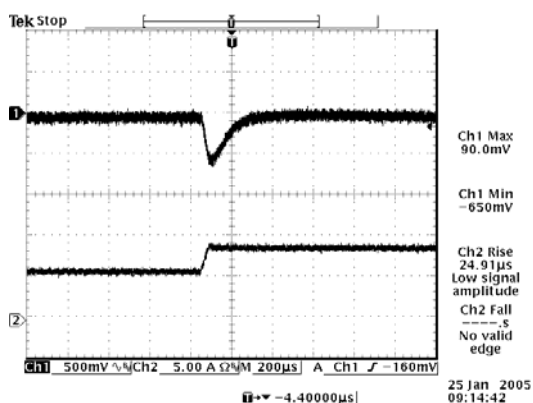

Vout= 12 V 50%-75% Load Transients

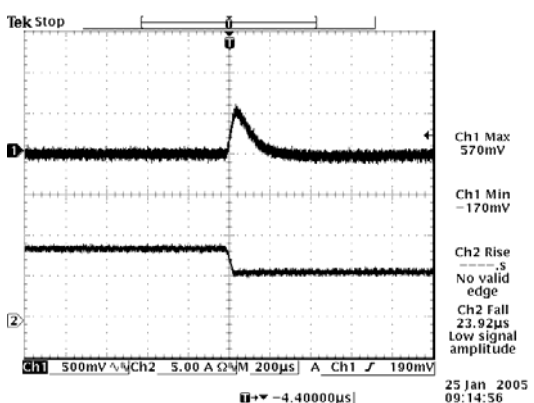

Vout= 12 V 75%-50% Load Transients



**Note:** Transient response at Vin=48 V, di/dt = 0.1 A/uS, with a 1 uF ceramic capacitor and a 10 uF Tantalum capacitor at the output, Ta=25 deg C.

# ISOLATED DC/DC CONVERTERS


48 Vdc Input 12 Vdc/12 A, 3.3 Vdc/46 A, 5 Vdc/30 A, 1.2-2.5 Vdc/50 A outputs




## Mechanical Outline

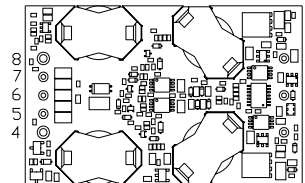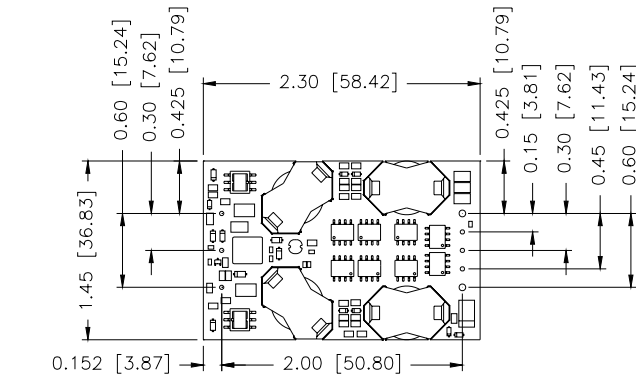


BOTTOM VIEW

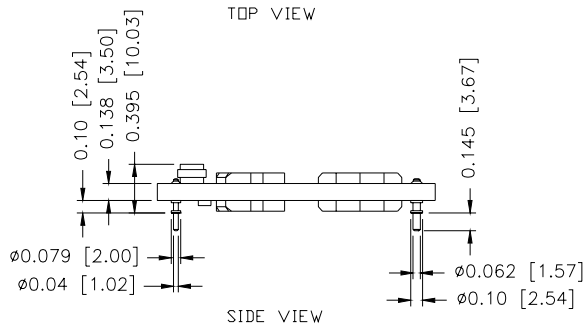

SIDE VIEW

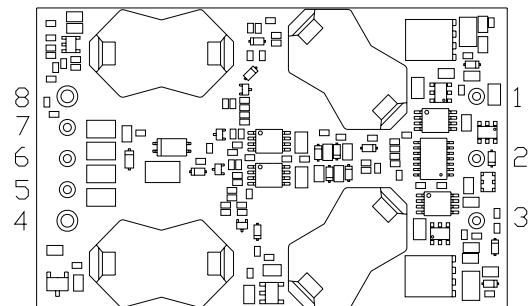

BOTTOM VIEW

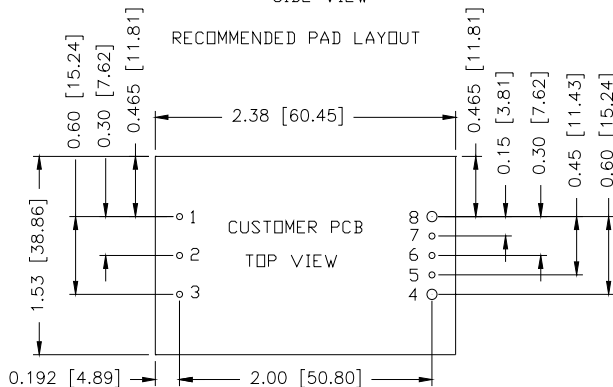

1,2,3,5,6,7  $\varnothing$ 0.047 HOLE SIZE,  $\varnothing$ 0.08 min PAD SIZE  
4,8  $\varnothing$ 0.07 HOLE SIZE,  $\varnothing$ 0.10 min PAD SIZE

## Pin Connections

| Pin | Function         | Pin Size |
|-----|------------------|----------|
| 1   | Vin (+)          | 0.04"    |
| 2   | Remote On/Off    | 0.04"    |
| 3   | Vin (-)          | 0.04"    |
| 4   | Vout (-)         | 0.062"   |
| 5   | Remote Sense (-) | 0.04"    |
| 6   | Trim             | 0.04"    |
| 7   | Remote Sense (+) | 0.04"    |
| 8   | Vout (+)         | 0.062"   |

## RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 030307

### CORPORATE

**Bel Fuse Inc.**  
206 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
[www.belfuse.com](http://www.belfuse.com)

### FAR EAST

**Bel Fuse Ltd.**  
8F/ 8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706  
[www.belfuse.com](http://www.belfuse.com)

### EUROPE

**Bel Fuse Europe Ltd.**  
Preston Technology Management Centre  
Marsh Lane, Suite G7, Preston  
Lancashire, PR1 8UD, U.K.  
Tel 44-1772-556601  
Fax 44-1772-888366  
[www.belfuse.com](http://www.belfuse.com)