

TOSHIBA SOLID STATE I/O INTERFACE MODULE


TF1107

DC INPUT MODULE

Unit in mm

TOSHIBA TF1107 is DC Line Voltage Input I/O Interface Module and it includes the optical isolator. Using this Module, you can design high reliability and compact system.

- Recommended Input Voltage : $V_{IN} = 12 \sim 24V$
- Input Impedance : $Z_{IN} = 3.1k\Omega$
- 1500V AC Optical Isolation
- Wide Supply Voltage : $V_{CC} = 5 \sim 18V$
- Including Delay Time Circuit
- Output is Compatible with TTL and CMOS Logic
- Small Size and Light Weight

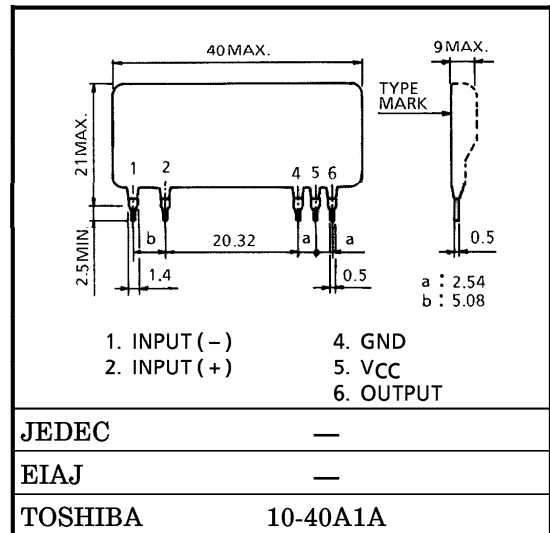

Weight : 7g


MAXIMUM RATINGS (Ta = 25°C)
INPUT (DC LINE VOLTAGE)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Input Voltage (DC)	V_{IN}	30	V
Input Current (DC)	I_{IN}	10	mA
Operating Frequency Range	f	65	Hz

OUTPUT (LOGIC CONTROL)

Logic Supply Voltage	V_{CC}	20	V
Output Voltage	V_{OUT}	$-0.5 \sim V_{CC} + 0.5$	V
Output Current	I_{OUT}	6	mA
Isolation Voltage (Input-Output) (AC)	BV_S / AC	1500 (1min)	V
Operating Temperature Range	T_{opr}	$-20 \sim 80$	°C
Storage Temperature Range	T_{stg}	$-20 \sim 80$	°C
Lead Soldering Temperature (10s)	T_{sol}	260	°C


MARK

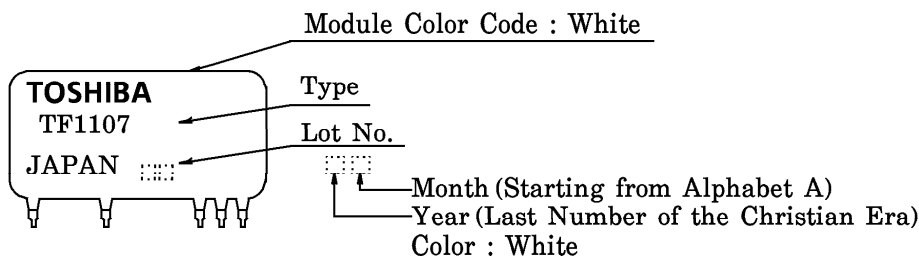

961001EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

BLOCK DIAGRAM

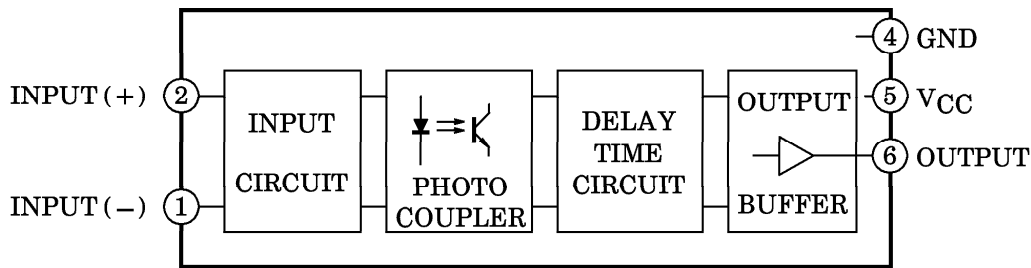

ELECTRICAL CHARACTERISTICS (Ta = 25°C, VCC = 5V)
 INPUT (DC LINE VOLTAGE)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Voltage	"H" Level	V _{ILH}	I _{OUT} < 1μA, V _{OUT} > 4.5V	—	7.8	12	V
	"L" Level	V _{IHL}	I _{OUT} < 1μA, V _{OUT} < 0.5V	5	7.5	—	
Input Current	"H" Level	I _{ILH}	I _{OUT} < 1μA, V _{OUT} > 4.5V	—	1.4	—	mA
	"L" Level	I _{IHL}	I _{OUT} < 1μA, V _{OUT} < 0.5V	—	1.3	—	
Input Impedance		Z _{IN}	V _{IN} = 24V	—	3.1	—	kΩ

OUTPUT (LOGIC CONTROL)

Output Voltage	"H" Level	V _{OH}	I _{OUT} = -10μA, V _{IN} = 24V	4.5	4.9	—	V
	"L" Level	V _{OL}	I _{OUT} = 2.5mA, V _{IN} = 0V	—	0.3	0.5	
Output Current (sink)		I _{OUT}	V _{OL} = 1.5V, V _{IN} = 0V	6	16	—	mA
Supply Current	"H" Level	I _{CCH}	I _{OUT} < 1μA, V _{IN} = 24V	—	1.0	5	mA
	"L" Level	I _{ACL}	I _{OUT} < 1μA, V _{IN} = 0V	—	1.4	6	
Propagation Delay Time	"H" Level	t _{pLH}	V _{IN} = 0 → 24V	—	4.2	8	ms
	"L" Level	t _{pHL}	V _{IN} = 24 → 0V	—	5.5	10	
Isolation Resistance		R _S	V = 1kV, R.H = 40~60%	—	10 ¹⁰	—	Ω

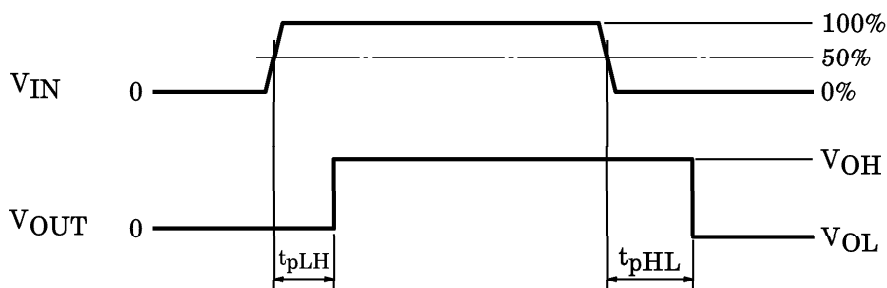


Fig.1 SWITCHING TIME TEST CONDITION

961001EBA2'

● The products described in this document are subject to foreign exchange and foreign trade control laws.
 ● The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
 ● The information contained herein is subject to change without notice.