

MN101C78A

Type	MN101C78A (under development)
ROM (×8-bit)	32 K
RAM (×8-bit)	1.5 K
Package	TQFP048-P-0707B *Lead-free (under development), QFP044-P-1010F *Lead-free (under planning)
Minimum Instruction Execution Time	0.1 μs (at 3.0 V to 3.6 V, 10 MHz) 0.235 μs (at 1.8 V to 3.6 V, 4.25 MHz) 62.5 μs (at 1.8 V to 3.6 V, 32 kHz)
Interrupts	• RESET • Watchdog • External 0 • External 1 • External 2 • External 4 (key interrupt dedicated) • Timer 0 • Timer 1 • Timer 2 • Timer 3 • Timer 6 • Time base • Timer 7 (2 systems) • Timer 8 (2 systems) • Serial 0 (2 systems) • Serial 1 (2 systems) • Serial 3, Serial 4 • A/D conversion finish
Timer Counter	<p>Timer counter 0 : 8-bit × 1 (square-wave/8-bit PWM output, event count, generation of remote control carrier, simple pulse width measurement, added pluse (2-bit) system PWM output, real time output control) (square-wave/PWM output to large current terminal P50 possible) Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Interrupt source coincidence with compare register 0</p> <p>Timer counter 1 : 8-bit × 1 (square-wave output, event count, synchronous output event) Clock source 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/64, 1/128 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Interrupt source coincidence with compare register 1</p> <p>Timer counter 0, 1 can be cascade-connected.</p> <p>Timer counter 2 : 8-bit × 1 (square-wave output, added pluse (2-bit) system PWM output, PWM output, serial transfer clock output, real time output control, event count, synchronous output event, simple pulse width measurement) (square-wave/PWM output to large current terminal P52 possible) Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Interrupt source coincidence with compare register 2</p> <p>Timer counter 3 : 8-bit × 1 (square-wave output, event count, generation of remote control carrier, serial transfer clock) Clock source 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/64, 1/128 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Interrupt source coincidence with compare register 3</p> <p>Timer counter 2, 3 can be cascade-connected.</p> <p>Timer counter 6 : 8-bit freerun timer Clock source 1/1 of system clock frequency; 1/1, 1/128, 1/8192 of OSC oscillation clock frequency; 1/1, 1/128, 1/8192 of XI oscillation clock frequency Interrupt source coincidence with compare register 6</p> <p>Timer counter 7 : 16-bit × 1 (square-wave output, 16-bit PWM output (cycle / duty continuous variable), event count, synchronous output event, pulse width measurement, input capture, real time output control, high performance IGBT output) (square-wave/PWM output to large current terminal P51 possible) Clock source 1/1, 1/2, 1/4, 1/16 of system clock frequency; 1/1, 1/2, 1/4, 1/16 of OSC oscillation clock frequency; 1/1, 1/2, 1/4, 1/16 of external clock input frequency Interrupt source coincidence with compare register 7 (2 lines), input capture register</p>

Timer Counter (Continue)

Timer counter 8: 16 bit × 1

(square-wave/16-bit PWM output [duty continuous variable], event count, pulse width measurement, input capture)
(square-wave/PWM output to large current terminal P53 possible)

Clock source 1/1, 1/2, 1/4, 1/16 of system clock frequency;
1/1, 1/2, 1/4, 1/16 of OSC oscillation clock frequency;
1/1, 1/2, 1/4, 1/16 of external clock input frequency

Interrupt source coincidence with compare register 8 (2 lines), input capture register

Timer counters 7, 8 can be cascade-connected.

(square-wave output, PWM input capture, pluse width measurement is possible as a 32-bit timer.)

Time base timer (one-minute count setting)

Clock source 1/1 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency
Interrupt source 1/128, 1/256, 1/512, 1/1024, 1/8192, 1/32768, of clock source frequency

Watchdog timer

Interrupt source 1/65536, 1/262144, 1/1048576 of system clock frequency

Serial Interface

Serial 0 : synchronous type/UART (full-duplex) × 1

Clock source 1/2, 1/4 of system clock frequency; pulse output of timer counter 1 or 2;
1/2, 1/4, 1/16, 1/64 of OSC oscillation clock frequency, external clock

Serial 1 : synchronous type/UART (full-duplex) × 1

Clock source 1/2, 1/4 of system clock frequency; pulse output of timer counter 1 or 2;
1/2, 1/4, 1/16, 1/64 of OSC oscillation clock frequency, external clock

Serial 3 : synchronous type/single-master I²C × 1

Clock source 1/2, 1/4 of system clock frequency; pulse output of timer counter 2 or 3;
1/2, 1/4, 1/16, 1/32 of OSC oscillation clock frequency, external clock

Serial 4 : I²C slave × 1

Applicable for I²C high-speed transfer mode, 7bit/10bit address setting, general call

I/O Pins

I/O

40
(35)

• Common use • Specified pull-up resistor available • Input/output selectable (bit unit)
(): QFP044-P-1010F

A/D Inputs

10-bit × 8-ch. (with S/H)

LCD

12 segments × 4 commons (static, 1/2, 1/3, or 1/4 duty)
(usable if VLCD ≤ VDD)

Special Ports

Buzzer output, remote control carrier signal output, high-current drive port


Electrical Characteristics

Supply current


Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operatingsupplycurrent	IDD1	fosc = 4 MHz, VDD = 3 V		1	2	mA
	IDD2	fx = 32 kHz, VDD = 3 V		4	15	μA
SupplycurrentatHALT	IDD3	fx = 32 kHz, VDD = 3 V, Ta = 25°C		2	10	μA
	IDD4	fx = 32 kHz, VDD = 3 V, Ta = -40°C to +85°C			40	μA
SupplycurrentatSTOP	IDD5	VDD = 3 V, Ta = 25°C			2	μA
	IDD6	VDD = 3 V, Ta = -40°C to +85°C			30	μA

See the next page for pin assignment and support tool.

Pin Assignment

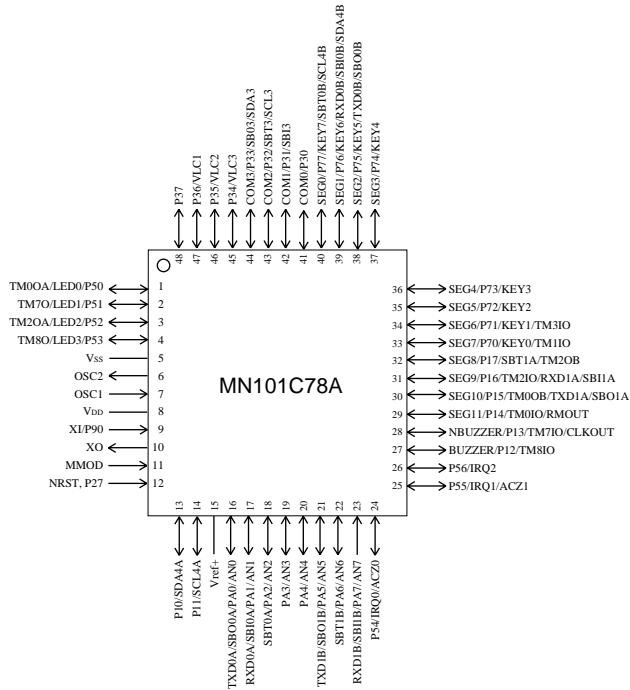

TQFP048-P-0707B *Lead-free (under development)

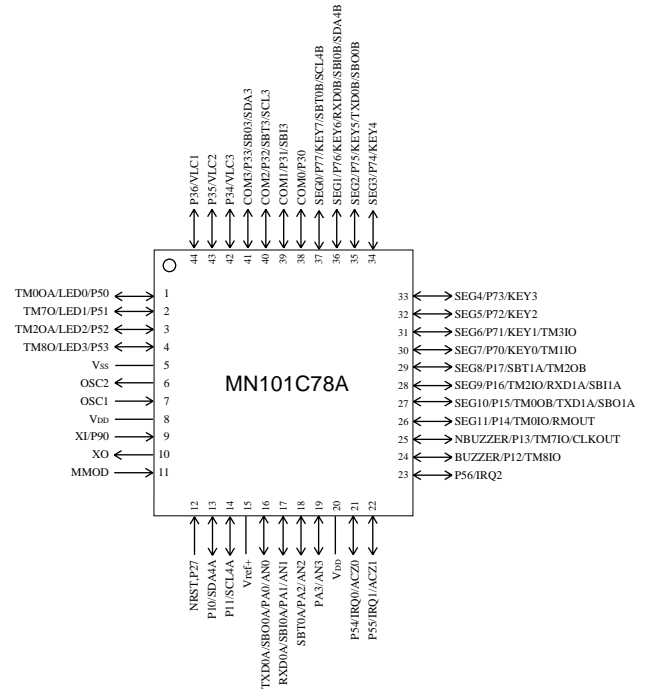

QFP044-P-1010F *Lead-free (under planning)

Support Tool

In-circuit Emulator

PX-ICE101C / D + PX-PRB101C78-TQFP048-P-0707B-M (under development)

PX-ICE101C / D + PX-PRB101C78-QFP044-P-1010F-M (under planning)

Flash Memory Built-in Type

Type	MN101CF78A (under development)
ROM (× 8-bit)	32 K
RAM (× 8-bit)	1.5 K
Minimum instruction execution time	0.1 μs (at 3.0 V to 3.6 V, 10 MHz) 0.235 μs (at 2.7 V to 3.6 V, 4 MHz) 62.5 μs (at 2.7 V to 3.6 V, 32 kHz)
Package	TQFP048-P-0707B *Lead-free (under development)

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this book and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this book is limited to showing representative characteristics and applied circuits examples of the products. It neither warrants non-infringement of intellectual property right or any other rights owned by our company or a third party, nor grants any license.
- (3) We are not liable for the infringement of rights owned by a third party arising out of the use of the product or technologies as described in this book.
- (4) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (5) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (6) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage, and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (7) When using products for which moisture-proof packaging is required, observe the conditions (including shelf life and amount of time let standing of unsealed items) agreed upon when specification sheets are individually exchanged.
- (8) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.

If you have any inquiries or questions about this book or our semiconductor products, please contact one of our sales offices listed on the back or semiconductor company's sales department.

Windows is a registered trademark of Microsoft Corporation.
MS-DOS is a registered trademark of Microsoft Corporation.
Sun and Solaris are registered trademarks of Sun Microsystems, Inc.
PC-9801 is a registered trademark of NEC.
PC/AT is a registered trademark of International Business Machines Corporation.
TRON is an abbreviation of "The Real-time Operating system Nucleus."
ITRON is an abbreviation of "Industrial TRON."
 μ ITRON is an abbreviation of "Micro Industrial TRON."
TRON, ITRON, and μ ITRON do not refer to any specific product or products.
Other company names and product names are registered trademarks.