


LOW NOISE AMPLIFIER APPLICATION.

### FEATURES

- Excellent  $h_{FE}$  Linearity
  - :  $h_{FE}(2)=100(\text{Typ.})$  at  $V_{CE}=6V$ ,  $I_C=150mA$
  - :  $h_{FE}(I_C=0.1mA)/h_{FE}(I_C=2mA)=0.95(\text{Typ.})$ .
- Low Noise :  $NF=0.2dB(\text{Typ.})$ .  $f=1kHz$ .
- Complementary to KTA1266L. (O,Y,GR class)

### MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	60	V
Collector-Emitter Voltage	$V_{CEO}$	50	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	150	mA
Emitter Current	$I_E$	-150	mA
Collector Power Dissipation	$P_C$	625	mW
Junction Temperature	$T_j$	150	°C
Storage Temperature Range	$T_{stg}$	-55 ~ 150	°C

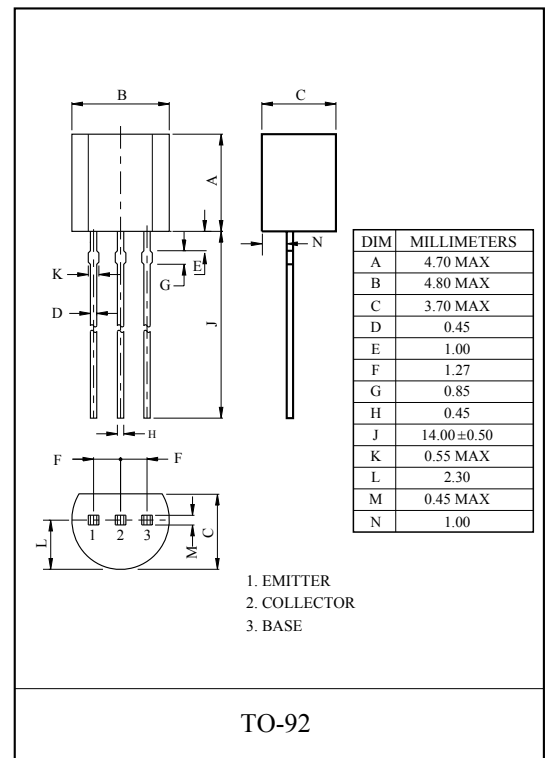

### ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=60V$ , $I_E=0$	-	-	0.1	$\mu A$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=5V$ , $I_C=0$	-	-	0.1	$\mu A$
DC Current Gain	$h_{FE}(1)$ (Note)	$V_{CE}=6V$ , $I_C=2mA$	70	-	700	
	$h_{FE}(2)$	$V_{CE}=6V$ , $I_C=150mA$	25	100	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100mA$ , $I_B=10mA$	-	0.1	0.25	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=100mA$ , $I_B=10mA$	-	-	1.0	V
Transition Frequency	$f_T$	$V_{CE}=10V$ , $I_C=1mA$	80	-	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10V$ , $I_E=0$ , $f=1MHz$	-	2.0	3.0	pF
Base Intrinsic Resistance	$r_{bb'}$	$V_{CB}=10V$ , $I_E=1mA$ , $f=30MHz$	-	50	-	$\Omega$
Noise Figure	NF(1)	$V_{CE}=6V$ , $I_C=0.1mA$ , $f=100Hz$ , $R_g=10k\Omega$	-	0.5	6.0	dB
	NF(2)	$V_{CE}=6V$ , $I_C=0.1mA$ , $f=1kHz$ , $R_g=10k\Omega$	-	0.2	3.0	

Note :  $h_{FE}(1)$  Classification O:70 ~ 140, Y:120 ~ 240, GR:200 ~ 400, BL:300 ~ 700