



EES-5610

Intel® Pentium® III / Celeron® Mini PC



Features

- Supports Intel® Pentium® III / Celeron® CPU
- VIA VT82C694X Chipset
- 6 x LED for PWR, HDD, LAN
- External DVI Interface
- AC97 Audio
- Dual Intel® 82559ER 10/100Mbps LAN
- Type I/II CF
- 4 COM, 2 USB 1.1
- Aluminum Alloy Chassis with Detachable Power Supply

DVI

2 LAN

4 COM

Specifications

System

• CPU	Supports Intel® Pentium® III / Celeron® & VIA C3
• BIOS	Award 256 KB Flash BIOS
• System Chipset	VIA Apollo Pro 133A VT82C694X/VT82C686B
• I/O Chip	VIA VT82C686B/Winbond W83977EF-AW
• System Memory	One 168-pin DIMM socket supports up to 512 MB SDRAM
• SSD	One CompactFlash Type I/II socket
• Watchdog Timer	Reset/IRQx; 32 sec.~254 min. and 1 min./step
• Display	SMI Lynx3DM SM721 2D/3D graphics accelerator with embedded 4 MB SGRAM
• Audio	AC97 Audio
• Ethernet	Dual Intel® 82559ER 10/100Base-Tx Fast Ethernet controllers
• System Indicators	6 LED indicators show the power, HDD, and LAN status
• HDD	Mounting kit for one 2.5" HDD

External I/O


• COM Port	3 x RS-232, 1 x RS-232/422/485
• LAN Port	2 x RJ-45
• VGA/LCD Port	1 x DB-15 / 24-pin DVI
• Audio Port	Mic-in, Line-in, Line-out
• USB Port	2 x USB 1.1 ports
• Parallel Port	1 x DB-25
• Mouse & KB	2 x PS/2 mini DIN

Power Supply Unit

• Power Input	90 ~ 264 Vac / 47 ~ 63 Hz
• Power Output	+5 Vdc @ 13 A; +12 Vdc @ 3 A; -12 Vdc @ 0.5 A

Mechanical & Environmental

• Operating Temperature	0 to 40°C (32~104°F)
• Storage Temperature	-20 to +75°C (-4~167°F)
• Relative Humidity	5 to 90% @ 40°C (104°F), relative humidity, noncondensing
• Dimensions (W x H x D)	12.7" x 2.66" x 8.74" (322 mm x 67.5 mm x 222 mm)
• Weight	7.48 lbs (3.4 Kgs)
• Mounting	Desktop

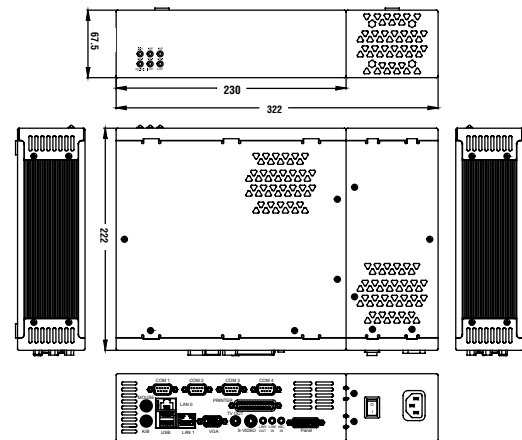

Unit: mm

Ordering Information

- **EES-5610**
Intel® Pentium® III / Celeron® Mini PC with VGA, Audio, Dual LAN, CF, 4 COM, & 2 USB 1.1
- **EES-5610L**
Same as above, but with Single LAN
- **ACC-CFC-xx**
CompactFlash Card Series (xx = Capacity, Capacity Option: 8, 16, 32, 64, 128, 256, 512 MB)