# I/Q Mixer / Modulator

## **Model MIQ6xSMD-1**

#### **Communications Band**

### RF 5.5 to 13.5 GHz

#### Electrical Specifications:<sup>(1)</sup>

	Conditions			Specifications			] Mo
Parameter	RF (GHz)	LO (GHz)	IF (MHz)	Min	Typical	Max	
SSB Conversion	7.0-12.7	7.0-12.7	DC-500		5.0 dB	6.5 dB	]
loss: <sup>(2) (3)</sup>	5.5-13.5	5.5-13.5	DC-500		5.3 dB	7.0 dB	
Image Rejection Side-	9.5-12.7	9.5-12.7	DC-500	20 dB	28 dB		]
band Suppression: (4)	5.5-13.5	5.5-13.5	DC-500	16 dB	25 dB		
Amplitude Match	5.5-13.5	5.5-13.5	DC-500		0.2 dB		1
Phase Match	5.5-13.5	5.5-13.5	DC-500		5 deg		1
Isolation							1
LO to RF:		5.5-13.5		20 dB	25 dB		
LO to I/Q:		5.5-13.5		25 dB	35 dB		
RF to I/Q:	5.5-13.5				28 dB		
I/Q to RF:			DC-500		40 dB		
Input 1 dB	5.5-13.5	5.5-13.5	DC-500		+5 dBm	MIQ64	1
Compression Point:					+8 dBm	MIQ66	
-					+12 dBm	MIQ67	
Input Third Order	5.5-13.5	5.5-13.5	DC-500		+14 dBm	MIQ64	]
Intercept Point:					+17 dBm	MIQ66	
-					+21 dBm	MIQ67	
LO Power: <sup>(5)</sup>	5.5-13.5	5.5-13.5	DC-500		+10 dBm	MIQ64	]
					+13 dBm	MIQ66	
					+17 dBm	MIQ67	

odel MIQ6xSMD-1

LO Power - 4 = +10 dBm

6 = +13 dBm 7 = +17 dBm

Notes:

1. Specifications are guaranteed when tested as a downconverter in a 50 Ohm system at +25°C with the


nominal LO power. Specifications indicated as typical are not guaranteed. 2. Noise figure is typically within ±0.5 dB of conversion loss for IF frequencies greater than 10 MHz.

Conversion loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C. Conversion 3. loss is the combined value.

4. Measured with an IF guadrature hybrid whose amplitude and phase errors are 0.5 dB and 3 degrees maximum. An IF quadrature hybrid is not included.

5. Usable LO drives are up to 2 dB below to 3 dB above nominal

6. See Application notes M112, for aid in selecting the outline and for mounting and installation information.

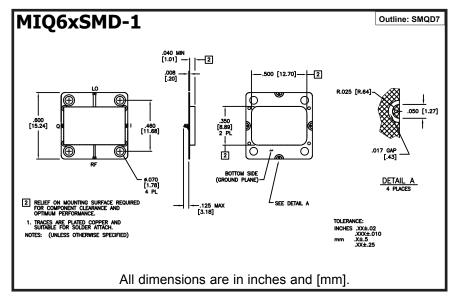



5

6

8

9

1.0

1.5

2.0

3.0

1.0

1.5


20

3.0

+0.5

0.0

-0.5

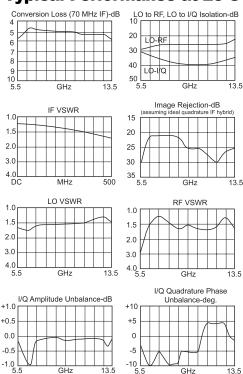



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, FL 32905 · PH (888) 553-7531 · Fax (888) 553-7532 **REV A** 5/7/10 www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, PA 19154 · PH (215) 464-4000 · Fax (215) 464-4001