


# Xinger®

## Ultra Low Profile 0805 Balun 75Ω to 75Ω Balanced

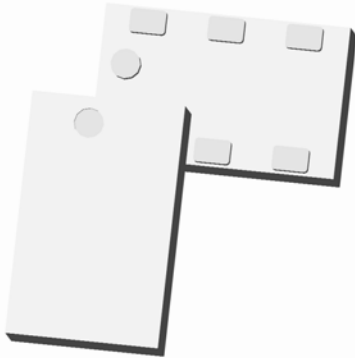

### Description

The B0922J7575A00 is a low cost, low profile sub-miniature unbalanced to balanced transformer designed for differential inputs and output locations on modern chipsets in an easy to use surface mount package covering dual polarized commercial Satellite bands 950 MHz – 1450 MHz & 1650 MHz – 2150 MHz. The B0922J7575A00 is ideal for high volume manufacturing and delivers higher performance than traditional wire wound baluns. The B0922J7575A00 has an unbalanced port impedance of 75Ω and a 75Ω balanced port impedance\*. This transformation enables single ended signals to be applied to differential ports on modern integrated chipsets. The output ports have equal amplitude (-3dB) with 180 degree phase differential. The B0922J7575A00 is available on tape and reel for pick and place high volume manufacturing.

### Detailed Electrical Specifications: Specifications subject to change without notice.

Features:	Parameter	ROOM (25°C)			Unit
		Min.	Typ.	Max	
<ul style="list-style-type: none"> <li>• 950 – 2150 MHz</li> <li>• 0.7mm Height Profile</li> <li>• 75 Ohm to 2 x 37.5 Ohm</li> <li>• Low Insertion Loss</li> <li>• Sat LNB Chipset Compliant</li> <li>• Input to Output DC Isolation</li> <li>• Surface Mountable</li> <li>• Tape &amp; Reel</li> <li>• Non-conductive Surface</li> <li>• RoHS Compliant</li> </ul>	Frequency	950		2150	MHz
	Unbalanced Port Impedance		75		Ω
	Balanced Port Impedance		75		Ω
	Return Loss	7.9	9.6		dB
	Insertion Loss*		0.8	1.2	dB
	Amplitude Balance		0.4	1.4	dB
	Phase Balance		3	9	Degrees
	CMRR		26		dB
	Power Handling			2	Watts
	Operating Temperature	-55		+85	°C

\* Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85 °C)

### Outline Drawing

Top View (Near-side)

Orientation Marker Denotes Pin Location

Side View

Bottom View (Far-side)

Orientation Marker Denotes Pin Location






Pin	Designation
1	GND
2	Unbalanced Port
3	GND
4	Balanced Port
5	NC
6	Balanced Port

Tolerances are Non-Cumulative

Dimensions are in Inches [Millimeters]  
Mechanical Outline



## Typical Performance: 800 MHz. to 2400 MHz.

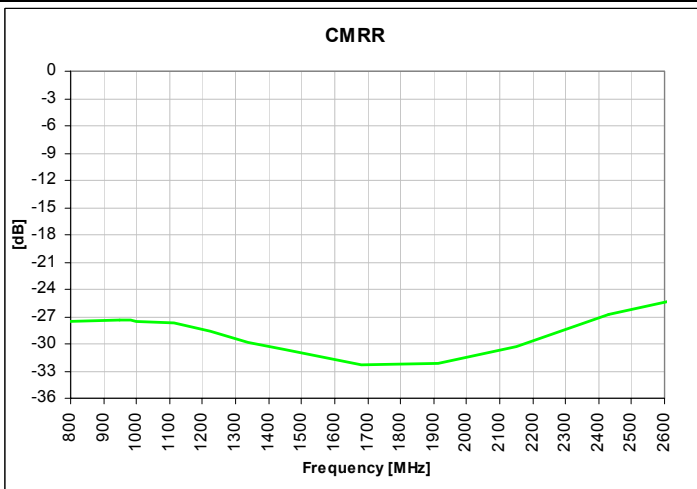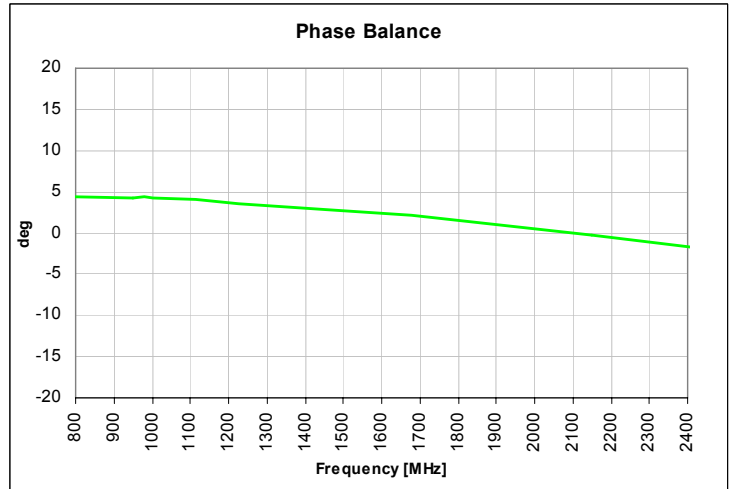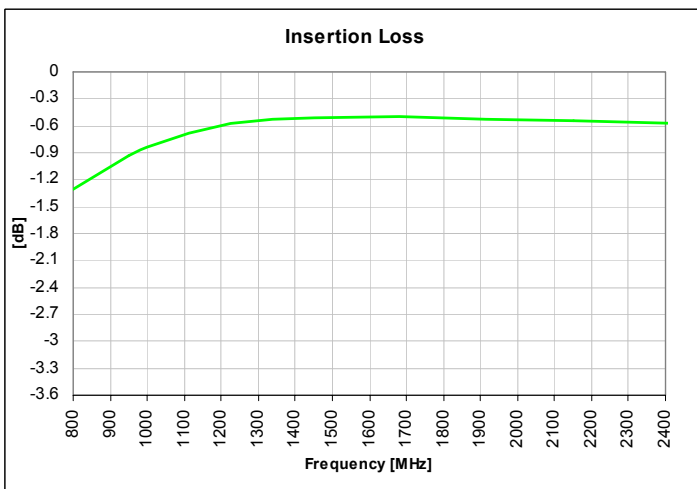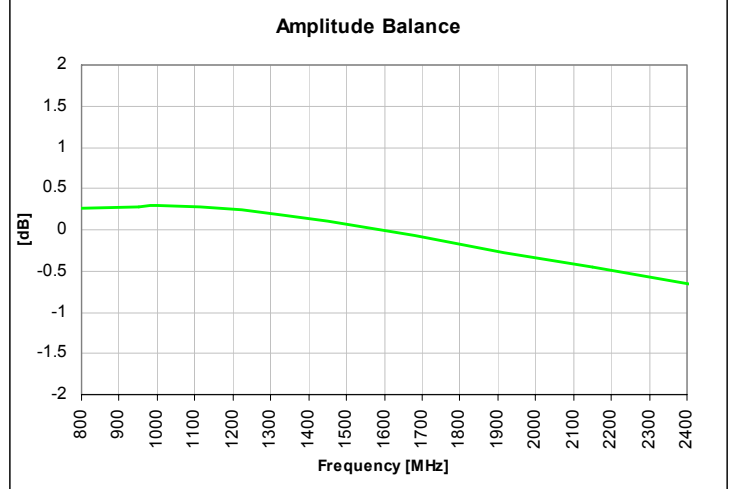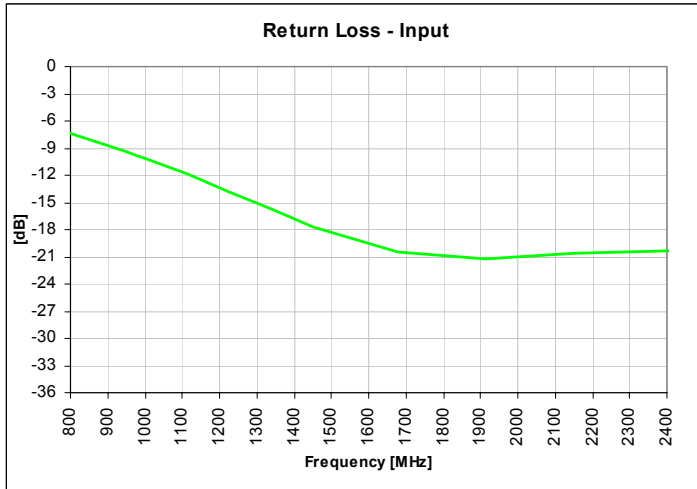


### Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

All of the Xinger components are constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability having X and Y thermal coefficient of expansion (CTE) of 17 ppm/°C.

An example of the PCB footprint used in the testing of these parts is shown below. An example of a DC-biased footprint is also shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.

### Mounting Footprint


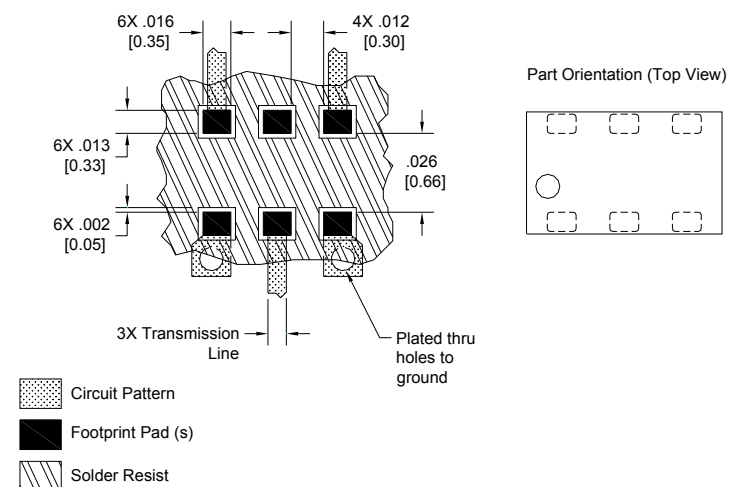


Dimensions are in Inches [Millimeters]  
Mounting Footprint




## Packaging and Ordering Information

Parts are available in reel and are packaged per EIA 481-2. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel. See Model Numbers below for further ordering information.

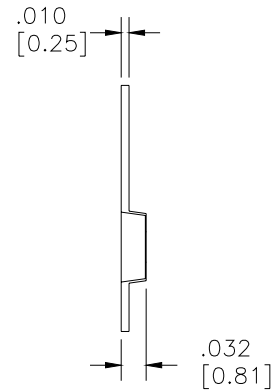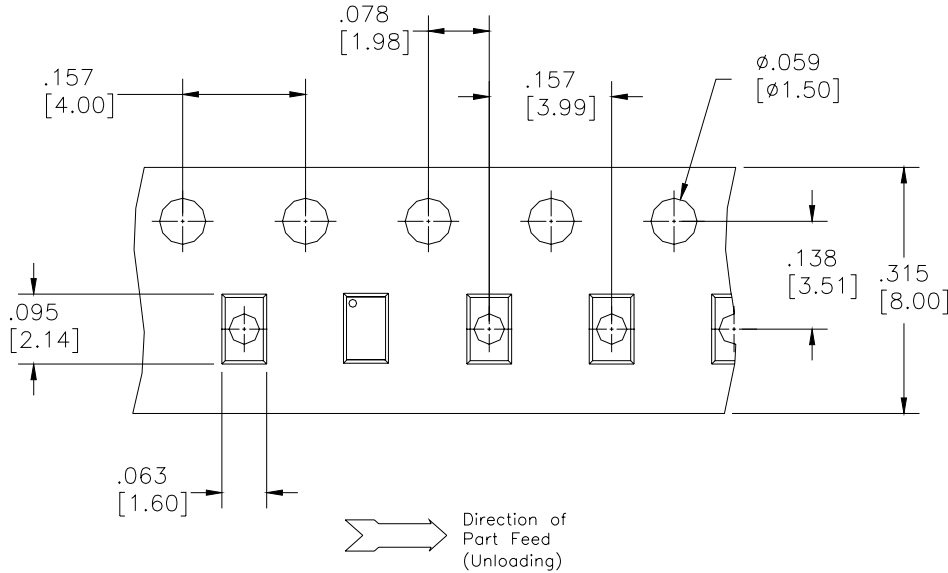

Dimensions are in inches [mm]

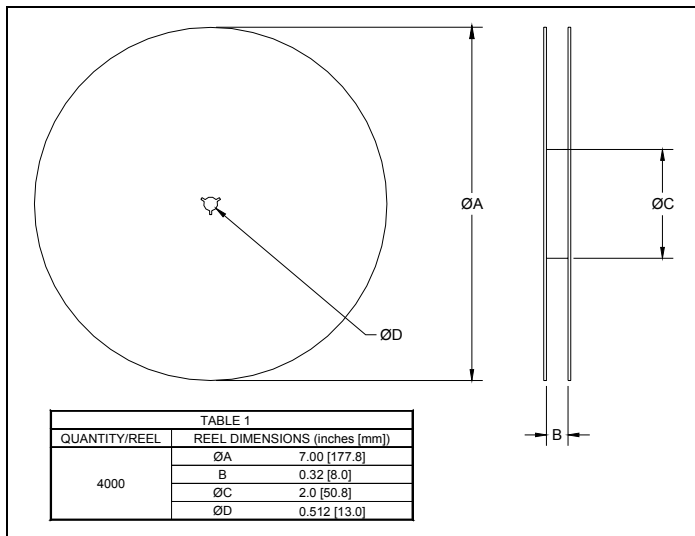

USA/Canada: (315) 432-8909  
 Toll Free: (800) 411-6596  
 Europe: +44 2392-232392

Available on Tape and Reel for Pick and Place Manufacturing.



# Anaren

What'll we think of next?™

# BD 2425 J 50 100 A 00

Function	Frequency	Package Dimensions	Unbalanced Impedance	Balanced Impedance + Coupling	Plating Finish	Codes
<b>B = Balun</b> <b>BD = Balun + DC</b> <b>F = Filter</b> <b>FB = Filter / Balun</b> <b>C = 3dB Coupler</b> <b>DC = Directional</b> <b>J = RF Jumper</b> <b>X = RF cross over</b>	<b>0110 = 100 – 1000 MHz</b> <b>0810 = 800 – 1000 MHz</b> <b>0922 = 950 – 2150 MHz</b> <b>0826 = 800 – 6200 MHz</b> <b>1222 = 1200 – 2200 MHz</b> <b>1416 = 1400 – 1600 MHz</b> <b>1722 = 1700 – 2200 MHz</b> <b>2326 = 2300 – 2600 MHz</b> <b>2425 = 2400 – 2500 MHz</b> <b>3150 = 3100 – 5000 MHz</b> <b>3436 = 3400 – 3600 MHz</b> <b>4859 = 4800 – 5900MHz</b> <b>5153 = 5100 – 5300 MHz</b> <b>5159 = 5100 – 5900 MHz</b> <b>5759 = 5700 – 5900 MHz</b>	<b>A = 150 x 150 mils</b> <small>(4mm x 4mm)</small> <b>C = 120 x 120 mils</b> <small>(3mm x 3mm)</small> <b>E = 100 x 80 mils</b> <small>(2.5mm x 2mm)</small> <b>J = 80 x 50 mils</b> <small>(2mm x 1.25mm)</small> <b>L = 60 x 30 mils</b> <small>(1.5mm x 0.75mm)</small> <b>N = 40 x 40 mils</b> <small>(1mm x 1mm)</small>	<b>50 = 50 Ohm</b> <b>75 = 75 Ohm</b>	<b>25 = 25 Ω Balanced</b> <b>30 = 30 Ω Balanced</b> <b>50 = 50 Ω Balanced</b> <b>75 = 75 Ω Balanced</b> <b>100 = 100 Ω Balanced</b> <b>150 = 150 Ω Balanced</b> <b>200 = 200 Ω Balanced</b> <b>300 = 300 Ω Balanced</b> <b>400 = 400 Ω Balanced</b> <b>03 = 3dB Hybrid</b> <b>10 = 10dB Directional</b> <b>20 = 20dB Directional</b>	<b>A = Gold</b> <b>P = Tin-Lead</b>	

