

# TOTAL POWER INT'L

## MIW1200 Series

**2 ~ 3 Watts 2:1 Wide Input Range DC/DC Converters**

### Key Features


- High Efficiency up to 86%
- 2:1 Input Range
- I/O Isolation 1500VDC
- Industry Standard Pinout
- SMT Technology
- Short Circuit Protection
- EMI Complies With EN55022 Class A
- MTBF > 1,000,000 Hours




MIW1200-Series power modules are low-profile dc-dc converters that operate over input voltage ranges of 9-18VDC, 18-36VDC and 36-75VDC and provide precisely regulated output voltages of 5V, 12V, 15V,  $\pm 12V$  and  $\pm 15V$ .

The  $-25^{\circ}\text{C}$  to  $+71^{\circ}\text{C}$  operating temperature range makes it ideal for data communication equipments, mobile battery driven equipments, distributed power systems, telecommunication equipments, mixed analog/digital subsystems, process/machine control equipments, computer peripheral systems and industrial robot systems.

The modules have a maximum power rating of 3W and a typical full-load efficiency of 86%, continuous short circuit, 60mA output ripple, EN55022 level A conducted noise compliance minimize design-in time, cost and eliminate the need for external components.




Low Cost



I/O Isolation




EN55022




Wide Range

### Block Diagram

#### Single Output

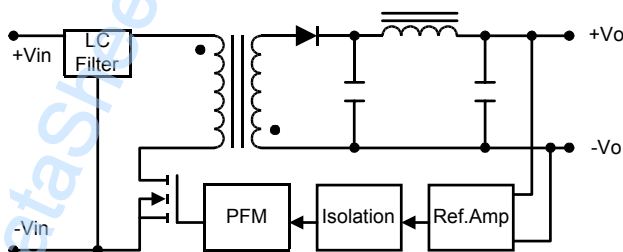

#### Dual Output

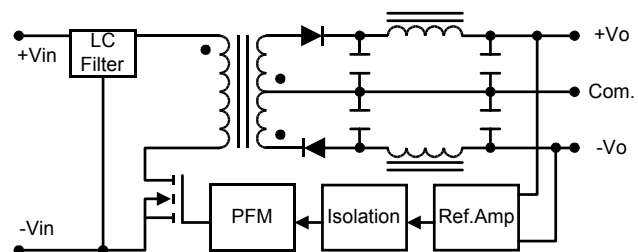

**Model Selection Guide**

Model Number	Input Voltage	Output Voltage	Output Current		Input Current		Reflected Ripple Current	Efficiency
			Max.	Min.	@Max. Load	@No Load		@Max. Load
	VDC	VDC	mA	mA	mA (Typ.)	mA (Typ.)	mA (Typ.)	% (Typ.)
MIW1221	12 (9 ~ 18)	3.3	600	60	220	30	15	75
MIW1222		5	500	50	267			78
MIW1223		12	250	25	305			82
MIW1224		15	200	20	309			81
MIW1225		±5	±250	±25	274			76
MIW1226		±12	±125	±12.5	313			80
MIW1227		±15	±100	±10	321			78
MIW1231	24 (18 ~ 36)	3.3	600	60	109	8	15	76
MIW1232		5	500	50	130			80
MIW1233		12	250	25	150			83
MIW1234		15	200	20	149			84
MIW1235		±5	±250	±25	134			78
MIW1236		±12	±125	±12.5	152			82
MIW1237		±15	±100	±10	152			82
MIW1241	48 (36 ~ 75)	3.3	600	60	53	4	15	78
MIW1242		5	500	50	64			82
MIW1243		12	250	25	74			85
MIW1244		15	200	20	73			86
MIW1245		±5	±250	±25	65			80
MIW1246		±12	±125	±12.5	74			84
MIW1247		±15	±100	±10	75			83

**Absolute Maximum Ratings**

Parameter	Min.	Max.	Unit	
Input Surge Voltage (1000 mS)	12VDC Input Models	-0.7	25	VDC
	24VDC Input Models	-0.7	50	VDC
	48VDC Input Models	-0.7	100	VDC
Lead Temperature (1.5mm from case for 10 Sec.)	---	260	°C	
Internal Power Dissipation	---	2,500	mW	

Exceeding these values can damage the module. These are not continuous operating ratings.

**Environmental Specifications**

Parameter	Conditions	Min.	Max.	Unit
Operating Temperature	Ambient	-25	+71	°C
Operating Temperature	Case	-40	+90	°C
Storage Temperature		-40	+125	°C
Humidity		---	95	%
Cooling	Free-Air Convection			
Conducted EMI	EN55022 Class A			

**Note :**

- Specifications typical at Ta=+25°C, resistive load, nominal input voltage, rated output current unless otherwise noted.
- Transient recovery time is measured to within 1% error band for a step change in output load of 50% to 100%.
- Ripple & Noise measurement bandwidth is 0-20 MHz.
- These power converters require a minimum output loading to maintain specified regulation.
- Operation under no-load conditions will not damage these devices; however they may not meet all listed specifications.
- All DC/DC converters should be externally fused at the front end for protection.
- Other input and output voltage may be available, please contact factory.
- Specifications subject to change without notice.

# MIW1200 Series

## Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Start Voltage	12V Input Models	4.5	7	9	VDC
	24V Input Models	8	12	18	
	48V Input Models	16	24	36	
Under Voltage Shutdown	12V Input Models	---	6.5	8.5	
	24V Input Models	---	11	17	
	48V Input Models	---	22	34	
Reverse Polarity Input Current	All Models	---	---	1	A
Short Circuit Input Power		---	1000	2000	mW
Input Filter		Pi Filter			

## Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	$\pm 0.5$	$\pm 1.0$	%
Output Voltage Balance	Dual Output Balance Load	---	$\pm 0.5$	$\pm 2.0$	%
Line Regulation	$V_{in} = \text{Min. to Max.}$	---	$\pm 0.2$	$\pm 0.5$	%
Load Regulation	$I_o = 10\% \text{ to } 100\%$	---	$\pm 0.2$	$\pm 0.5$	%
Ripple & Noise (20MHz)		---	25	50	mV P-P
Ripple & Noise (20MHz)	Over Line, Load & Temp	---	---	75	mV P-P
Ripple & Noise (20MHz)		---	---	15	mV rms.
Over Power Protection		120	---	---	%
Transient Recovery Time	50% Load Step Change	---	300	500	$\mu\text{s}$
Transient Response Deviation		---	$\pm 3$	$\pm 6$	%
Temperature Coefficient		---	$\pm 0.01$	$\pm 0.02$	%/°C
Output Short Circuit	Continuous				

## General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	60 Seconds	1500	---	---	VDC
Isolation Test Voltage	Flash Tested for 1 Second	1650	---	---	VDC
Isolation Resistance	500VDC	1000	---	---	M $\Omega$
Isolation Capacitance	100KHz, 1V	---	350	500	pF
Switching Frequency		200	300	450	KHz
MTBF	MIL-HDBK-217F @ 25°C, Ground Benign	1000	---	---	K Hours

## Capacitive Load

Models by Vout	3.3V	5V	12V	15V	$\pm 5V$ #	$\pm 12V$ #	$\pm 15V$ #	Unit
Maximum Capacitive Load	4000	4000	4000	4000	1000	1000	1000	$\mu\text{F}$


Note: # For each output.

# MIW1200 Series


## Input Fuse Selection Guide

12V Input Models	24V Input Models	48V Input Models
700mA Slow – Blow Type	350mA Slow – Blow Type	135mA Slow – Blow Type


## Input Voltage Transient Rating

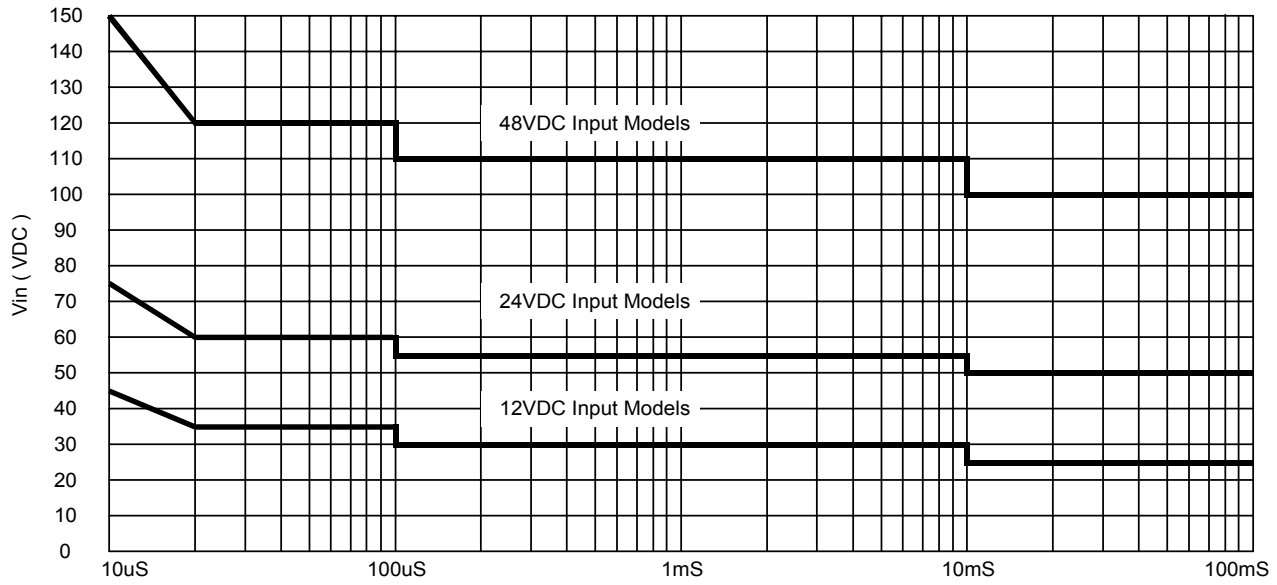


# MIW1200 Series

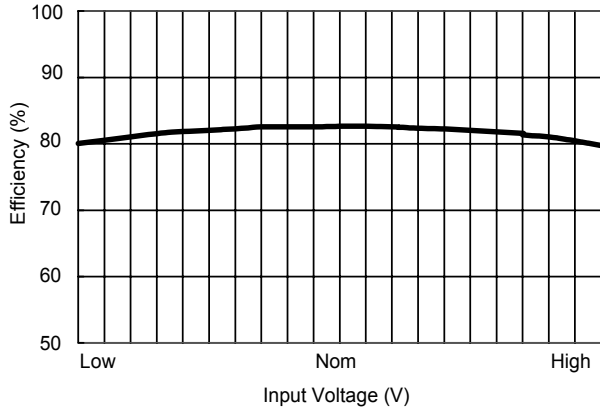


**Efficiency vs Input Voltage ( Single Output )**

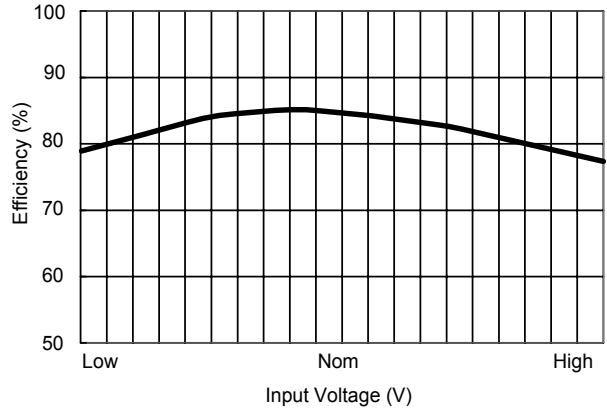


**Efficiency vs Input Voltage ( Dual Output )**

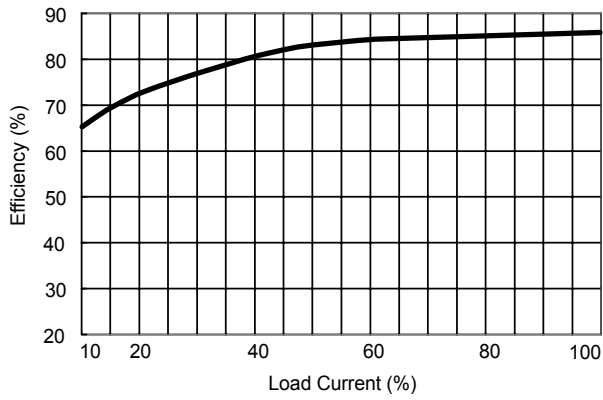

**Efficiency vs Output Load ( Single Output )**

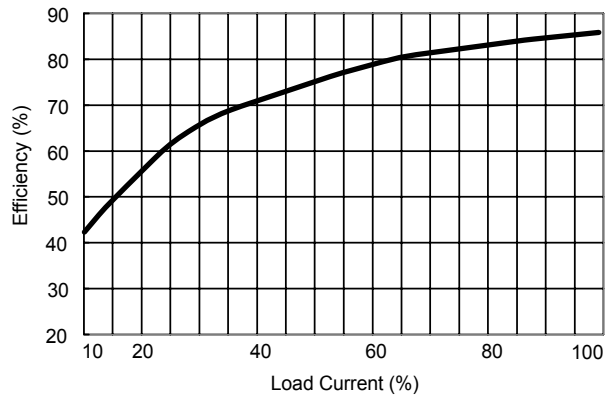

**Efficiency vs Output Load ( Dual Output )**

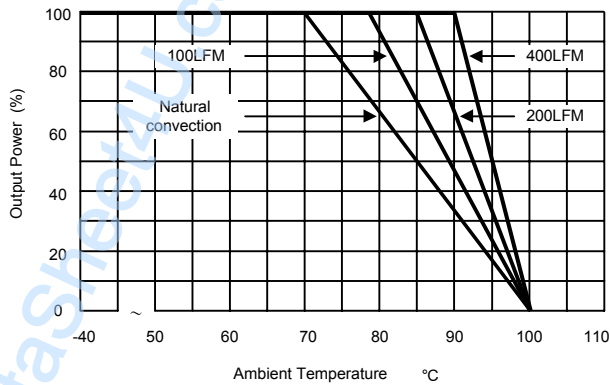


**Derating Curve**

www.DataSheet4U.com

## Test Configurations

### Input Reflected-Ripple Current Test Setup

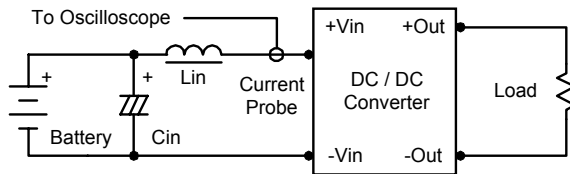

Input reflected-ripple current is measured with an inductor  $L_{in}$  (4.7uH) and  $C_{in}$  (220uF, ESR < 1.0Ω at 100 KHz) to simulate source impedance.



Capacitor  $C_{in}$ , offsets possible battery impedance.

Current ripple is measured at the input terminals of the module, measurement bandwidth is 0–500 KHz.

### Peak-to-Peak Output Noise Measurement Test

Use a  $C_{out}$  0.47uF ceramic capacitor.

Scope measurement should be made by using a BNC socket, measurement bandwidth is 0–20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

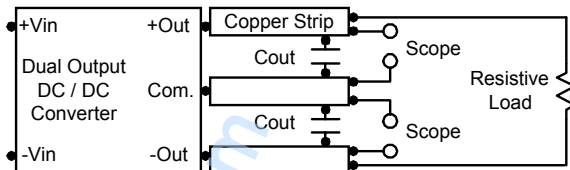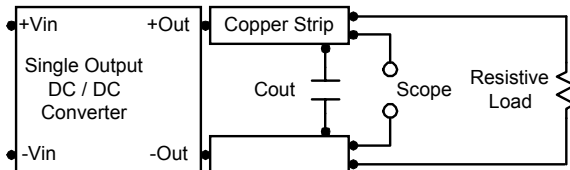

## Design & Feature Considerations

### Maximum Capacitive Load

The MIW1200 series has limitation of maximum connected capacitance at the output.

The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time.

For optimum performance we recommend 1000uF maximum capacitive load for dual outputs and 4000uF capacitive load for single outputs.

The maximum capacitance can be found in the data.

### Overcurrent Protection


To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.

In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.



Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 KHz) capacitor of a 3.3uF for the 12V input devices and a 1.5uF for the 24V and 48V devices.

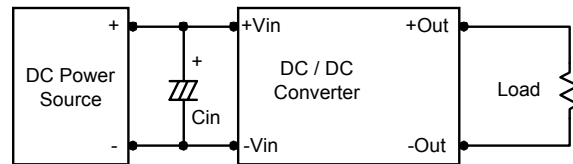

### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance.

To reduce output ripple, it is recommended to use 3.3uF capacitors at the output.

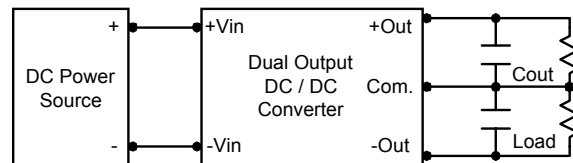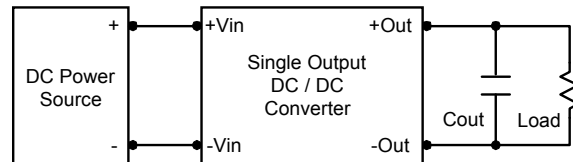


## **MIW1200 Series**

### **Thermal Considerations**


Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 90°C.

The derating curves are determined from measurements obtained in an experimental apparatus.



# MIW1200 Series

## Mechanical Data

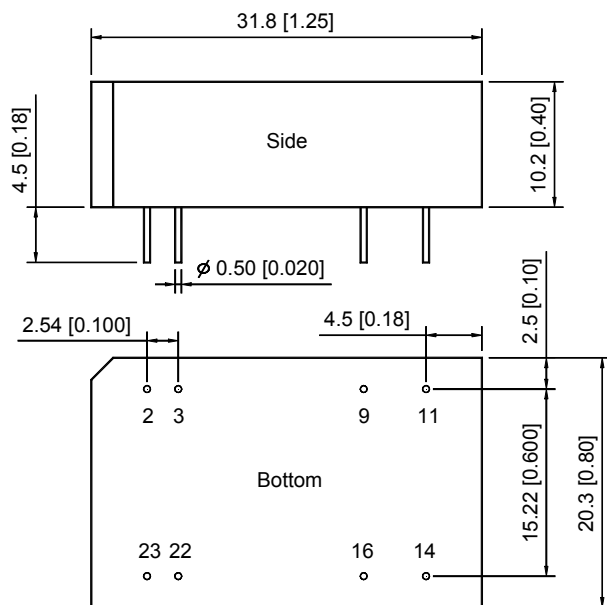


Tolerance	Millimeters	Inches
	.X $\pm$ 0.25	.XX $\pm$ 0.01
	.XX $\pm$ 0.25	.XXX $\pm$ 0.01
Pin	$\pm$ 0.05	$\pm$ 0.002


## Connecting Pin Patterns

Top View ( 2.54 mm / 0.1 inch grids )

### Single Output

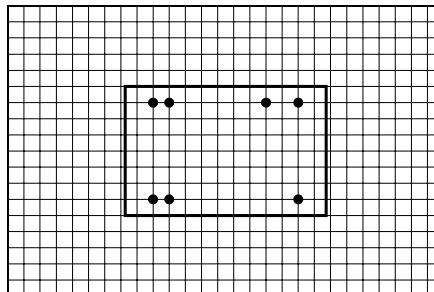

### Dual Output

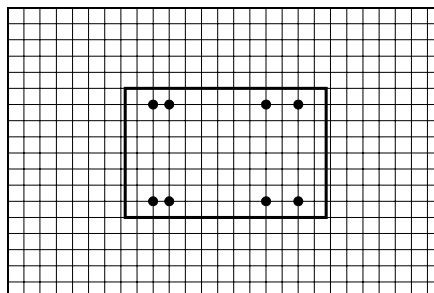

## Pin Connections

Pin	Single Output	Dual Output
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

NC: No Connection

## Physical Characteristics

Case Size	: 31.8x20.3x10.2 mm 1.25x0.8x0.4 inches
Case Material	: Non-Conductive Black Plastic
Weight	: 12.2g
Flammability	: UL94V-0

Units are encapsulated in a low thermal resistance molding compound which has excellent chemical resistance and electrical properties in high humidity environment and over a wide operating temperature range.

The encapsulant and outer shell of the unit have UL94V-0 ratings. The leads are golden plated for better soldering.