


Dual JK Negative Edge-Triggered Flip-Flop


This device consists of two high-speed completely independent transition clocked JK flip-flops. The clocking operation is independent of rise and fall times of the clock waveform. The JK design allows operation as a D flip-flop by connecting the J and K inputs together.

- Advanced very high speed CMOS
- Outputs source/sink 24 mA
- Transmission line driving 50 ohms
- ACT has TTL compatible inputs
- Operation from 2 to 6 volts guaranteed
- DC & AC Parameters guaranteed over -40 to +85°C

DV74AC112




N Suffix
Plastic DIP
AVG-003 Case




D Suffix
Plastic SOP
AVG-004 Case

LOGIC DIAGRAM

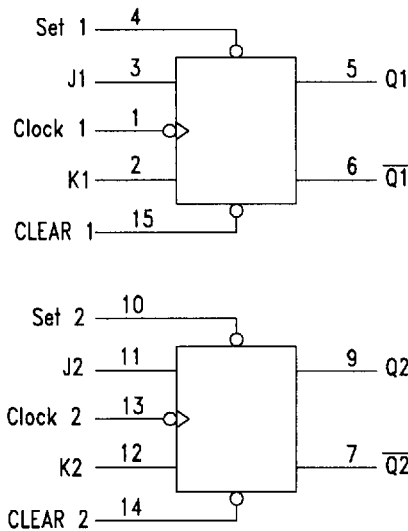

PIN ASSIGNMENT

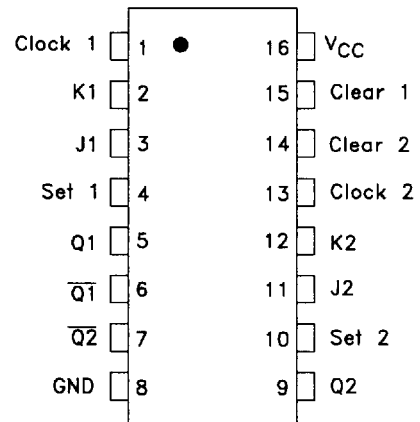

PIN 16 = V_{CC}
PIN 8 = GND

TRUTH TABLE

Mode	Inputs				Output	
	Set	Clear	J	K	Q	Q̄
Set	L	H	X	X	H	L
Reset (Clear)	H	L	X	X	L	H
Undertermined *	L	L	X	X	H	H
Toggle	H	H	h	h	q̄	q
Load "0" (Reset)	H	H	l	h	L	H
Load "1" (Set)	H	H	h	l	H	L
Hold	H	H	i	l	q	q̄

H,h = High Level Logic

L,l = Low Level Logic

X = Don't Care

I,h,q = Lower case letters indicate the state of the referenced input (or output) one set-up time prior to the HIGH to LOW clock transition.

* Both outputs will be HIGH while both Set and Clear are LOW, but the output states are unpredictable if Set and Clear go HIGH simultaneously.

ABSOLUTE MAXIMUM RATINGS

Maximum ratings are those values beyond which damage to the device may occur.

Symbol	Parameter	AC112	Unit
V _{CC}	DC Supply Voltage (Referenced to GND)	- 0.5 to +7.0	V
V _{IN}	DC Input Voltage (Referenced to GND)	- 0.5 to V _{CC} +0.5	V
V _{OUT}	DC Output Voltage (Referenced to GND)	- 0.5 to V _{CC} +0.5	V
I _{IN}	DC Input Current, per Pin	± 20	mA
I _{OUT}	DC Output Sink/Source Current, per Pin	± 50	mA
I _{CC}	DC V _{CC} or GND Current per Output Pin	± 50	mA
T _{STG}	Storage Temperature	- 65 to +150	°C

GUARANTEED OPERATING CONDITIONS

Symbol	Parameter	Min	Typ	Max	Unit
V _{CC}	Supply Voltage		'AC		
V _{IN} , V _{OUT}	DC Input Voltage, Output Voltage, (Ref. to GND)	2.0	5.0	6.0	V
t _r , t _f	Input Rise and Fall Time (V _{IN} from 30% to 70% V _{CC})	V _{CC} @ 3.0 V		150	ns/V
		V _{CC} @ 4.5 V		40	ns/V
		V _{CC} @ 5.5 V		25	ns/V
T _A	Operating Ambient Temperature Range	-40		85	°C
C _{IN}	Input Capacitance		4.5		pF
CPD	Power Dissipation Capacitance		35		pF




DC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Conditions	V _{CC} (V)	AC112			Unit		
				TA = +25°C		TA = -40 to +85°C			
				Typ	Guaranteed Limits				
V _{IH}	Minimum High Level Input Voltage	V _{OUT} = 0.1V or V _{CC} - 0.1 V	3.0	1.5	2.1	2.1	V		
			4.5	2.25	3.15	3.15			
			5.5	2.75	3.85	3.85			
V _{IL}	Maximum Low Level Input Voltage	V _{OUT} = 0.1V or V _{CC} - 0.1 V	3.0	1.5	0.9	0.9	V		
			4.5	2.25	1.35	1.35			
			5.5	2.75	1.65	1.65			
V _{OH}	Minimum High Level Output Voltage	I _{OUT} = -50 μA	3.0	2.99	2.9	2.9	V		
			4.5	4.49	4.4	4.4			
			5.5	5.49	5.4	5.4			
		V _{IN} = V _{IL} or V _{IH}	I _{OH}	-12mA	3.0		2.56	2.46	V
				-24mA	4.5		3.86	3.76	
		-24 mA	5.5		4.86	4.76			
V _{OL}	Maximum Low Level Output Voltage	I _{OUT} = 50 μA	3.0	0.002	0.1	0.1	V		
			4.5	0.001	0.1	0.1			
			5.5	0.001	0.1	0.1			
		V _{IN} = V _{IL} or V _{IH}	I _{OL}	12mA	3.0		0.36	0.44	V
				24mA	4.5		0.36	0.44	
		24 mA	5.5		0.36	0.44			
I _{IN}	Maximum Input Leakage Current	V _I = V _{CC} , GND	5.5		±0.1	±1.0	μA		
I _{CC}	Maximum Quiescent Supply Current	V _{IN} = V _{CC} or GND	5.5		4.0	40	μA		

AC CHARACTERISTICS over full operating conditions

Symbol	Parameter	V _{CC} ±10% (V)	AC112				Unit
			T _A = +25°C C _L = 50 pF		T _A = -40°C to +85°C C _L = 50 pF		
			Min	Max	Min	Max	
t _{max}	Maximum Clock Frequency	3.3 5.0	145 145		125 125		MHz
t _{PLH}	Propagation Delay C _{Pn} to Q _n or \bar{Q}_n	3.3 5.0	1.0 1.0	16.0 13.0	1.0 1.0	17.0 13.5	ns
t _{PHL}	Propagation Delay C _{Pn} to Q _n or \bar{Q}_n	3.3 5.0	1.0 1.0	16.0 13.0	1.0 1.0	16.5 13.5	ns
t _{PLH}	Propagation Delay \bar{C}_{Dn} or \bar{S}_{Dn} to Q _n or \bar{Q}_n	3.3 5.0	1.0 1.0	11.0 9.5	1.0 1.0	11.5 10.0	ns
t _{PHL}	Propagation Delay \bar{C}_{Dn} or \bar{S}_{Dn} to Q _n or \bar{Q}_n	3.3 5.0	1.0 1.0	11.0 9.5	1.0 1.0	11.5 10.0	ns
t _s	Set-up Time, High or Low J _n or \bar{K}_n to C _{Pn}	3.3 5.0	6.5 4.5		7.5 5.0		ns
t _h	Hold Time, High or Low J _n or \bar{K}_n to C _{Pn}	3.3 5.0	0 0		0 0		ns
t _w	Pulse Width C _{Pn}	3.3 5.0	6.0 5.0		6.5 5.5		ns
t _w	Pulse Width \bar{C}_{Dn} or \bar{S}_{Dn}	3.3 5.0	6.0 5.0		7.5 5.5		ns
t _{rec}	Recovery Time C _{Dn} or S _{Dn} to CP	3.3 5.0	0 0		0 0		ns

SWITCHING WAVEFORMS

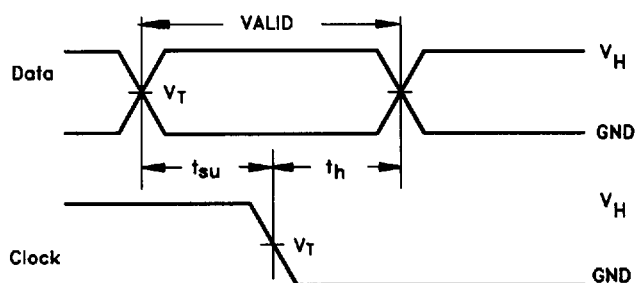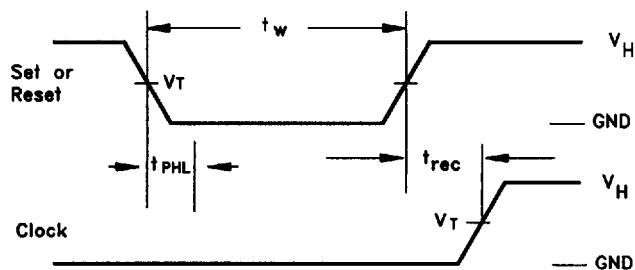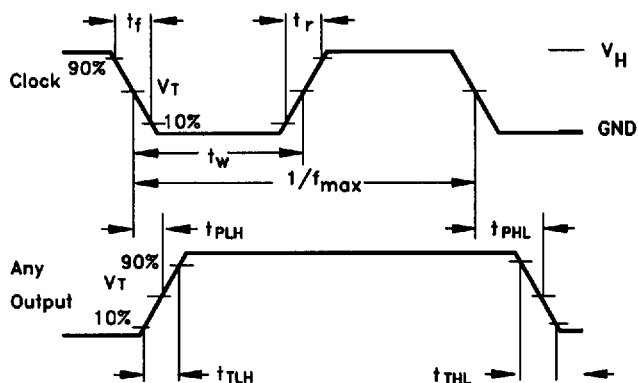

Input and output threshold voltage:

V_T = 50% V_{CC} for AC

V_H = V_{CC} for AC