

SHINDENGEN

Schottky Rectifiers (SBD)

Dual

SF30SC3L

30V 30A

FEATURES

T_j150
Low V_F=0.45V
P_{RRSM} avalanche guaranteed
Fully Isolated Molding
Dielectric strength 2kV guaranteed


APPLICATION

Switching power supply
DC/DC converter
Home Appliances, Office Equipment
Telecommunication

OUTLINE DIMENSIONS

Case : FTO-220

Unit : mm

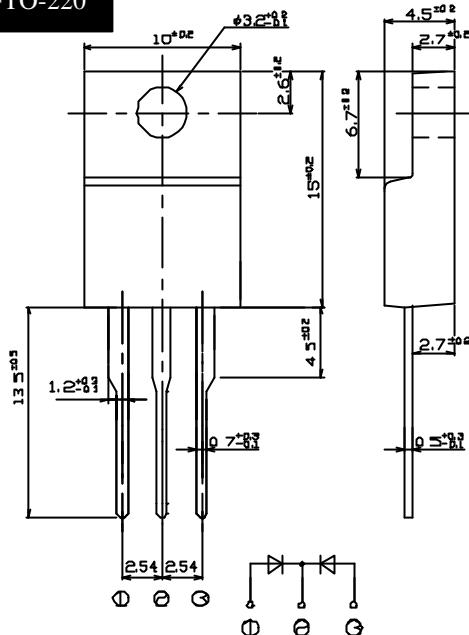

RATINGS


Absolute Maximum Ratings (If not specified T_c=25)

| Item | Symbol | Conditions | Ratings | Unit |
|---------------------------------------|-------------------|--|-----------|------|
| Storage Temperature | T _{stg} | | -55 ~ 150 | |
| Operating Junction Temperature | T _j | | 150 | |
| Maximum Reverse Voltage | V _{RM} | | 30 | V |
| Repetitive Peak Surge Reverse Voltage | V _{RRSM} | Pulse width 0.5ms, duty 1/40 | 35 | V |
| Average Rectified Forward Current | I _o | 50Hz sine wave, R-load, Rating for each diode I _o /2, T _c =111 | 30 | A |
| Peak Surge Forward Current | I _{FSM} | 50Hz sine wave, Non-repetitive 1 cycle peak value, T _j =25 | 350 | A |
| Repetitive Peak Surge Reverse Power | P _{RRSM} | Pulse width 10 μ s, Rating of per diode, T _j =25 | 1000 | W |
| Dielectric Strength | V _{dis} | Terminals to case, AC 1 minute | 2 | kV |
| Mounting Torque | T _{OR} | (Recommended torque 0.3N·m) | 0.5 | N·m |


Electrical Characteristics (If not specified T_c=25)

| Item | Symbol | Conditions | Ratings | Unit |
|----------------------|----------------|--|----------|------|
| Forward Voltage | V _F | I _F =12.5A, Pulse measurement, Rating of per diode | Max.0.45 | V |
| Reverse Current | I _R | V _R =V _{RM} , Pulse measurement, Rating of per diode | Max.15 | mA |
| Junction Capacitance | C _j | f=1MHz, V _R =10V, Rating of per diode | Typ.960 | pF |
| Thermal Resistance | j _C | junction to case | Max.2.0 | /W |


SF30SC3L Forward Voltage

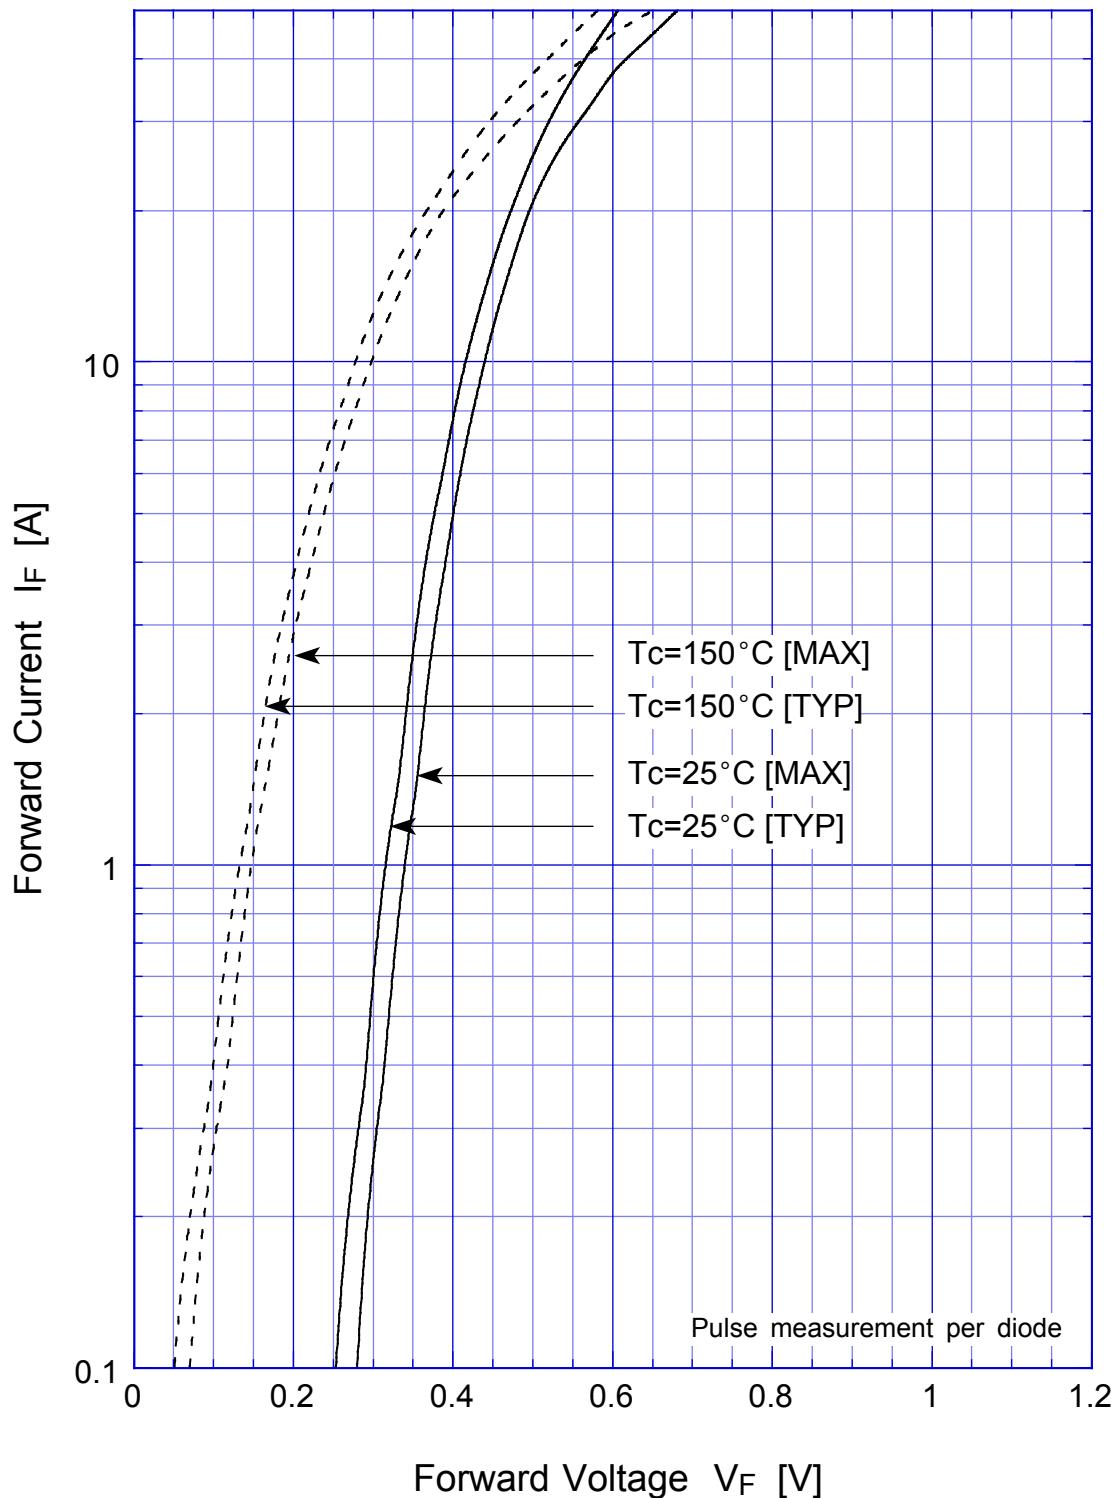



SF30SC3L Junction Capacitance

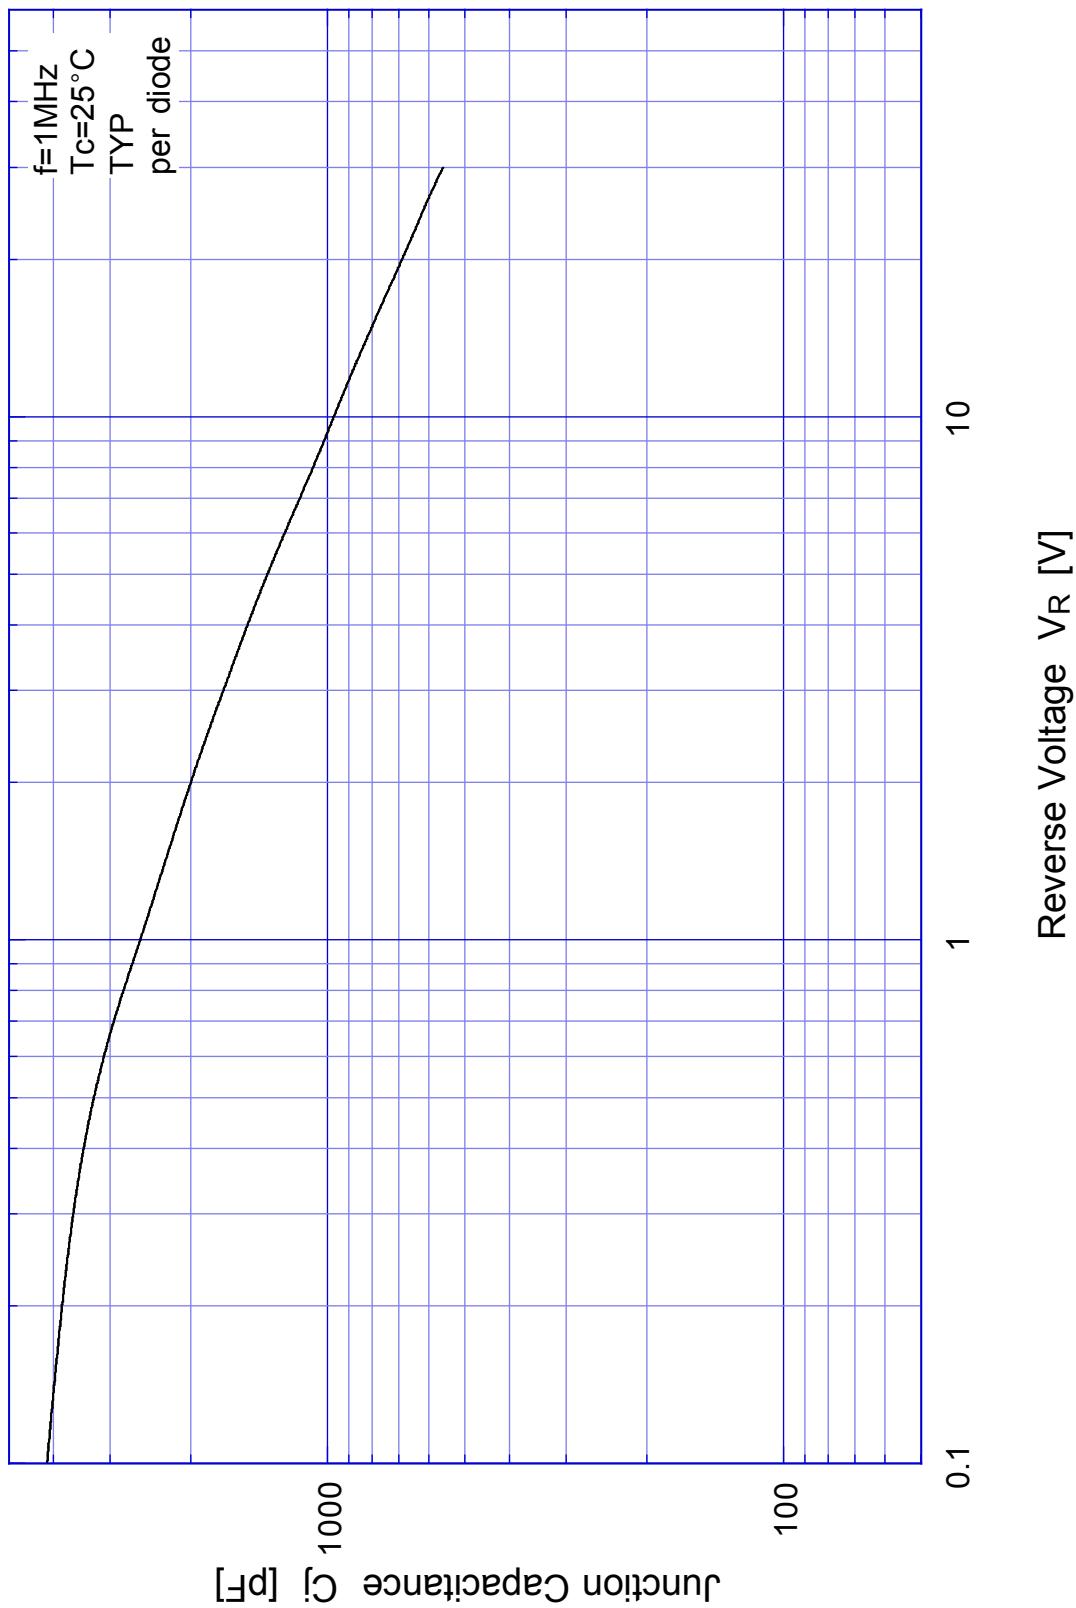



SF30SC3L Reverse Current


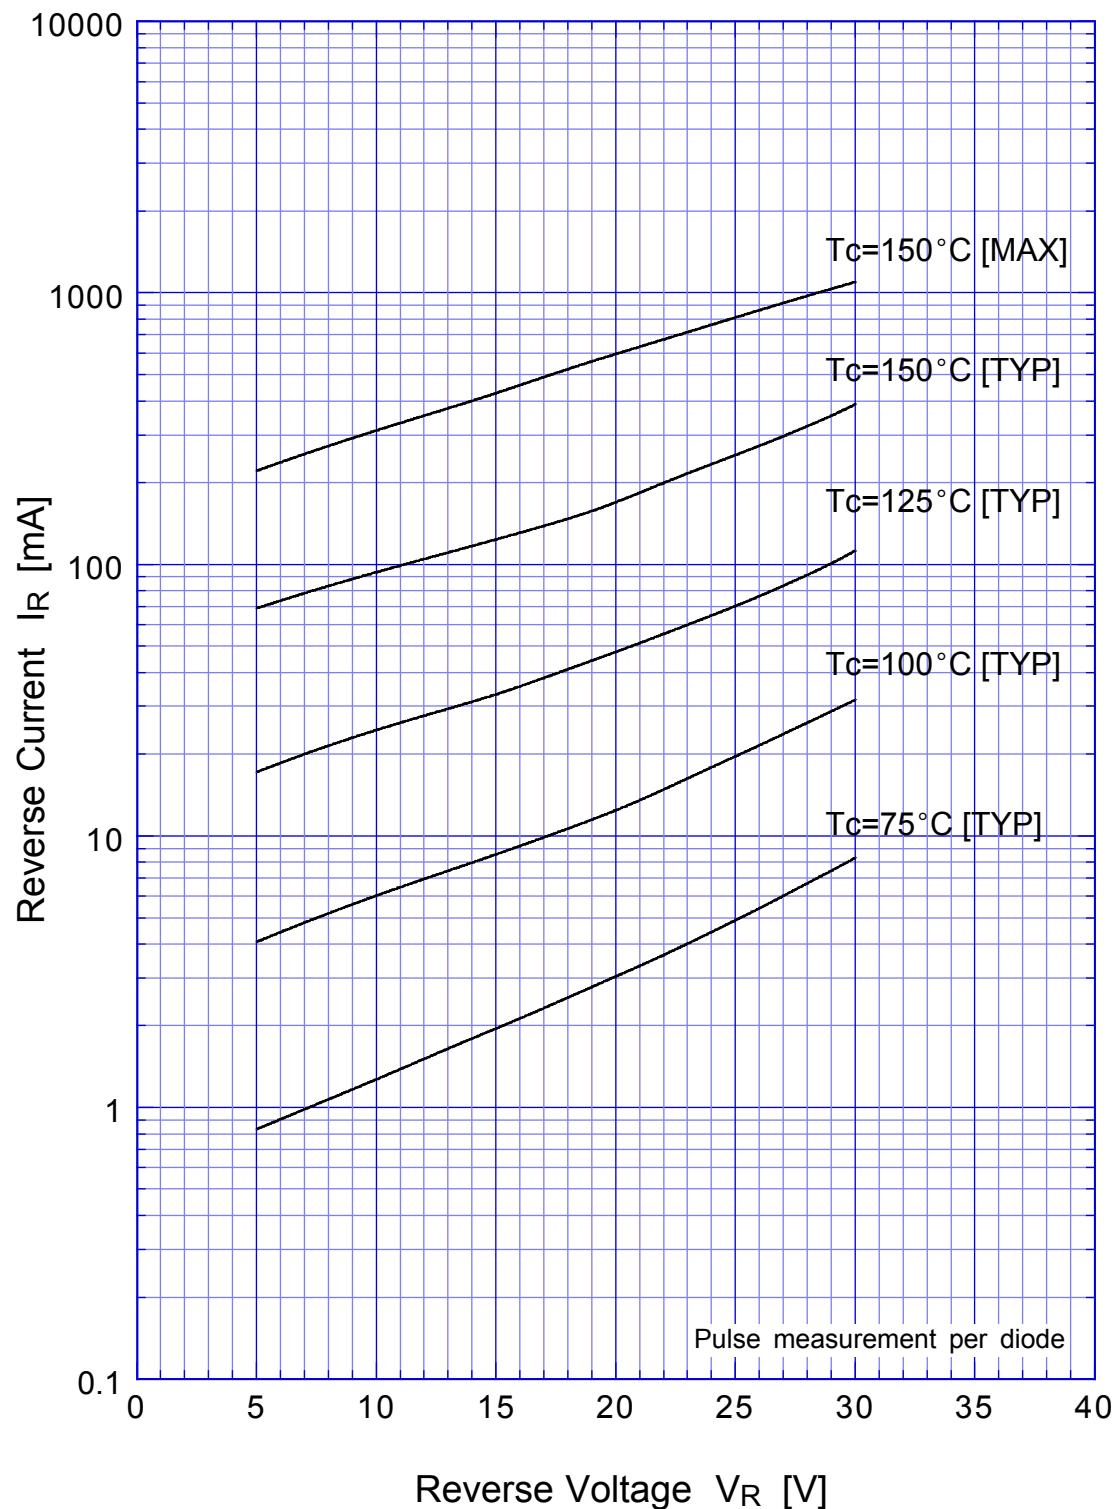


SF30SC3L Reverse Power Dissipation

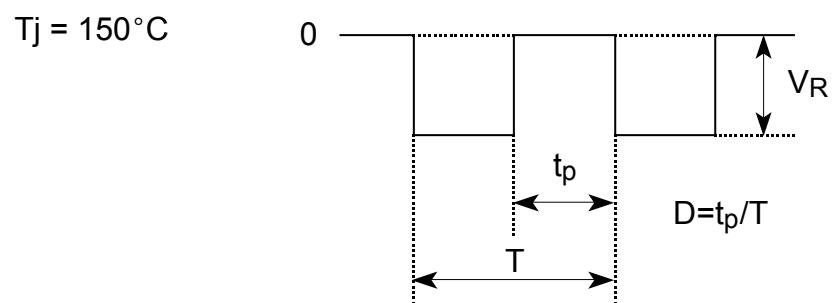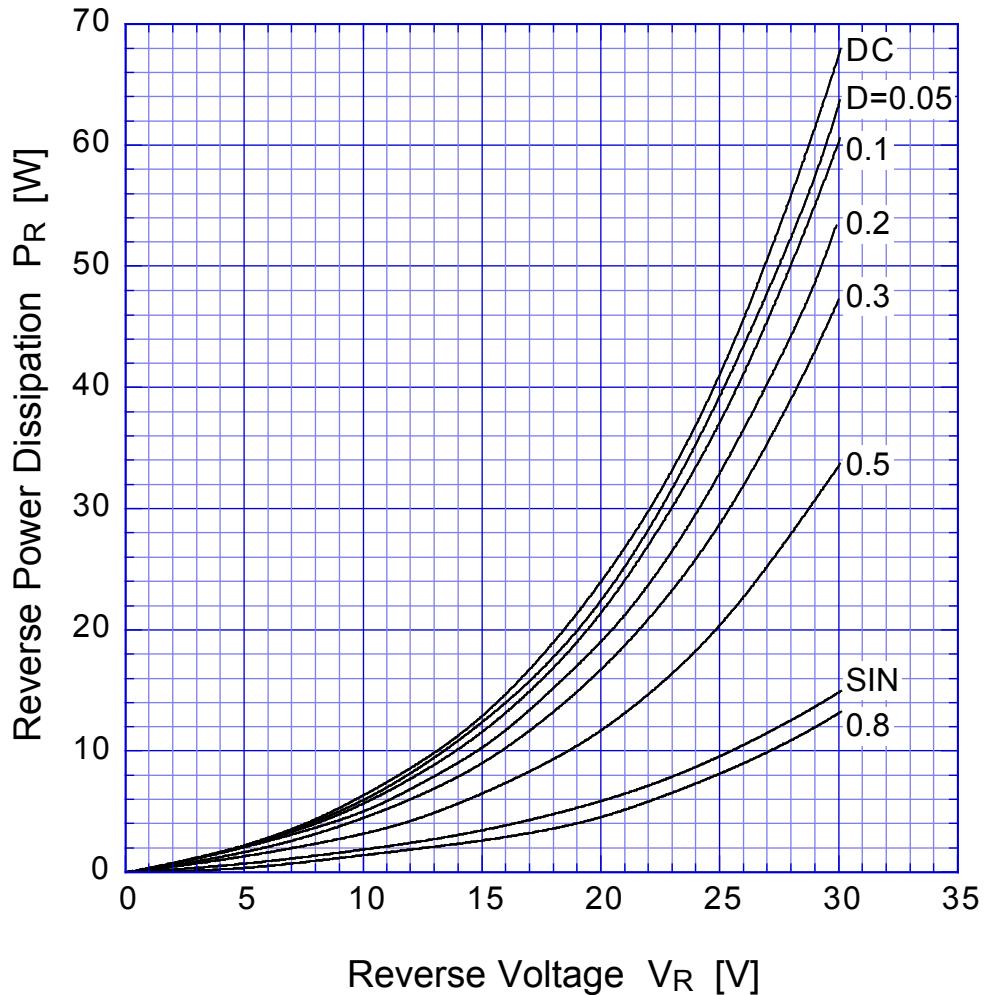


SF30SC3L Forward Power Dissipation

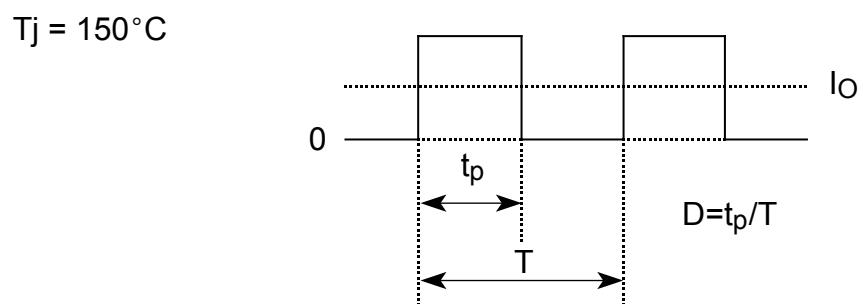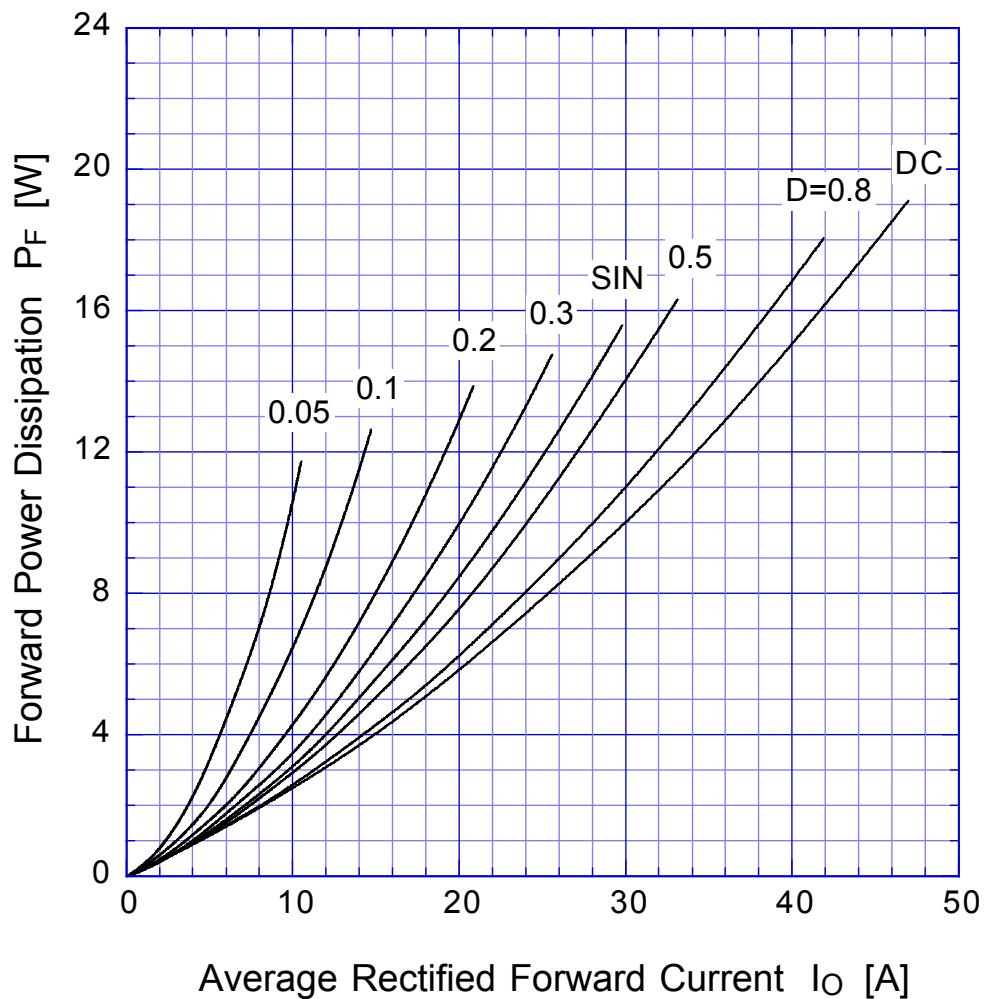


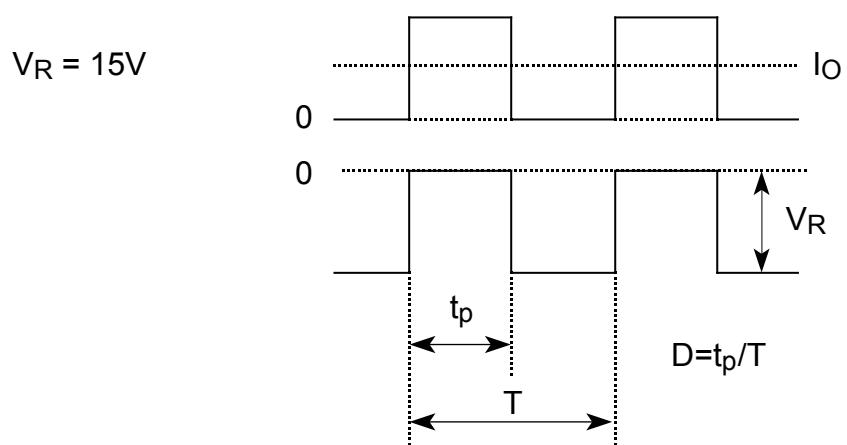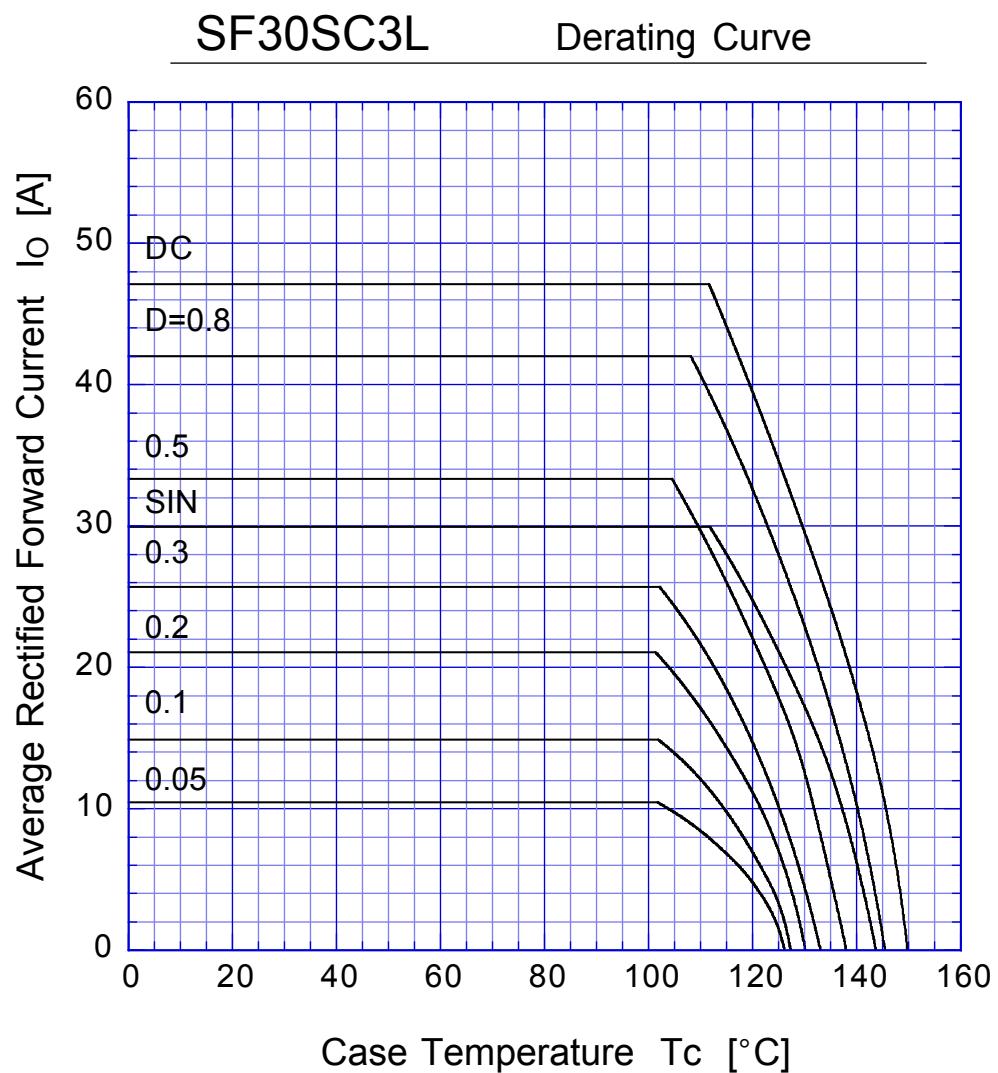

SF30SC3L Peak Surge Forward Capability

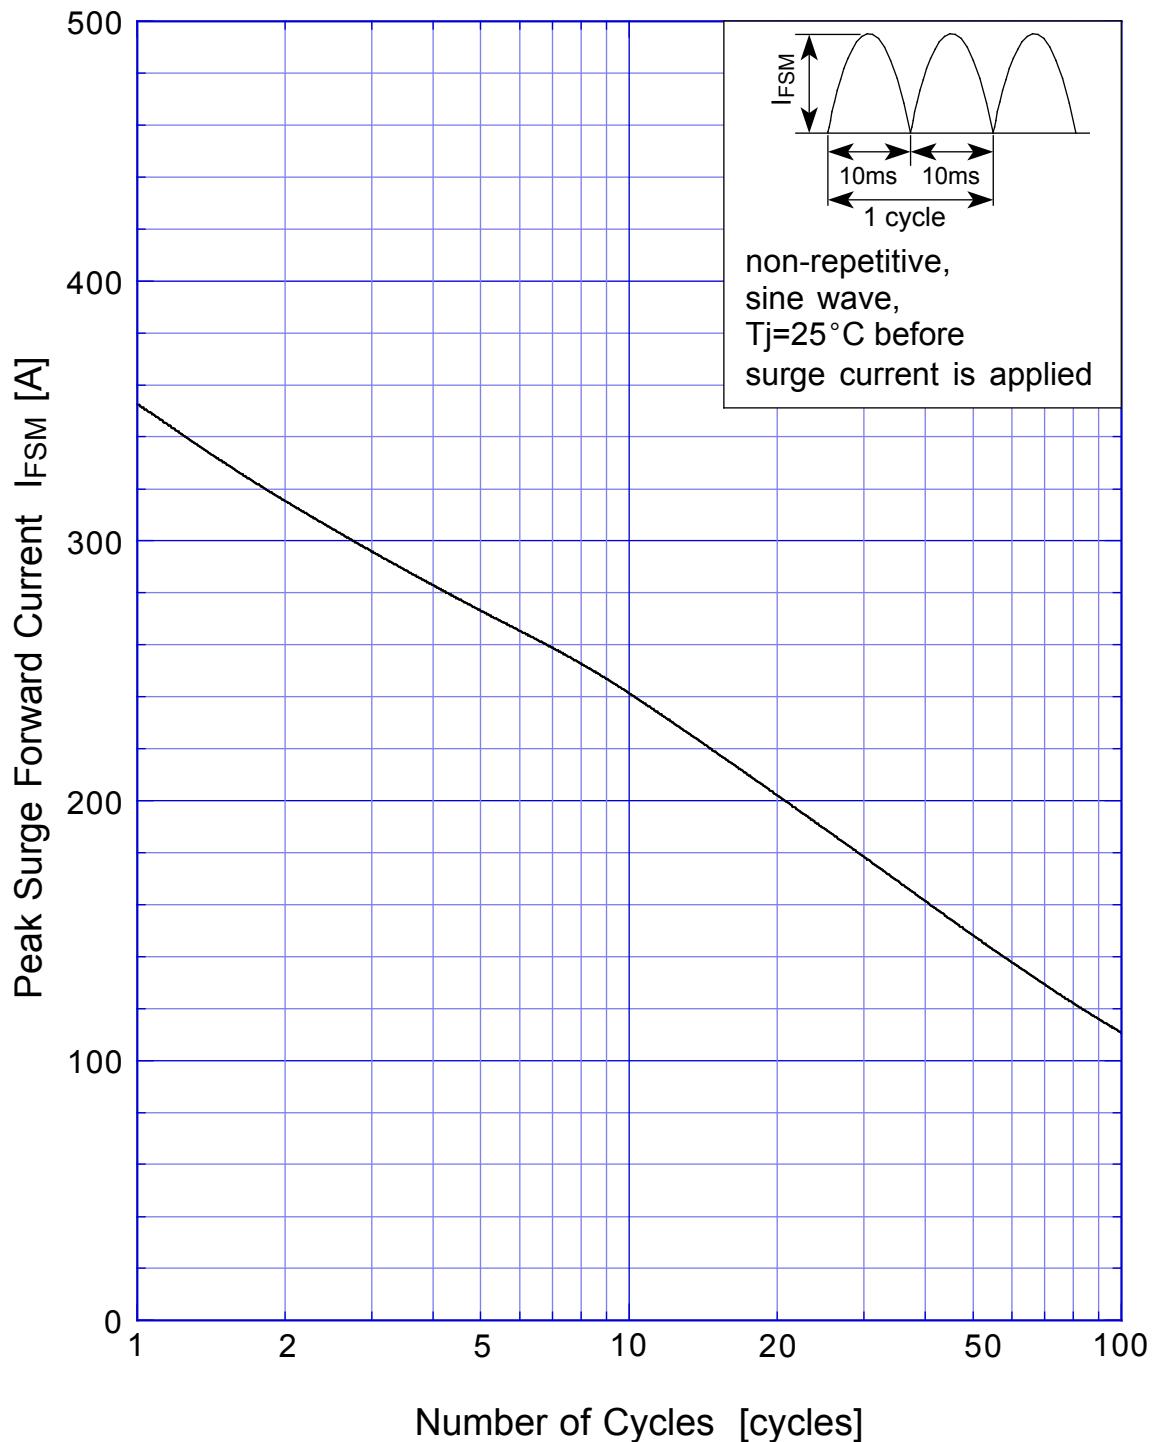

SBD Repetitive Surge Reverse Power Derating Curve

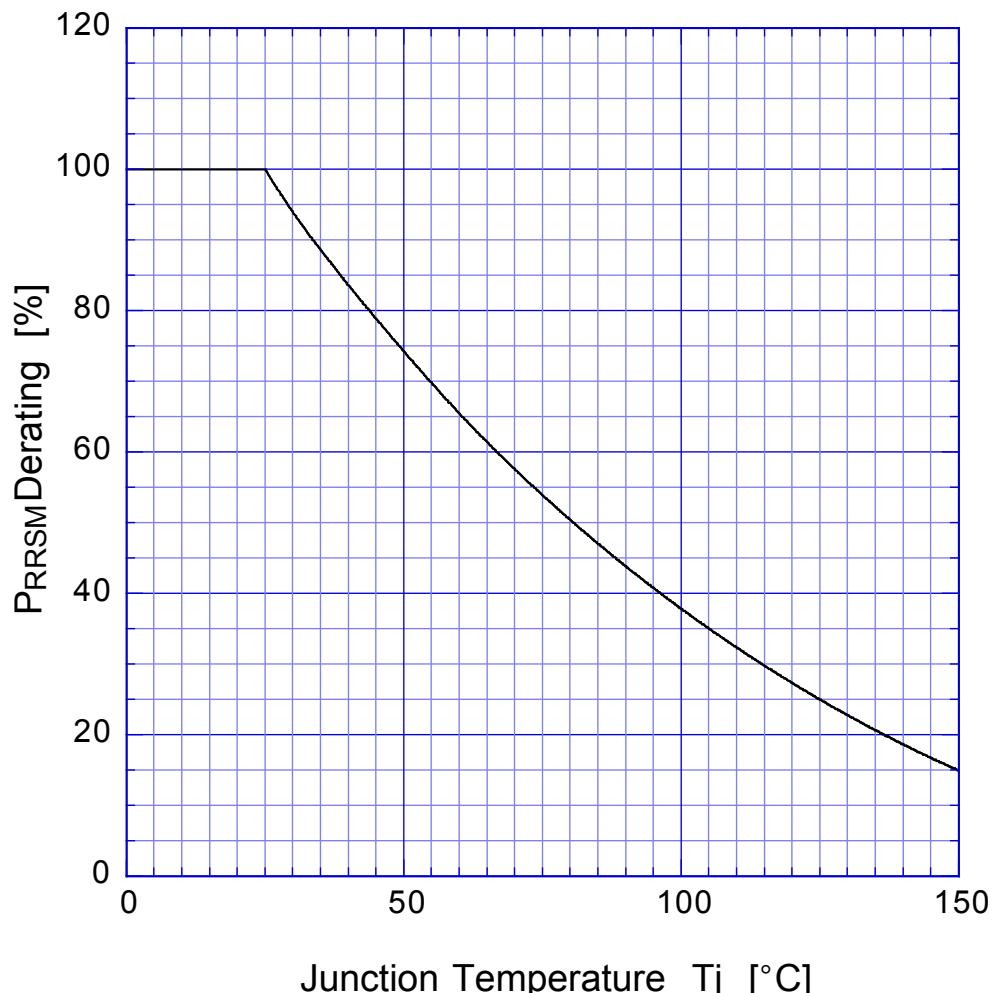

SBD Repetitive Surge Reverse Power Capability

