

# BL081

## 5-4000 MHz Wideband Low Noise Amplifier



### Device Features

- NF = 0.95 dB @ 900MHz at RF connectors of Demo board
- Gain = 20.5 dB @ 900 MHz
- OIP3 = 30.0 dBm @ 1900MHz
- Output P1 dB = 17.5 dBm @ 900MHz
- 5V/27mA, MTTF > 100 Years, MSL 1, Class 1A
- Lead-free/RoHS-compliant SOT-89 SMT package



### Product Description

BeRex's BL081 is a high performance LNA based on GaAs material with E-pHEMT process, packaged in a RoHS-compliant with SOT-89 surface mount package. It is designed for use where low noise and high linearity are required and features low noise and high OIP3 with **low current** at wideband frequency. It requires a few external matching components. All devices are 100% RF/DC tested and classified as HBM ESDS **Class 1A**.

### Typical Performance<sup>1</sup>

Parameter	Frequency					Unit
	900	1900	2140	2450	3500	
Gain	20.5	17.0	16.0	15.5	13.1	dB
S11	-20.0	-20.0	-20.0	-21.0	-35.0	dB
S22	-22.0	-17.0	-17.0	-17.0	-18.0	dB
OIP3 <sup>2</sup>	28.5	30.0	30.0	30.0	32.0	dBm
P1dB	17.5	17.5	17.5	17.5	17.5	dBm
Noise Figure	0.95	1.13	1.15	1.25	1.25	dB

<sup>1</sup> Device performance \_ measured on a BeRex evaluation board at 25°C, 50 Ω system.


<sup>2</sup> OIP3 \_ measured with two tones at an output of 5 dBm per tone separated by 1 MHz.

### Applications

- Base station Infrastructure/RFID
- Commercial/Industrial/Military wireless system

	Min.	Typical	Max.	Unit
Bandwidth	5		4000	MHz
I <sub>c</sub> @ (V <sub>c</sub> = 5V)	15	27	35	mA
V <sub>c</sub>		5.0		V
R <sub>TH</sub>		63		°C/W

### Applications Circuit

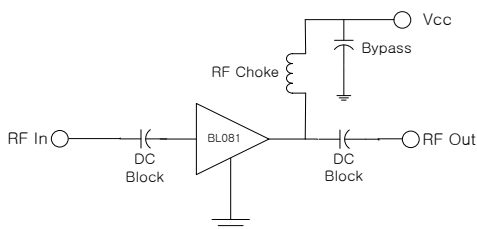

\*external matching circuit: refer to the page 4 to 12.


### Absolute Maximum Ratings

Parameter	Rating	Unit
Operating Case Temperature	-40 to +85	°C
Storage Temperature	-55 to +155	°C
Junction Temperature	+220	°C
Operating Voltage	+6.0	V
Supply Current	160	mA
Input RF Power	30	dBm


Operation of this device above any of these parameters may result in permanent damage.



### V-I Characteristics

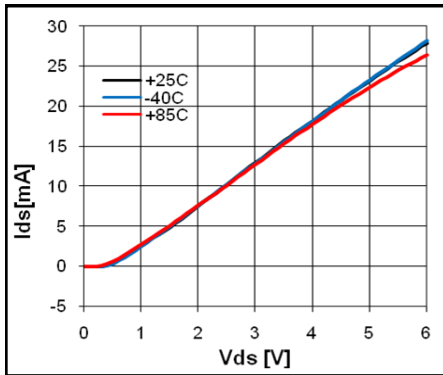


### BeRex SOT89 Evaluation Board

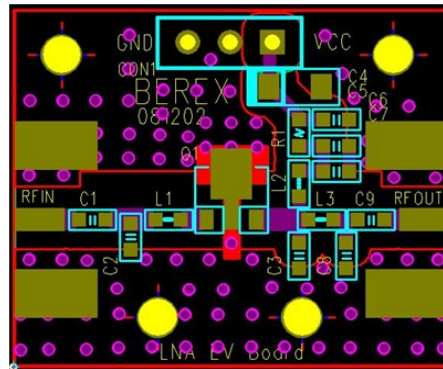

\*Dielectric constant \_ 4.2 \*RF pattern width 52mil \*31mil thick FR4 PCB

### Typical Device Data

S-parameters (Vd=5V, Id=25mA, T=25°C)

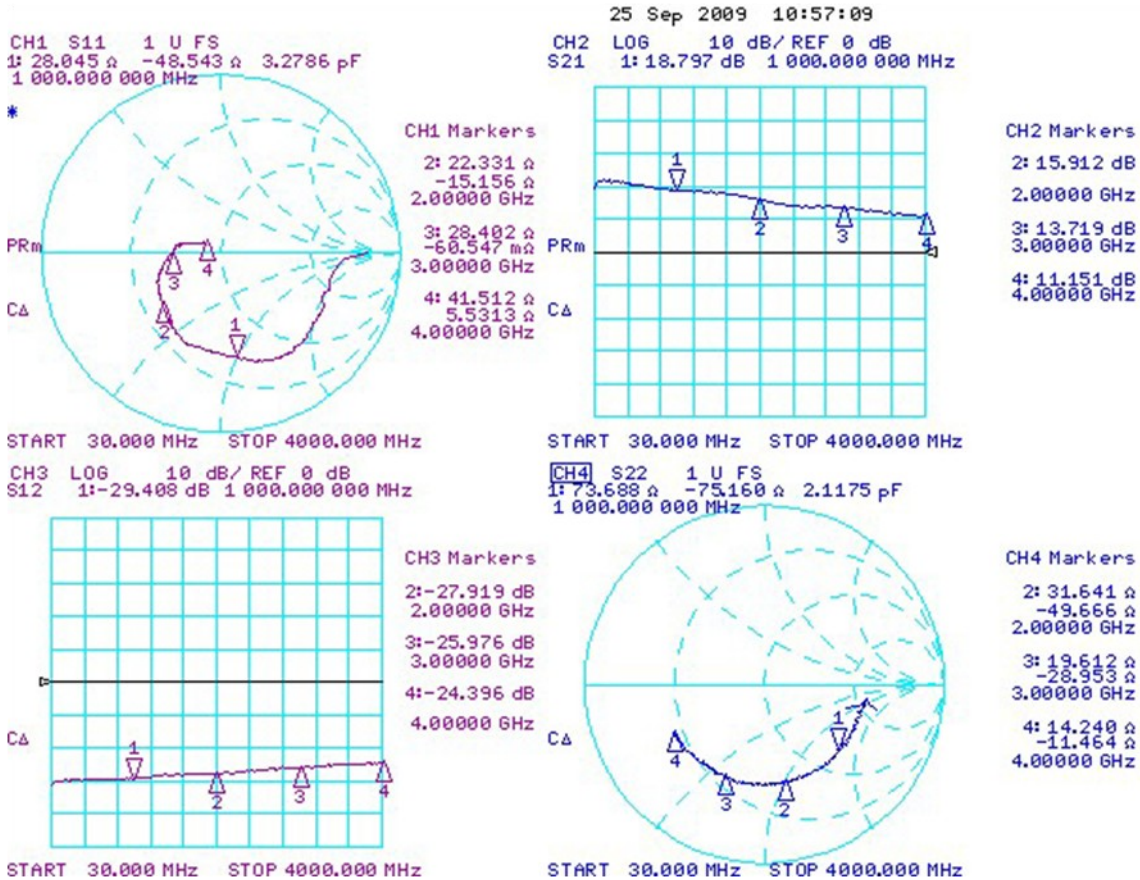

# BL081

## 5-4000 MHz Wideband Low Noise Amplifier



### S-Parameter

(V<sub>device</sub> = 5.0V, I<sub>cc</sub> = 25mA, T = 25 °C, calibrated to device leads)

Freq [MHz]	S11 [Mag]	S11 [Ang]	S21 [Mag]	S21 [Ang]	S12 [Mag]	S12 [Ang]	S22 [Mag]	S22 [Ang]
100	0.637	-10.630	12.304	172.181	0.032	12.944	0.569	-8.574
500	0.678	-53.138	10.733	148.743	0.033	10.572	0.558	-21.318
1000	0.589	-82.755	8.815	126.435	0.035	17.891	0.554	-41.116
1500	0.513	-117.379	7.781	105.710	0.039	22.555	0.553	-60.200
2000	0.429	-139.689	6.261	82.420	0.041	23.205	0.555	-78.933
2500	0.371	-160.253	4.886	74.655	0.046	29.503	0.563	-96.918
3000	0.280	179.851	4.870	63.131	0.051	27.793	0.558	-114.110
3500	0.205	164.524	4.016	47.709	0.056	27.902	0.554	-133.482
4000	0.107	144.464	3.553	41.113	0.061	27.767	0.567	-153.176

# BL081



## 5-4000 MHz Wideband Low Noise Amplifier



### Application Circuit: 900 MHz





Schematic Diagram	BOM	Tolerance	
	C1	10uF	± 20%
	C2	1nF	± 5%
	C3	100pF	±5%
	C4	100pF	±5%
	C5	100pF	±5%
	C6	0.5pF	± 5%
	L1	100nH	±5%
	L2	8.2nH	±5%
	L3	10nH	±5%

### Typical Performance

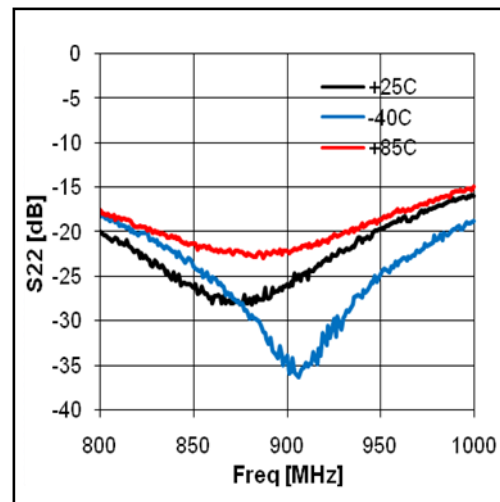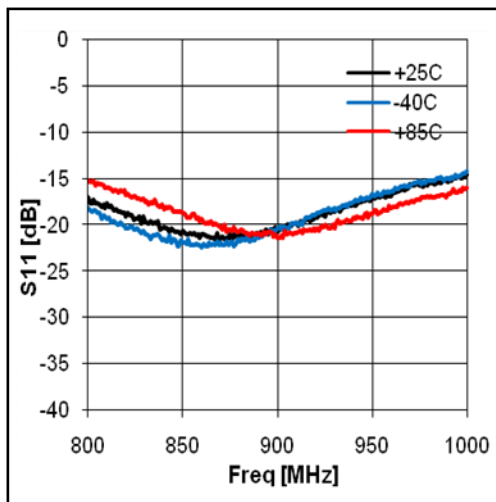

# BL081

## 5-4000 MHz Wideband Low Noise Amplifier

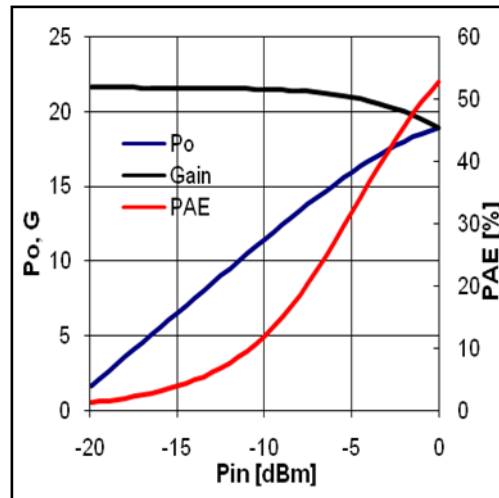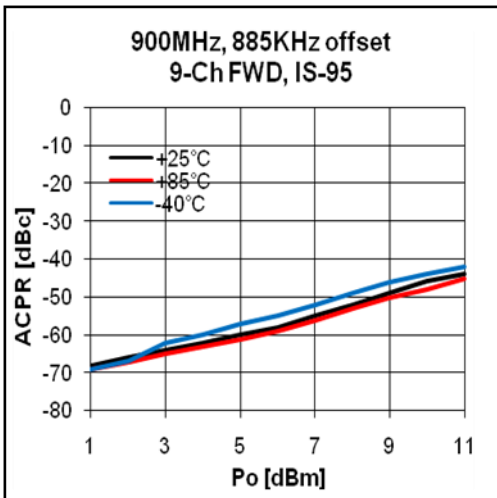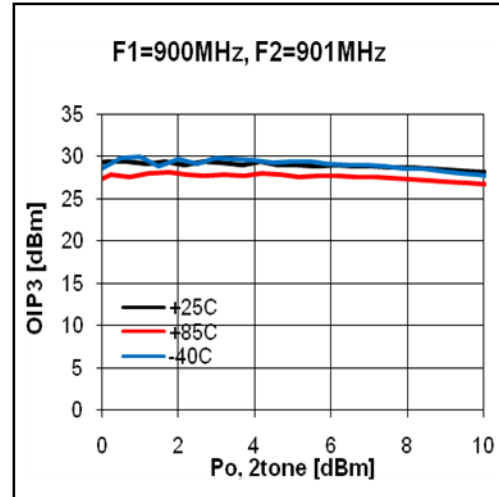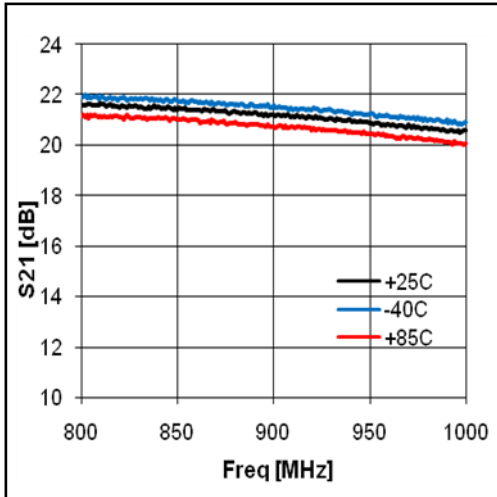

### Noise Figure Temperature Performance

(Vds = 5.0V, Ids = 25.0mA)

Freq	MHz	900	1900	2140	2450
Temp [°C]	-40	0.78	0.96	0.98	0.92
	25	0.98	1.25	1.18	1.16
	85	1.12	1.45	1.48	1.45

# BL081



## 5-4000 MHz Wideband Low Noise Amplifier



### Application Circuit: 1900 MHz





Schematic Diagram		BOM	Tolerance	
		C1	10uF	± 20%
		C2	1nF	± 5%
		C3	100pF	±5%
		C4	100pF	± 5%
		C5	100pF	± 5%
		C6	0.75pF	± 5%
		L1	18nH	±5%
		L2	2.7nH	±5%
L3	2.7nH	±5%		

### Typical Performance

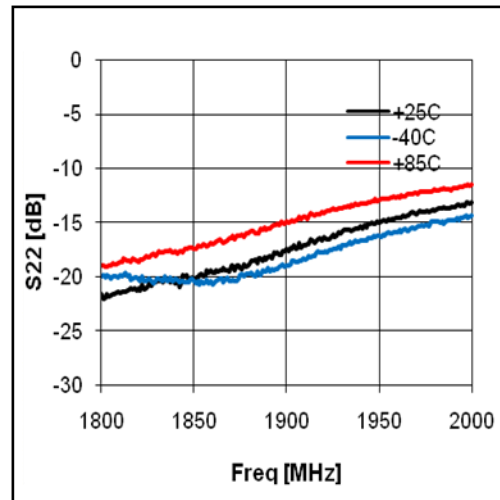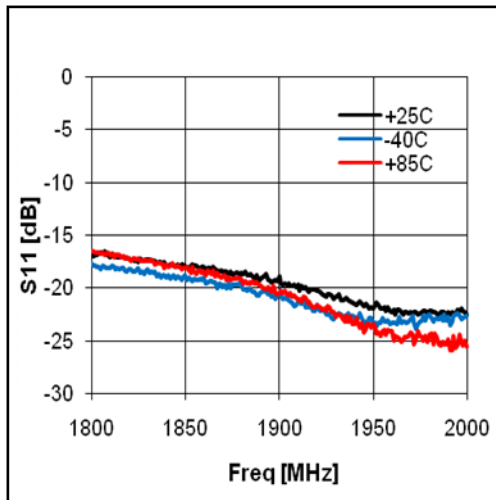

# BL081

## 5-4000 MHz Wideband Low Noise Amplifier

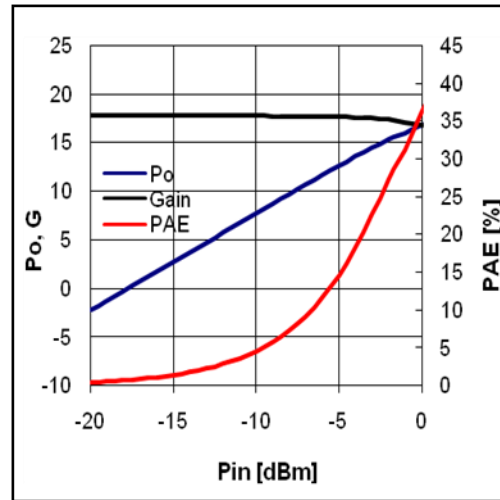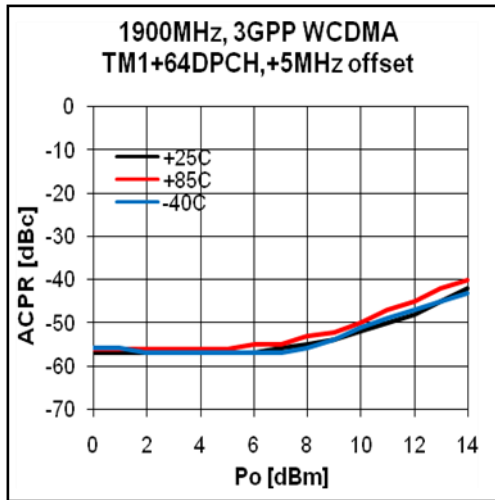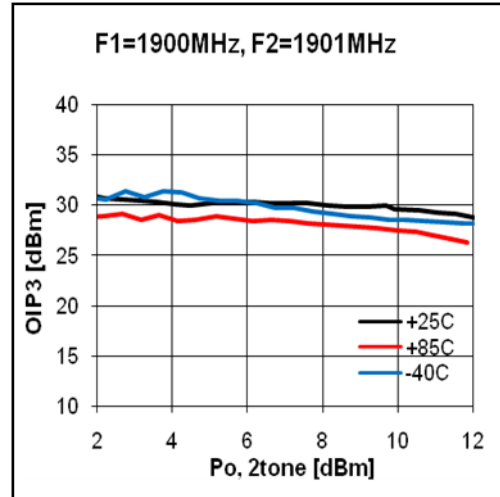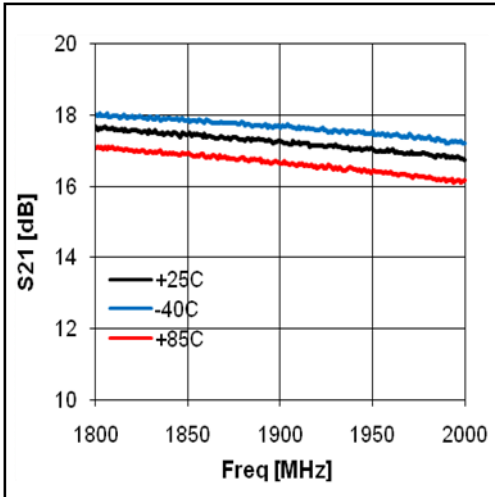

### Noise Figure Temperature Performance

(Vds = 5.0V, Ids = 25.0mA)

Freq	MHz	900	1900	2140	2450
Temp [°C]	-40	0.78	0.96	0.98	0.92
	25	0.98	1.25	1.18	1.16
	85	1.12	1.45	1.48	1.45

# BL081



## 5-4000 MHz Wideband Low Noise Amplifier



### Application Circuit: 2140 MHz

Schematic Diagram		BOM	Tolerance	
		C1	10uF	± 20%
		C2	1000pF	± 5%
		C3	100pF	±5%
		C4	18pF	± 5%
		C5	18pF	± 5%
		C6	0.75pF	± 5%
		C7	0.5pF	±5%
		L1	33nH	±5%
		L2	1.5nH	±5%
		L3	4.7nH	±5%





### Typical Performance

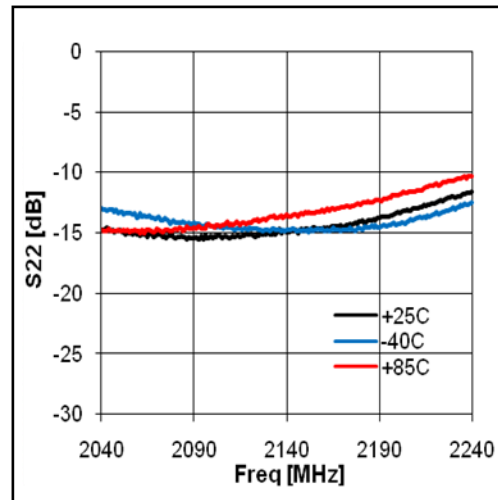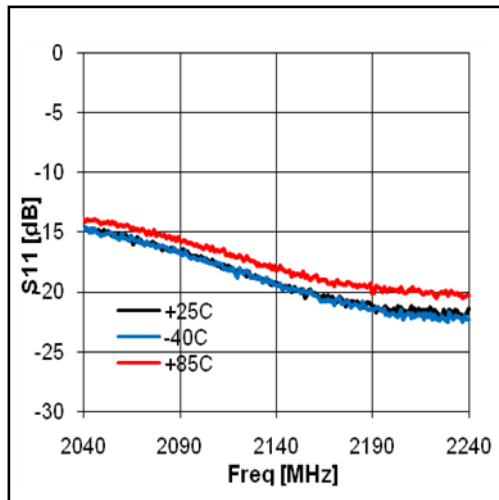



# BL081

## 5-4000 MHz Wideband Low Noise Amplifier

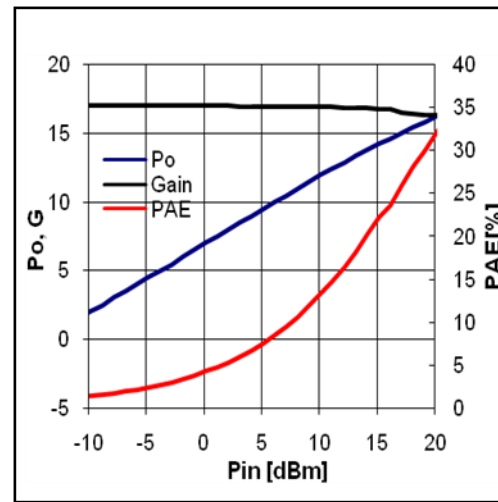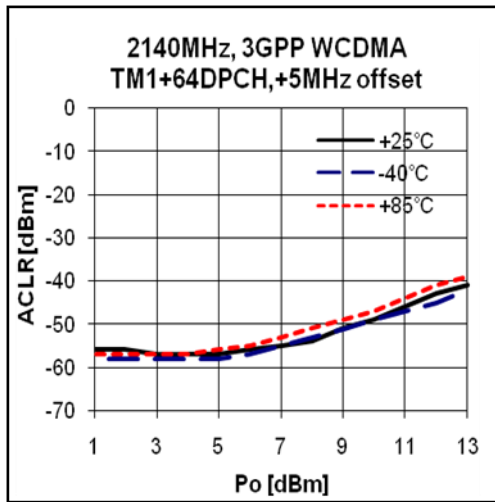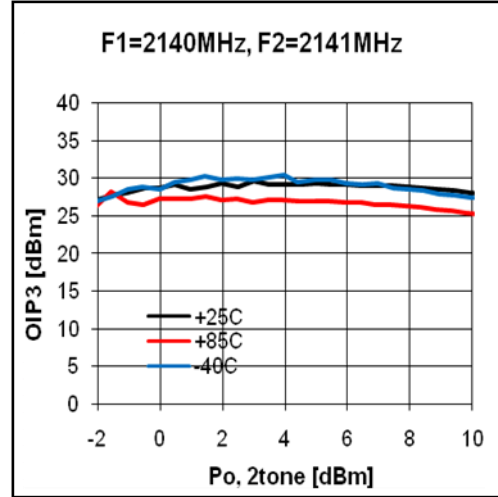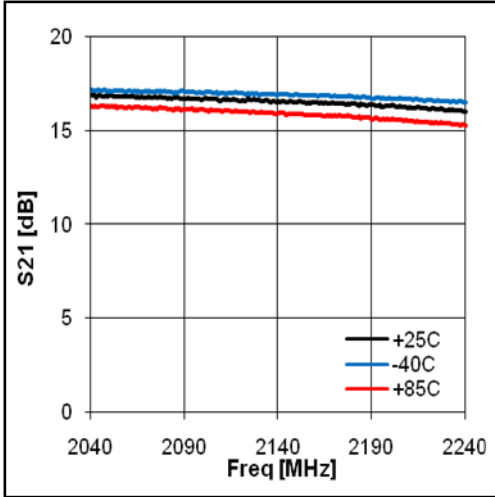

### Noise Figure Temperature Performance

(Vds = 5.0V, Ids = 25.0mA)


Freq	MHz	900	1900	2140	2450
Temp [°C]	-40	0.78	0.96	0.98	0.92
	25	0.98	1.25	1.18	1.16
	85	1.12	1.45	1.48	1.45

# BL081



## 5-4000 MHz Wideband Low Noise Amplifier



### Application Circuit: 2450 MHz




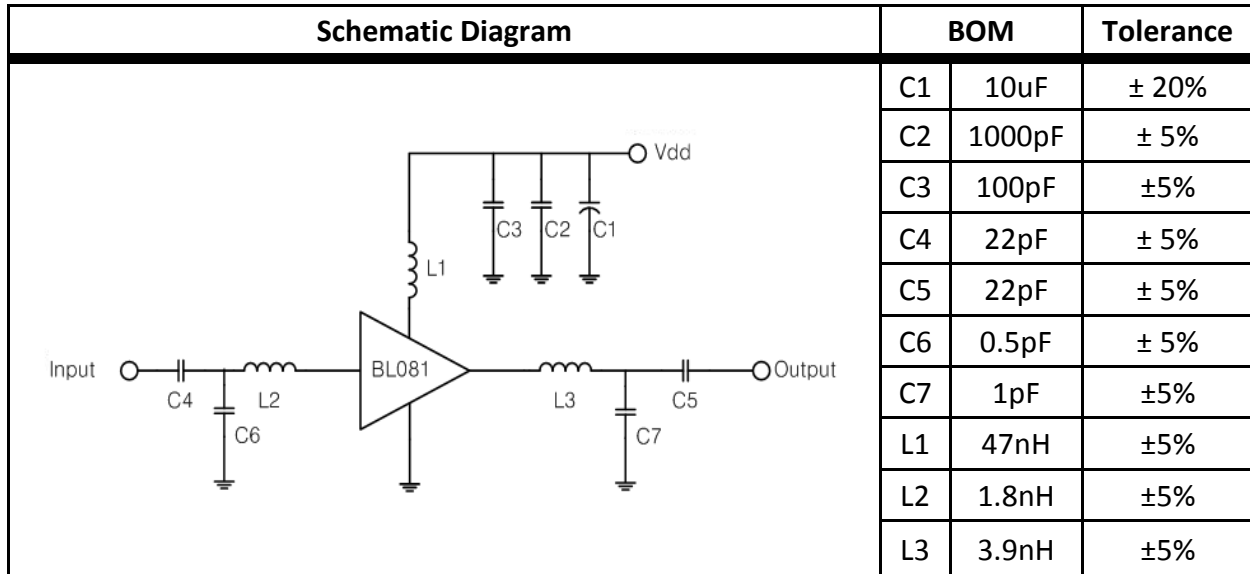


### Typical Performance

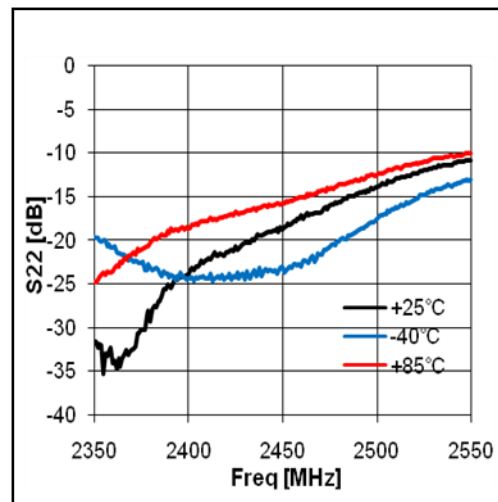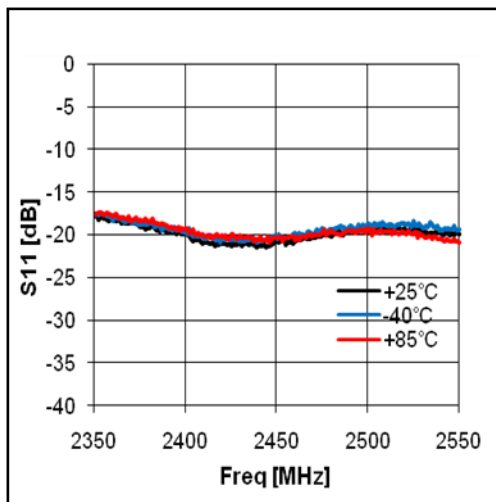

# BL081

## 5-4000 MHz Wideband Low Noise Amplifier

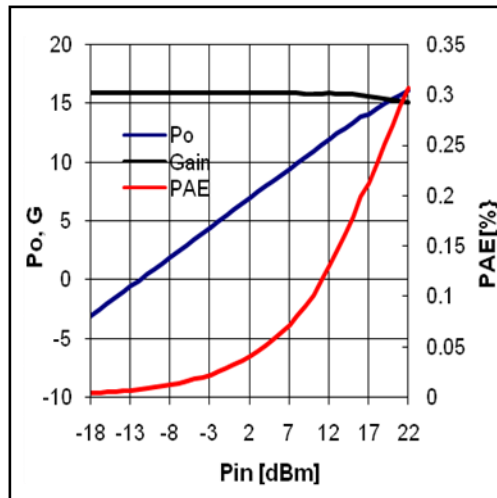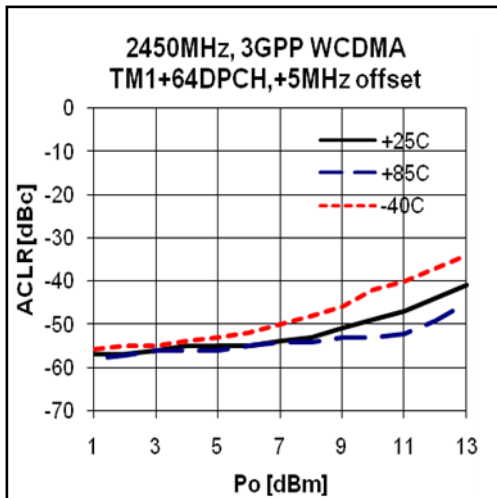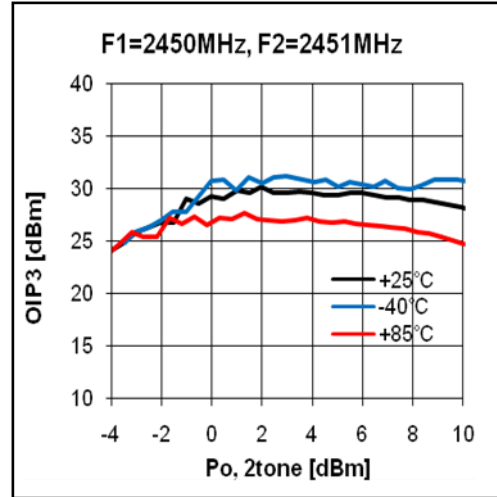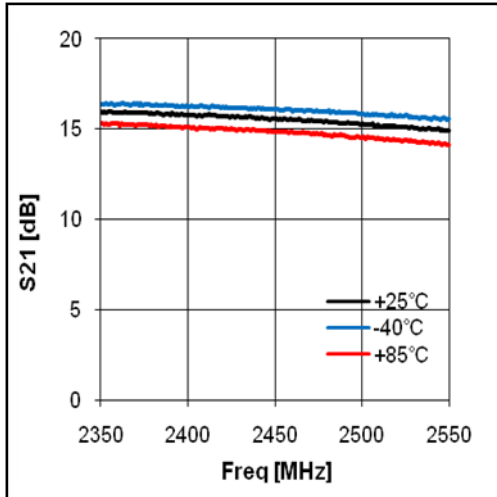

### Noise Figure Temperature Performance

(Vds = 5.0V, Ids = 25.0mA)

Freq	MHz	900	1900	2140	2450
Temp [°C]	-40	0.78	0.96	0.98	0.92
	25	0.98	1.25	1.18	1.16
	85	1.12	1.45	1.48	1.45

# BL081



## 5-4000 MHz Wideband Low Noise Amplifier



### Application Circuit: 3500 MHz



Schematic Diagram		BOM	Tolerance	
		C1	10uF	± 20%
		C2	1000pF	± 5%
		C3	100pF	±5%
		C4	18pF	± 5%
		C5	0.5pF	± 5%
		C6	3.3pF	± 5%
		C7	1pF	±5%
		C8	18pF	±5%
		L1	33nH	±5%
		L2	1.5nH	±5%

### Typical Performance

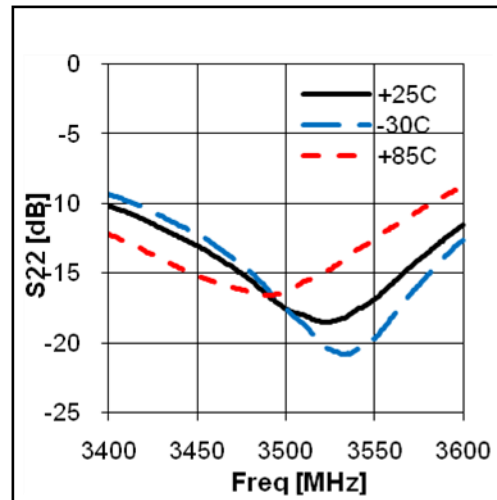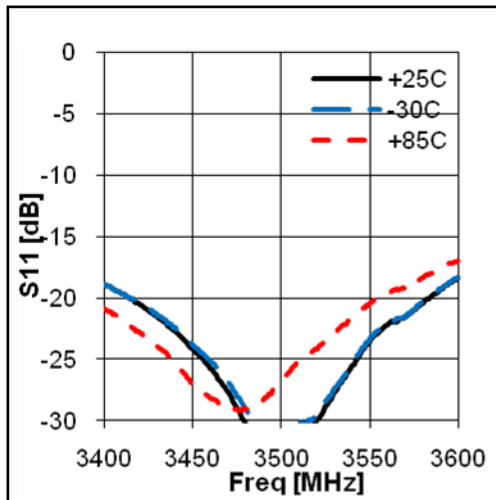

# BL081

## 5-4000 MHz Wideband Low Noise Amplifier

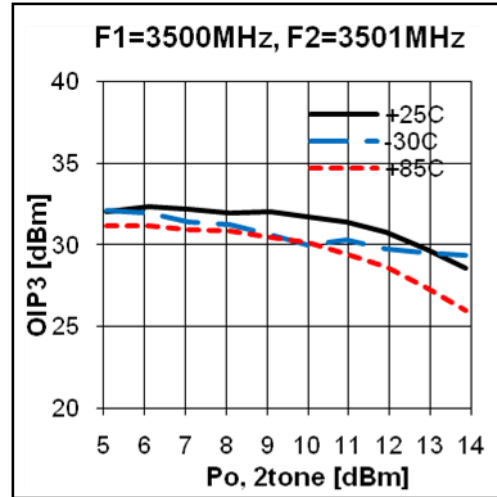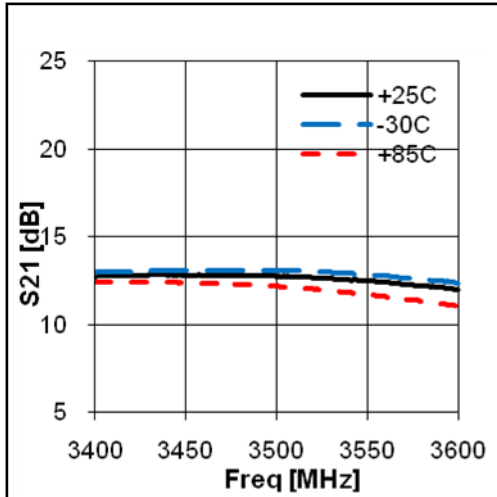

### Noise Figure Temperature Performance

(Vds = 5.0V, Ids = 25.0mA)


Freq	MHz	900	1900	2140	2450	3500
Temp [°C]	-40	0.78	0.96	0.98	0.92	1.20
	25	0.98	1.25	1.18	1.16	1.45
	85	1.12	1.45	1.48	1.45	1.65

# BL081

## 5-4000 MHz Wideband Low Noise Amplifier



### Package Outline Dimension

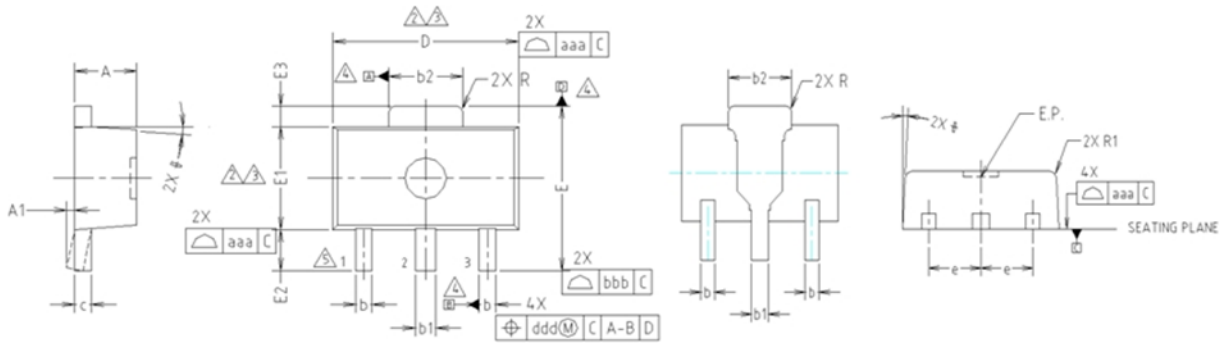


- NOTE:**  
 1. DIMENSIONS IN MILLIMETERS.
- ⚠ DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.5mm PER END. DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.5mm PER SIDE.
  - ⚠ DIMENSIONS D AND E1 ARE DETERMINED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
  - ⚠ DATUMS A, B AND D TO BE DETERMINED 0.18mm FROM THE LEAD TIP.
  - ⚠ TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	1.40	1.50	1.60	
A1	0.00	—	0.10	
b	0.38	0.42	0.48	
b1	0.48	0.52	0.58	
b2	1.79	1.82	1.87	
c	0.40	0.42	0.46	
D	4.40	4.50	4.70	2,3
E	3.70	4.00	4.30	
E1	2.40	2.50	2.70	2,3
E2	0.80	1.00	1.20	
E3	0.40	0.50	0.60	
e	1.50 TYP.			
φ	4° TYP.			
R	0.15 TYP.			
R1	—	—	0.20	
SYMBOL	TOLERANCES OF FORM AND POSITION		NOTE	
aaa	0.15			
bbb	0.20			
ccc	0.10			
ddd	0.10			

### Suggested PCB Land Pattern and PAD Layout


PCB Land Pattern

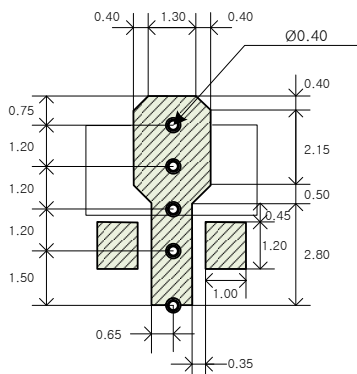

Note : All dimension \_ millimeters

PCB lay out \_ on BeRex website

PCB Mounting

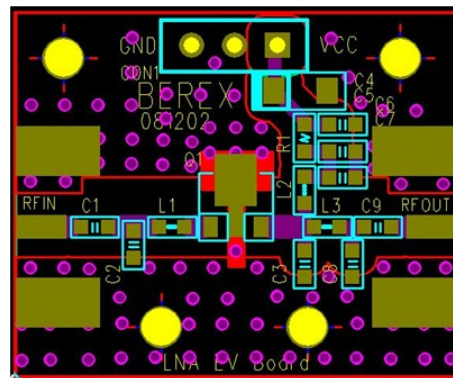


# BL081

5-4000 MHz Wideband Low Noise Amplifier



## Tape & Reel



Packaging information:

Tape Width (mm): 12

Reel Size (inches): 7

Device Cavity Pitch (mm): 8

Devices Per Reel: 1000

## Lead plating finish

100% Tin Matte finish

(All BeRex products undergoes a 1 hour, 150 degree C, Anneal bake to eliminate thin whisker growth concerns.)

## MSL / ESD Rating

<b>ESD Rating:</b>	Class 1A
<b>Value:</b>	<b>Passes &lt;500V</b>
<b>Test:</b>	Human Body Model (HBM)
<b>Standard:</b>	JEDEC Standard JESD22-A114B
<b>MSL Rating:</b>	<b>Level 1 at +265°C convection reflow</b>
<b>Standard:</b>	JEDEC Standard J-STD-020

## NATO CAGE code:

2	N	9	6	F
---	---	---	---	---