

## A-XMS&B-XLMS Series

1W, FIXED INPUT, ISOLATED&UNREGULATED DUAL/SINGLE OUTPUT, SUPERMINIATURE SIP PACKAGE





## **FEATURES**

- ◆RoHS compliant
- ◆Efficiency up to 80%
- ◆Miniature SIP Package Style
- ♦Wide temperature performance at full 1

Watt load,-40°C to 85 °C

- ♦UL 94V-0 package material
- ◆No heatsink required
- ◆Industry standard pinout
- ◆Power sharing on output

◆1KVDC isolation

- ◆Continuous Short Circuit Protection
- ◆Internal SMD construction
- ◆No external components required

## **MODEL SELECTION** B<sup>0</sup>05<sup>8</sup>05<sup>8</sup>X<sup>8</sup>LMS<sup>8</sup>

1)Product Series

2 Input Voltage

③Output Voltage

⑤Package Style

**4**Fixed Input

## **APPLICATIONS**

The A XMS&B XLMS Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation ≤ ±10%);
- 2) Where isolation is necessary between input and output (isolation voltage ≤1000VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.





SELECTION GUIDE								
	Input		Output			=	Switching	
Order code	Voltage(VDC)		Voltage	Current		Efficiency (%,Typ)	Frequency	
	Nominal	Range	(VDC)	Max	Min	(***, 31*)	(KHz,Typ)	
A0505XMS	5	4.5-5.5	±5	±100	±10	70	84	
A0509XMS	5	4.5-5.5	±9	±56	±6	75	81	
A0512XMS	5	4.5-5.5	±12	±42	±5	78	82	
A0515XMS	5	4.5-5.5	±15	±33	±4	79	83	
A1205XMS	12	10.8-13	±5	±100	±10	72	180	
A1209XMS	12	10.8-13	±9	±56	±6	75	150	
A1212XMS	12	10.8-13	±12	±42	±5	77	84	
A1215XMS	12	10.8-13	±15	±33	±4	79	83	
B0505XLMS	5	4.5-5.5	5	200	20	70	82	
B0509XLMS	5	4.5-5.5	9	111	12	75	83	
B0512XLMS	5	4.5-5.5	12	83	9	79	83	
B0515XLMS	5	4.5-5.5	15	67	7	80	80	
B1205XLMS	12	10.8-13	5	200	20	72	84	
B1209XLMS	12	10.8-13	9	111	12	75	81	
B1212XLMS	12	10.8-13	12	83	9	77	82	
B1215XLMS	12	10.8-13	15	67	7	79	83	
B2405XLMS	24	21.6-26	5	200	20	70	82	
B2409XLMS	24	21.6-26	9	111	12	73	83	
B2412XLMS	24	21.6-26	12	83	9	75	83	
B2415XLMS	24	21.6-26	15	67	7	78	80	
B2424XLMS	24	21.6-26	24	42	5	77	84	

ISOLATION SPECIFICATIONS						
Parameter	Test conditions	Min.	Тур.	Max.	Units	
Isolation test voltage	Flash tested for 1 minute and 1mA max	1000			VDC	
Isolation resistance	Test at Viso=500VDC	1000			МΩ	

OUTPUT SPECIFICATIONS							
Parameter	Test conditions	Min.	Тур.	Max	Unit		
Output power		0.1		1	W		
Line regulation	For Vin change of 1%			1.2			
Load regulation	10% to 100% full load(5V output)		10	15			
	10% to 100% full load(9V output)		8.3	10	%		
	10% to 100% full load(12V output)		6.8	10	70		
	10% to 100% full load(15V output)		6.3	10			
	10% to 100% full load(24V output)		5	10			
Output voltage		See	See tolerance envelope graph				
Temperature drift	100% full load		0.03 %/		%/°C		
Output Ripple&Noise*	20MHz Bandwidth(A-XMS)		50	75	MV		
	20MHz Bandwidth(B-XLMS)		75	100	р-р		
Switching frequency	100% load, nominal input(5V,12V)		100		Khz		
	100% load, nominal input(24V)		500		MIZ		


<sup>\*</sup> Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.




# A-XMS&B-XLMS Series


#### **COMMON SPECIFICATIONS** Conditions Min. Тур. Max Units Parameter 95 Storage humidity range 85 Operating temperature -40 125 Storage temperature -55 °C Lead temperature 1.5mm from case for 10 seconds 300 Temp.rise at full load 15 25 Cooling Free air convection Plastic(UL94-V0) Case material Continuous Short circuit protection MTBF 3500 K hours Weight

## **TYPICAL CHARACTERISTICS**

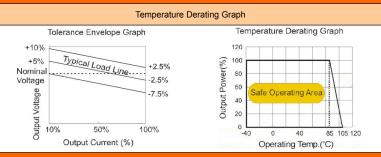

## **OUTLINE DIMENSIONS & PIN CONNECTIONS**





### RECOMMENDED FOOTPRINT Top view,grid:2.54mm(0.1inch) diameter: 1.00mm(0.039inch) Single φ п 1 2 4 6 Dual φ Ф -ф 11 2 4 5 6

FOOTPRINT DETAILS				
Pin	Single	Dual		
1	VIN	VIN		
2	GND	GND		
4	0V	-Vo		
5	NC	0V		
6	+Vo	+Vo		

N C - Not available for electrical connection.

### Requirement on output load

To ensure this module can operate efficiently and reliably, a minimum load is specified for this kind of DC/DC converter in addition to a maximum load(namely full load). During operation, make sure the specified range of input voltage is not exceeded, the minimum output load is not less than 10% of the full load, and that this product should **never be operated under no load!** 

# SRI Industry Power Family

Microdo Professional Power Module Inc. Tel:0086-20-86000646 E-mail:tech@microdc.cn Website:http://www.microdc.cn



## **ROHS COMPLIANT INFORMATION**

This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300° C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.



#### REACH COMPLIANT INFORMATION


This series has proven that this product does not contain harmful chemicals, it also has harmful chemical substances through the registration, inspection and approval

#### Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

#### Recommended testing and application circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).



It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).


#### **EXTERNAL CAPACITOR TABLE (TABLE 1)**

Vin	Cin	Single Vout	Cout	Dual Vout	Cout
(VDC)	(µF)	(VDC)	(µF)	(VDC)	(µF)
5	47	5	10	±5	4.7
12	2.2	9	4.7	±9	2.2
24	1.0	12	2.2	±12	1.0
		15	1	±15	0.47

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

## Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat that is connected to the input or output end in series (Figure 2).



When the environment temperature is higher than 71°C, the product output power should be less than 60% of the rated power.

No parallel connection or plug and play.

<sup>\*</sup>Supply voltage must be discontinued at the end of short circuit duration.