

Product Preview
ADSL Line Driver


The MC03AX1456 ADSL Line Driver provides a single chip analog front end to interface the ADSL Transceiver to the line transformer.

The MC03AX1456CO is designed to fulfill the central office requirements. The MC03AX1456RT is optimized for use at the remote terminal (i.e. consumer premises). The ADSL Line Driver provides three differential ports: a transmit and a receive port to interface to the ADSL Transceiver's transmit and receive ports, respectively; and a bidirectional line port.

The transmit port incorporates a high-pass filter and a programmable gain stage with three settings. The receive port incorporates a programmable HF boost and a programmable gain stage, each with three settings, as well as a high pass-filter.


- Hybrid balance for echo cancellation
- Defined termination impedance to the line
- Programmable transmit gain (3 settings)
- Programmable receive gain (3 setting)
- Programmable HF boost (3 setting)
- Transmit band for CO is 26KHz-1104KHz
- Transmit band for the RT is 26KHz-138KHz
- Frequency ripple <0.5dB (CO and RT)
- Standby mode for lower power dissipation (CO and RT)
- ±15V ±10% supply voltages
- 30-pin HSOP package

MC03AX1456CO
MC03AX1456RT



HSOP PACKAGE
CASE 979A-02

ADSL System Block Diagram

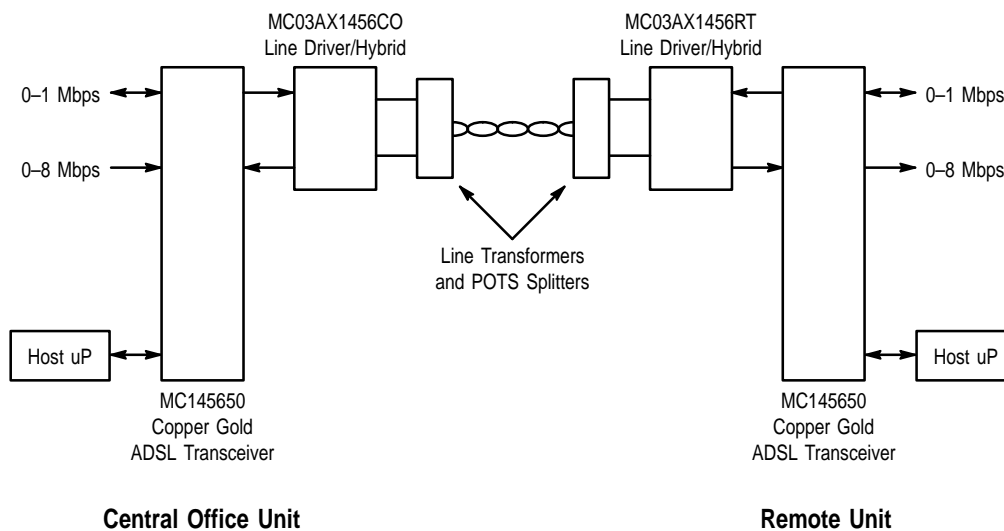

This document contains information on a product under development. Motorola reserves the right to change or discontinue this product without notice.



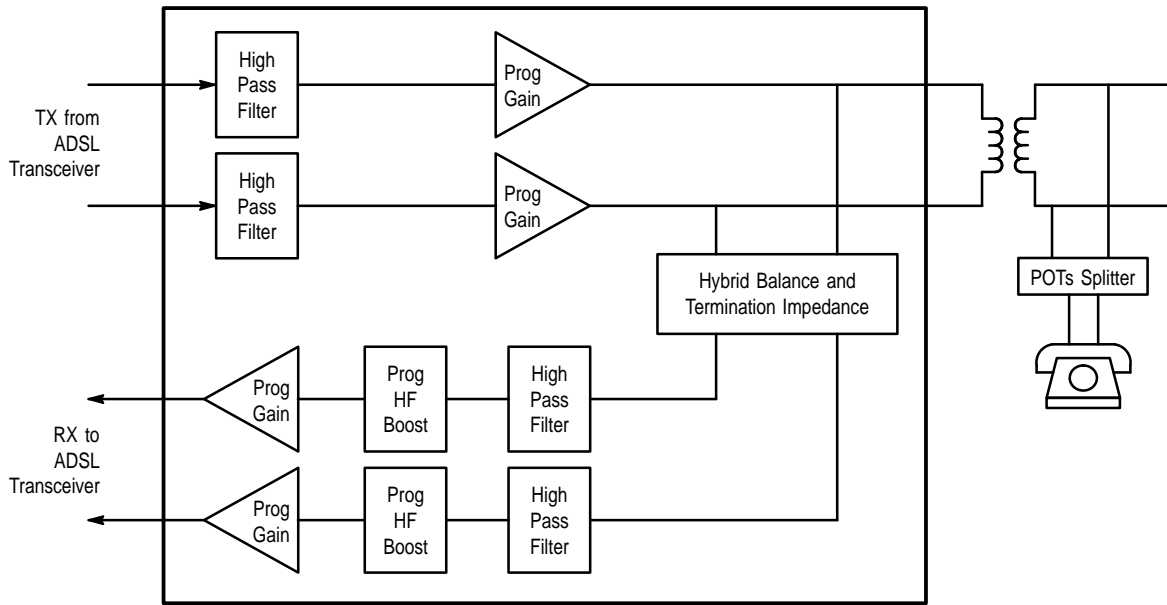


Figure 1. Functional Block Diagram of the MC03AX1456 Line Driver

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
V _{CC}	Positive Supply Voltage (Referenced to GND)	+18	V
V _{EE}	Negative Supply Voltage (Referenced to GND)	-18	V
V _{IN}	Input Voltage (Referenced to GND)	TBD	V
V _{OUT}	Output Voltage (Referenced to GND)	TBD	V
I _{IN}	Input Current	TBD	mA
I _{OUT}	Output Current	TBD	mA
T _{STG}	Storage Temperature Range	-65 to +150	°C


* Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the Recommended Operating Conditions.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Typ	Max	Unit
V _{CC}	Positive Supply Voltage	+13.5	+15.0	+16.5	V
V _{-Sup}	Negative Supply Voltage	-13.5	-15.0	-16.5	V
T _J	Junction Temperature			150	°C


OUTLINE DIMENSIONS

HSOP PACKAGE
CASE 979A-02
ISSUE A

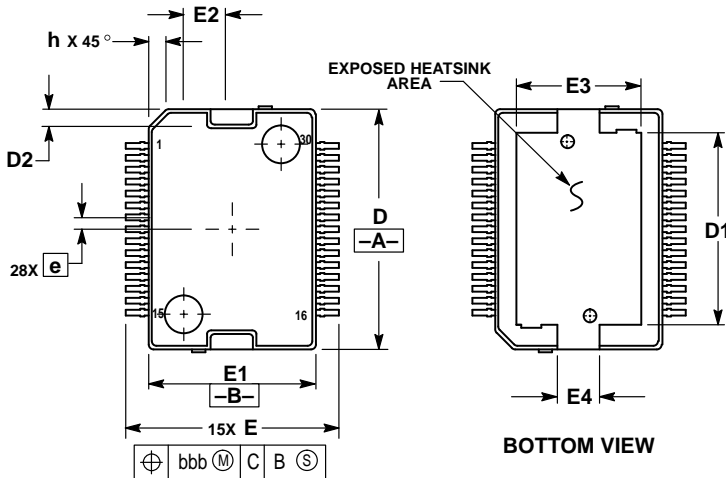

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETER.
 3. DATUM PLANE -H- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
 4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.150 (0.006) PER SIDE. DIMENSIONS D AND E1 DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
 5. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE b DIMENSION AT MAXIMUM MATERIAL CONDITION.
 6. DATUMS -A- AND -B- TO BE DETERMINED AT DATUM PLANE -H-.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	3.100	3.450	0.122	0.136
A1	0.050	0.200	0.002	0.008
A2	3.050	3.250	0.120	0.128
D	15.800	16.000	0.622	0.630
D1	12.270	12.470	0.483	0.491
D2	0.900	1.100	0.035	0.043
E	13.950	14.450	0.549	0.569
E1	10.900	11.100	0.429	0.437
E2	2.500	2.700	0.098	0.106
E3	7.000	7.200	0.276	0.284
E4	2.700	2.900	0.106	0.114
L	0.840	1.100	0.033	0.043
L1	0.350 BSC		0.014 BSC	
b	0.350	0.475	0.014	0.019
b1	0.350	0.432	0.014	0.017
c	0.230	0.320	0.009	0.013
c1	0.230	0.280	0.009	0.011
e	0.800 BSC		0.031 BSC	
h	1.100		0.043	
θ	0°	8°	0°	8°
aaa	0.200		0.008	
bbb	0.200		0.008	
ccc	0.100		0.004	

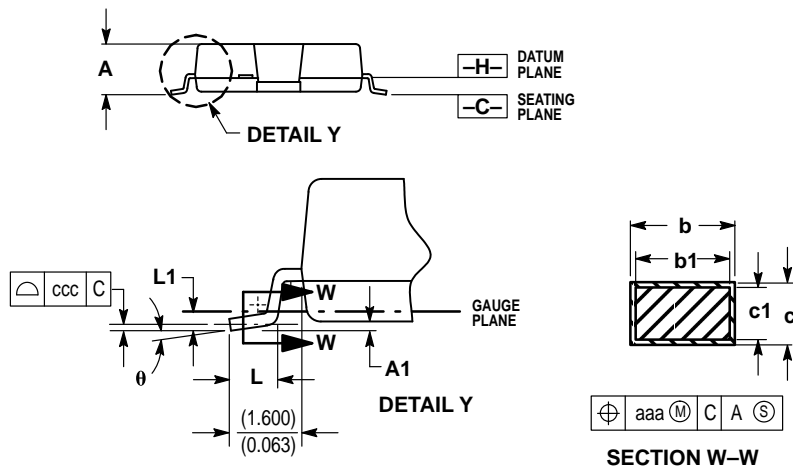

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447 or 602-303-5454

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609
INTERNET: http://Design-NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-81-3521-8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

