

Coaxial

Voltage Controlled Oscillator

ZX95-2435+

Low Noise 2425 to 2435 MHz

Features

- linear tuning characteristics
- very low phase noise
- very low pushing
- low pulling
- protected by US patent 6,790,049



CASE STYLE: GB956

| Connectors | Model |
|------------|--------------|
| SMA | ZX95-2435-S+ |

Applications

- r & d
- lab
- instrumentation
- wireless communications
- outdoor terminal

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

| MODEL NO. | FREQ. (MHz) | | POWER OUTPUT (dBm) | PHASE NOISE | | | | TUNING | | | | | NON HARMONIC SPURIOUS (dBc) | HARMONICS (dBc) | | PULLING pk-pk @ 12 dB (MHz) | PUSHING (MHz/V) | DC OPERATING POWER | |
|------------|-------------|------|--------------------|---------------------------------------|------|------|------|-------------------|----------------------|---------------|---------------------------------|------|-----------------------------|-----------------|------|-----------------------------|-----------------|--------------------|--------------|
| | | | | dBc/Hz SSB at offset frequencies, kHz | | | | VOLTAGE RANGE (V) | SENSI-TIVITY (MHz/V) | PORT CAP (pF) | 3 dB MODULATION BANDWIDTH (MHz) | Typ. | | Typ. | Max. | | | Vcc (volts) | Current (mA) |
| | | | | Typ. | 1 | 10 | 100 | | | | | | | | | | | | |
| ZX95-2435+ | 2425 | 2435 | +7 | -87 | -115 | -135 | -156 | 0.5 | 4.5 | 16 | 20 | 130 | -90 | -20 | -10 | 1 | 0.04 | 8 | 32 |

Maximum Ratings


| | |
|--------------------------------------|----------------|
| Operating Temperature | -55°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Absolute Max. Supply Voltage (Vcc) | 9V |
| Absolute Max. Tuning Voltage (Vtune) | 7V |
| All specifications | 50 ohm system |

Permanent damage may occur if any of these limits are exceeded.



NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminals. See Application Note AN-40-10.

Outline Drawing

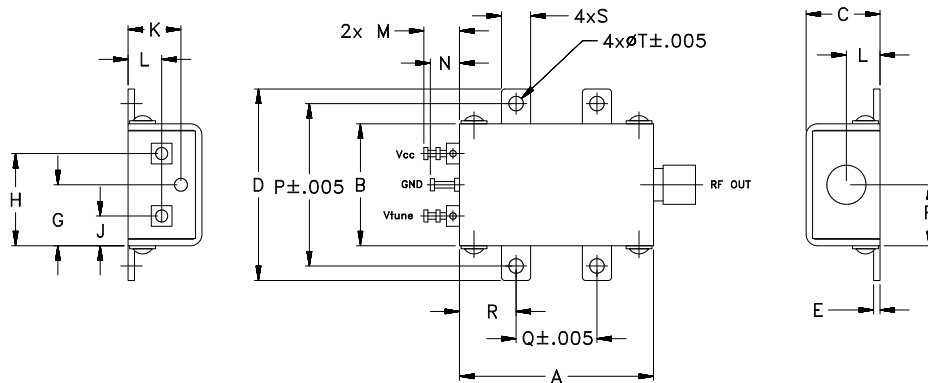

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J | K | L | M | N | P | Q | R | S | T | wt. |
|-------|-------|-------|-------|------|------|------|-------|------|------|------|------|------|-------|-------|------|------|------|-------|
| 1.20 | .75 | .46 | 1.18 | .04 | .38 | .38 | .57 | .18 | .33 | .21 | .22 | .18 | 1.00 | .50 | .35 | .18 | .106 | grams |
| 30.48 | 19.05 | 11.68 | 29.97 | 1.02 | 9.65 | 9.65 | 14.48 | 4.57 | 8.38 | 5.33 | 5.59 | 4.57 | 25.40 | 12.70 | 8.89 | 4.57 | 2.69 | 35.0 |

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com







REV. B
M152326
EDR-7895/1F2
ZX95-2435+
RAV
151016
Page 1 of 2

Performance Data & Curves*

ZX95-2435+

| V TUNE | TUNE SENS (MHz/V) | FREQUENCY (MHz) | | | POWER OUTPUT (dBm) | | | Icc (mA) | HARMONICS (dBc) | | | FREQ. PUSH (MHz/V) | FREQ. PULL (MHz) | PHASE NOISE (dBc/Hz) at offsets | | | | FREQ OFFSET (KHz) | PHASE NOISE at 2430 MHz (dBc/Hz) |
|--------|-------------------|-----------------|--------|--------|--------------------|-------|-------|----------|-----------------|-------|-------|--------------------|------------------|---------------------------------|--------|--------|--------|-------------------|----------------------------------|
| | | -55°C | +25°C | +85°C | -55°C | +25°C | +85°C | | F2 | F3 | F4 | | | 1kHz | 10kHz | 100kHz | 1MHz | | |
| 0.00 | 19.28 | 2395.8 | 2392.7 | 2389.5 | 6.24 | 6.16 | 4.80 | 26.49 | -22.2 | -37.1 | -45.4 | 0.02 | 1.42 | -86.2 | -113.7 | -136.9 | -155.8 | 1.0 | -87.32 |
| 0.25 | 17.73 | 2400.3 | 2397.6 | 2394.5 | 6.35 | 6.29 | 4.99 | 26.53 | -21.8 | -35.8 | -45.7 | 0.00 | 1.45 | -86.0 | -114.1 | -135.5 | -155.3 | 2.0 | -96.10 |
| 0.50 | 16.83 | 2404.6 | 2402.0 | 2399.0 | 6.45 | 6.41 | 5.14 | 26.56 | -21.5 | -35.1 | -45.4 | 0.01 | 1.45 | -87.2 | -114.3 | -135.0 | -155.5 | 3.5 | -103.52 |
| 0.70 | 16.40 | 2407.9 | 2405.4 | 2402.4 | 6.52 | 6.50 | 5.25 | 26.58 | -21.4 | -34.9 | -45.8 | 0.02 | 1.43 | -87.9 | -113.9 | -135.4 | -155.9 | 6.0 | -109.88 |
| 1.00 | 15.98 | 2412.7 | 2410.3 | 2407.4 | 6.62 | 6.62 | 5.40 | 26.61 | -21.2 | -35.5 | -45.7 | 0.03 | 1.38 | -86.9 | -114.6 | -134.8 | -156.3 | 8.4 | -113.12 |
| 1.25 | 15.81 | 2416.6 | 2414.3 | 2411.4 | 6.69 | 6.70 | 5.51 | 26.63 | -21.0 | -36.4 | -45.5 | 0.03 | 1.30 | -87.1 | -114.9 | -134.4 | -155.9 | 10.0 | -115.27 |
| 1.50 | 15.77 | 2420.5 | 2418.2 | 2415.4 | 6.75 | 6.77 | 5.60 | 26.65 | -20.9 | -35.5 | -45.4 | 0.04 | 1.20 | -87.4 | -115.0 | -134.5 | -155.7 | 19.4 | -121.69 |
| 1.75 | 15.84 | 2424.5 | 2422.2 | 2419.3 | 6.80 | 6.83 | 5.68 | 26.67 | -20.8 | -34.7 | -45.6 | 0.04 | 1.07 | -86.9 | -115.4 | -135.7 | -156.3 | 32.5 | -125.34 |
| 2.00 | 15.97 | 2428.4 | 2426.1 | 2423.3 | 6.87 | 6.89 | 5.74 | 26.68 | -20.7 | -34.5 | -45.8 | 0.05 | 0.92 | -88.2 | -115.1 | -133.9 | -155.7 | 53.5 | -128.22 |
| 2.25 | 16.14 | 2432.4 | 2430.1 | 2427.3 | 6.94 | 6.97 | 5.81 | 26.70 | -20.5 | -35.1 | -45.1 | 0.05 | 0.76 | -87.5 | -115.4 | -135.2 | -155.8 | 75.2 | -131.44 |
| 2.50 | 16.35 | 2436.4 | 2434.1 | 2431.3 | 7.00 | 7.03 | 5.88 | 26.71 | -20.3 | -36.2 | -44.1 | 0.05 | 0.79 | -86.6 | -115.3 | -134.7 | -156.6 | 100.0 | -134.91 |
| 2.75 | 16.59 | 2440.6 | 2438.2 | 2435.4 | 7.05 | 7.09 | 5.95 | 26.71 | -20.2 | -35.8 | -44.7 | 0.05 | 0.82 | -86.0 | -115.2 | -135.2 | -157.3 | 207.9 | -141.49 |
| 3.00 | 16.79 | 2444.7 | 2442.4 | 2439.5 | 7.10 | 7.14 | 6.00 | 26.71 | -20.2 | -35.5 | -45.0 | 0.05 | 0.83 | -87.1 | -115.2 | -135.2 | -156.5 | 248.5 | -143.69 |
| 3.25 | 16.91 | 2448.9 | 2446.6 | 2443.7 | 7.14 | 7.19 | 6.05 | 26.71 | -20.3 | -35.9 | -44.9 | 0.04 | 0.92 | -87.1 | -115.0 | -134.4 | -156.1 | 348.8 | -146.63 |
| 3.50 | 16.89 | 2453.2 | 2450.8 | 2447.9 | 7.19 | 7.23 | 6.08 | 26.71 | -20.5 | -36.9 | -44.2 | 0.02 | 1.15 | -85.5 | -114.9 | -134.8 | -155.8 | 409.6 | -147.80 |
| 3.75 | 16.73 | 2457.4 | 2455.0 | 2452.2 | 7.23 | 7.28 | 6.12 | 26.70 | -20.8 | -38.9 | -44.5 | 0.02 | 1.36 | -86.5 | -114.3 | -135.3 | -155.7 | 489.7 | -149.94 |
| 4.00 | 16.40 | 2461.6 | 2459.2 | 2456.4 | 7.27 | 7.31 | 6.16 | 26.68 | -20.8 | -38.3 | -45.1 | 0.07 | 1.54 | -85.3 | -114.7 | -135.1 | -155.7 | 575.0 | -151.57 |
| 4.25 | 15.89 | 2465.7 | 2463.3 | 2460.6 | 7.31 | 7.35 | 6.19 | 26.66 | -21.0 | -37.7 | -45.1 | 0.13 | 1.67 | -85.1 | -114.1 | -136.3 | -155.2 | 807.2 | -153.95 |
| 4.50 | 15.22 | 2469.6 | 2467.3 | 2464.6 | 7.33 | 7.38 | 6.20 | 26.65 | -21.2 | -38.5 | -44.4 | 0.19 | 1.75 | -85.0 | -113.5 | -134.2 | -155.3 | 1000.0 | -155.61 |

*at 25°C unless mentioned otherwise

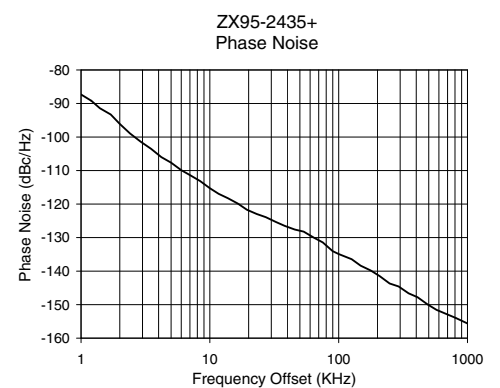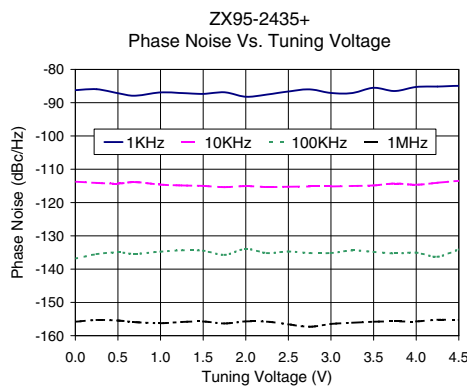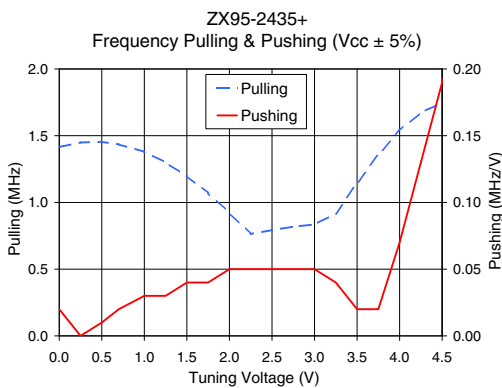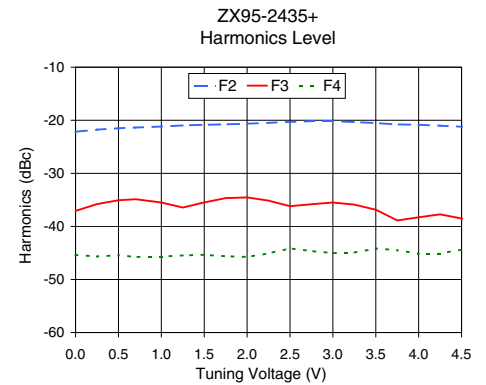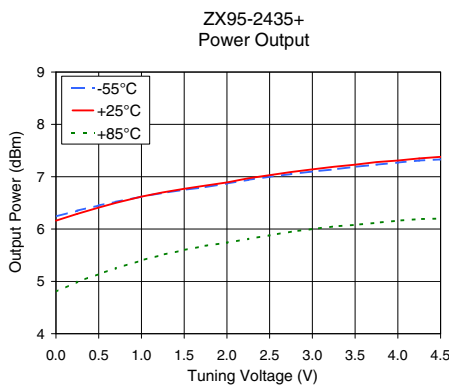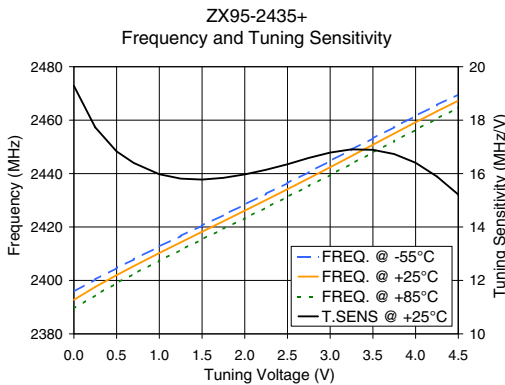

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

