


ACMD-6007

LTE Band 7 Duplexer



Data Sheet



Description

The Avago ACMD-6007 is a highly miniaturized duplexer designed for use in LTE Band 7 (2500 – 2570 MHz UL, 2620 – 2690 MHz DL) handsets and mobile data terminals.


Low Insertion Loss in the Tx channel minimizes current drain from the power amplifier, while low Rx channel Insertion Loss improves receiver sensitivity.

The ACMD-6007 enhances the sensitivity and dynamic range of handset receivers by providing high isolation of the transmitted signal from the receiver input and high rejection of transmit-generated noise in the receive band.

The ACMD-6007 is designed with Avago Technologies' innovative Film Bulk Acoustic Resonator (FBAR) technology, which makes possible ultra-small, high-Q filters at a fraction of their usual size. The excellent power handling capability of FBAR bulk-mode resonators supports the high output power levels used in mobile communications applications, while adding virtually no distortion.

The ACMD-6007 also utilizes Avago Technologies' advanced Microcap bonded-wafer, chip scale packaging technology. This process allows the filters to be assembled into a molded chip-on-board module with an overall maximum size of only 2.0 x 2.5 mm and maximum height of 0.95 mm. The ACMD-6007 is compatible with standard 2.0 x 2.5 mm duplexer PCB footprints.

Functional Block Diagram

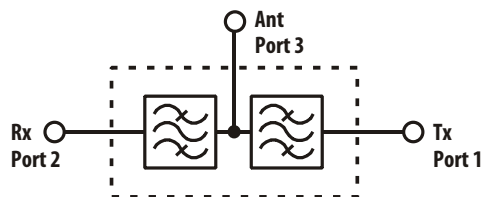

Features

- Miniature Size
 - 2.0 x 2.5 mm Max size
 - 0.95 mm Max Height
 - Standard 2 x 2.5 mm PCB footprint
- High Isolation
- High Power Rating
 - 33 dBm Abs Max Tx Power
- Environmental
 - RoHS Compliant
 - Halogen free
 - TBBPA Free

Specifications

- Rx Band Performance, 2620-2690 MHz, -20 to +85°C
 - Insertion Loss: 2.5 dB Max
 - Rx Noise Blocking: 50 dB Min
- Tx Band Performance, 2500-2570 MHz, -20 to +85°C
 - Insertion Loss: 2.1 dB Max
 - Tx Interferer Blocking: 55 dB Min

Applications

LTE Handsets or data terminals operating in the Band 7 frequency range.

ACMD-6007 Electrical Specifications ^[2], $Z_0=50\ \Omega$, T_c ^[1] as indicated

Symbol	Parameter	Units	-20°C			+25°C			+85°C		
			Min	Typ ^[3]	Max	Min	Typ ^[3]	Max	Min	Typ ^[3]	Max
Antenna Port to Receive Port											
S23	Insertion Loss in Receive Band (2620 – 2690 MHz)	dB			2.5		1.6	2.5			2.5
S22	Return Loss (SWR) of Receive Port in Receive Band (2620 – 2690 MHz)	dB	9.5		(2.0)	9.5	17 (1.3)	(2.0)	9.5		(2.0)
S23	Attenuation in Transmit Band (2500 – 2570 MHz)	dB	45			45	57		45		
S23	Attenuation, 1 – 2380 MHz	dB	30			30	32		30		
S23	Attenuation, 2380 – 2450 MHz	dB	35			35	48		35		
S23	Attenuation, 2450 – 2484 MHz	dB	35			35	51		35		
S23	Attenuation, 2775 – 6000 MHz	dB	20			20	38		20		
Transmit Port to Antenna Port											
S31	Insertion Loss in Transmit Band (2500 – 2570 MHz)	dB			2.0		1.8	2.0			2.1
S11	Return Loss (SWR) of Transmit Port in Transmit Band (2500 – 2570 MHz)	dB	10		(1.9)	10	18 (1.3)	(1.9)	10		(1.9)
S31	Attenuation in Receive Band (2620 – 2690 MHz)	dB	45			45	58		45		
S31	Attenuation, 10 – 1574 MHz	dB	30			30	42		30		
S31	Attenuation in GPS Rx Band (1574.42 – 1576.42 MHz)	dB	45			45	57		45		
S31	Attenuation, 1577 – 1680 MHz	dB	25			25	50		25		
S31	Attenuation, 1845 – 1880 MHz	dB	30			30	42		30		
S31	Attenuation, 2110 – 2170 MHz	dB	30			30	34		30		
S31	Attenuation, 2400 – 2450 MHz	dB	30			30	57		30		
S31	Attenuation in Transmit 2 nd Harmonic Band (5000 – 5140 MHz)	dB	20			20	39		20		
S31	Attenuation, 5150 – 5850 MHz	dB	20			20	35		20		
S31	Attenuation, 7500 – 7710 MHz	dB	20			20	37		20		
Antenna Port											
S33	Return Loss (SWR) of Ant Port in Rx Band (2620 – 2690 MHz)	dB	10		(1.9)	10	18 (1.3)	(1.9)	10		(1.9)
S33	Return Loss (SWR) of Ant Port in Tx Band (2500 – 2570 MHz)	dB	10		(1.9)	10	16 (1.3)	(1.9)	10		(1.9)
Isolation Transmit Port to Receive Port											
S21	Tx-Rx Isolation in Receive Band (2620 – 2690 MHz)	dB	50			50	58		50		
S21	Tx-Rx Isolation in Transmit Band (2500 – 2570 MHz)	dB	55			55	61		55		

Notes:

1. T_c is the case temperature and is defined as the temperature of the underside of the Duplexer where it makes contact with the circuit board.
2. Min/Max specifications are guaranteed at the indicated temperature with the input power to the Tx ports equal to or less than +29 dBm over all Tx frequencies unless otherwise noted.
3. Typical data is the average value of the parameter over the indicated band at the specified temperature. Typical values may vary over time.

Absolute Maximum Ratings^[1]

Parameter	Unit	Value
Storage temperature	°C	-65 to +125
Maximum RF Input Power to Tx Port	dBm	+33

Maximum Recommended Operating Conditions^[2]

Parameter	Unit	Value
Operating temperature, T_C ^[3] , Tx Power \leq 29 dBm, CW	°C	-40 to +100
Operating temperature, T_C ^[3] , Tx Power \leq 30 dBm, CW	°C	-40 to +85

Notes:

1. Operation in excess of any one of these conditions may result in permanent damage to the device.
2. The device will function over the recommended range without degradation in reliability or permanent change in performance, but is not guaranteed to meet electrical specifications.
3. T_C is defined as case temperature, the temperature of the underside of the duplexer where it makes contact with the circuit board.

ACMD-6007 Typical Performance at $T_C = 25^\circ\text{C}$

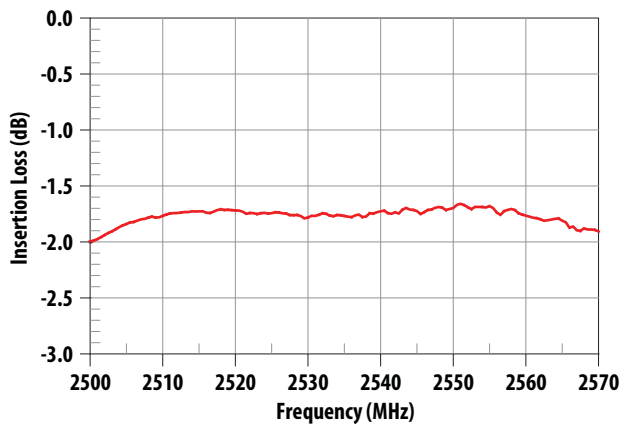


Figure 1. Tx-Ant Insertion Loss.

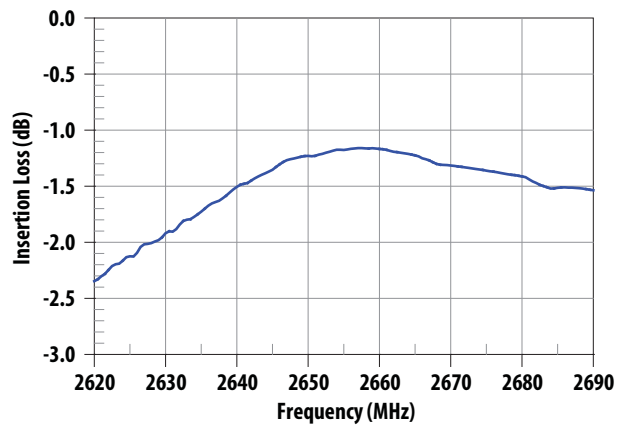


Figure 2. Ant-Rx Insertion Loss.

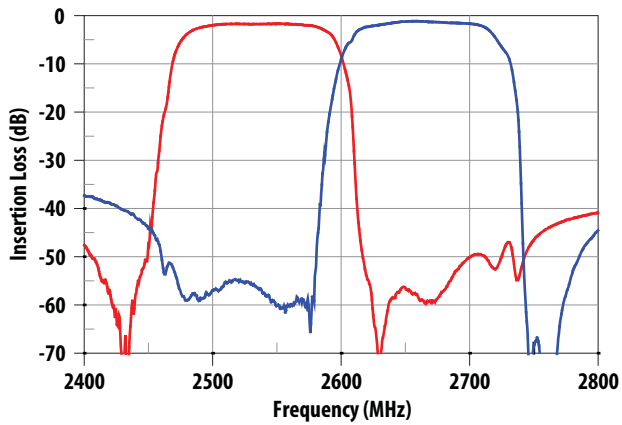


Figure 3. Tx Rejection in Rx Band and Rx Rejection in Tx Band.

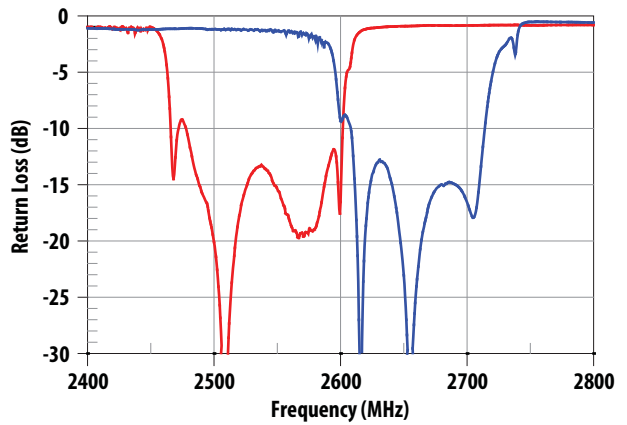


Figure 4. Tx and Rx Port Return Loss.

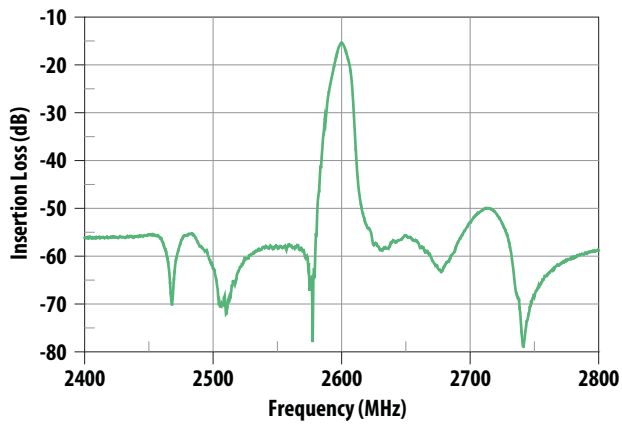


Figure 5. Tx-Rx Isolation.

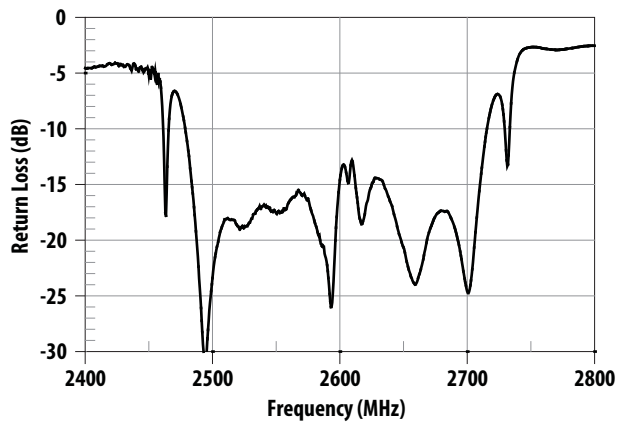


Figure 6. Antenna Port Return Loss.

ACMD-6007 Typical Performance at $T_c = 25^\circ\text{C}$

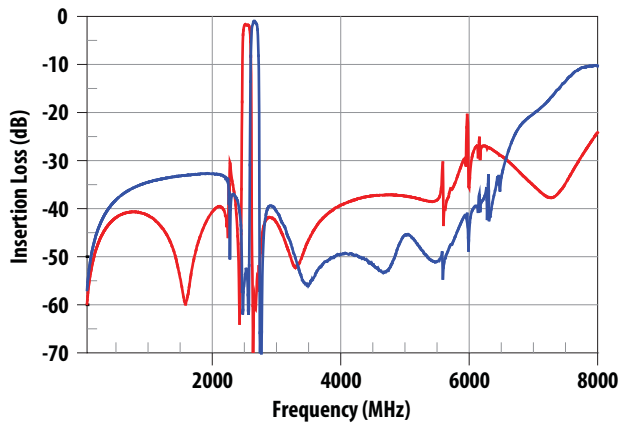


Figure 7. Tx-Ant and Ant-Rx Wideband Insertion Loss.

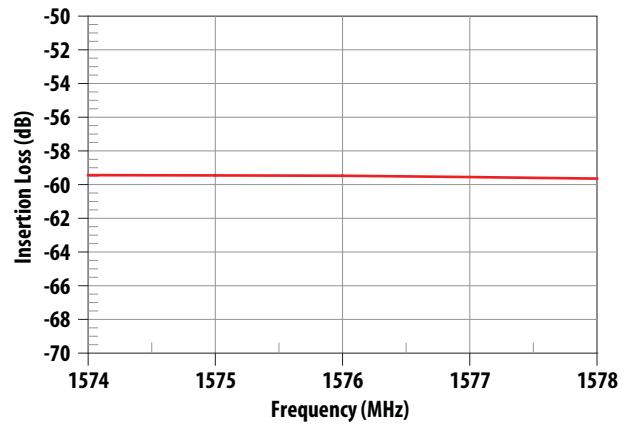


Figure 8. Tx-Ant Rejection in GPS Band.

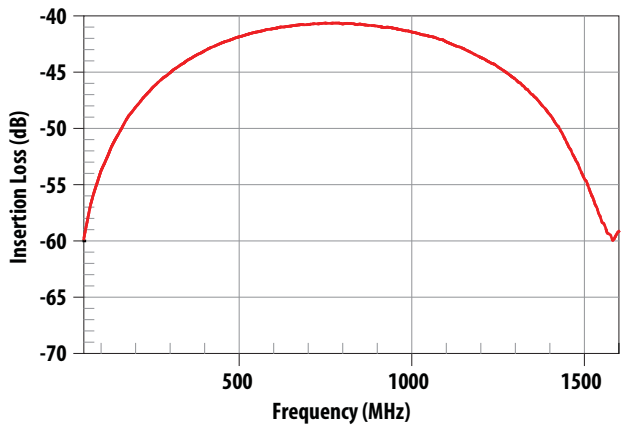


Figure 9. Tx-Ant Low Frequency Rejection, 50 - 1574 MHz.

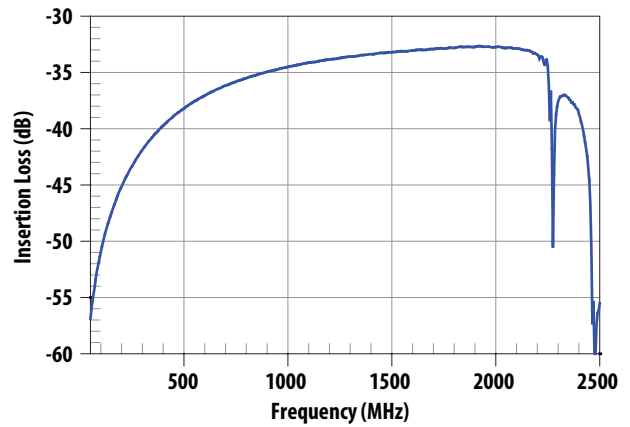


Figure 10. Ant-Rx Low Frequency Rejection, 50 - 2500 MHz.

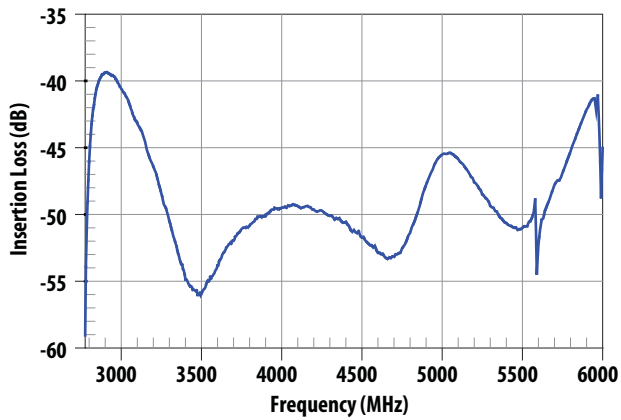


Figure 11. Ant-Rx Rejection, 2775 - 6000.

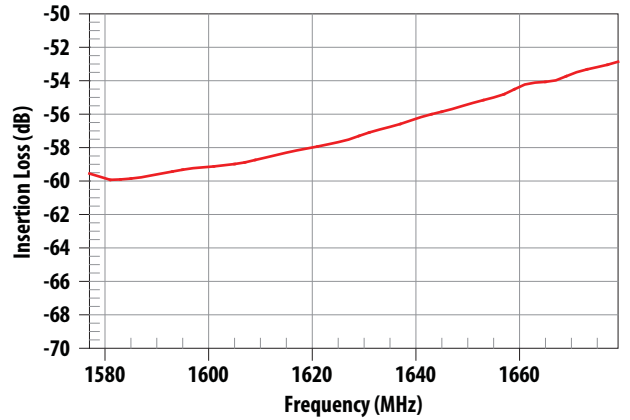


Figure 12. Tx-Ant Low Frequency Rejection, 1577 - 1680 MHz.

ACMD-6007 Typical Performance at $T_c = 25^\circ\text{C}$

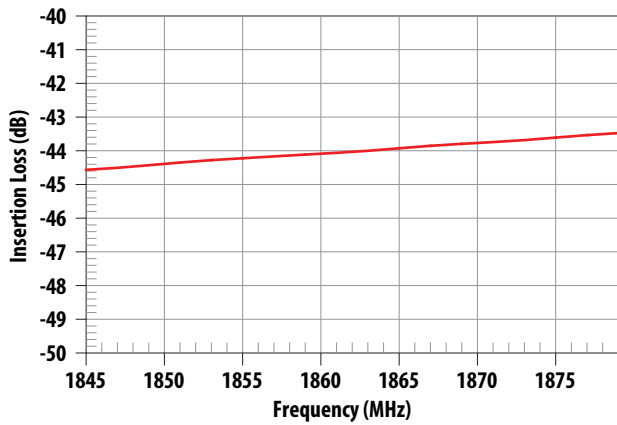


Figure 13. Tx-Ant Low Frequency Rejection, 1845 – 1880 MHz.

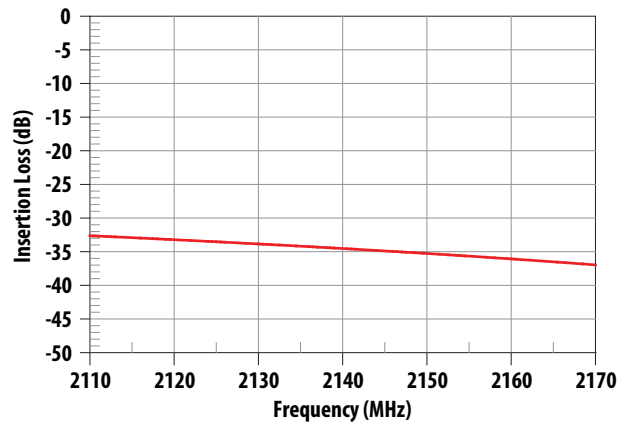


Figure 14. Tx-Ant Low Frequency Rejection, 2110 – 2170 MHz.

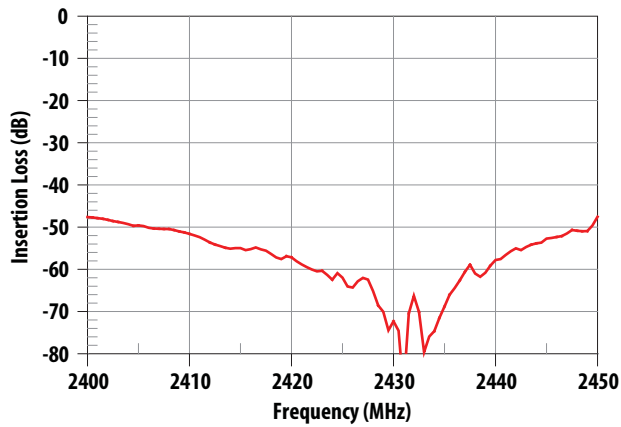


Figure 15. Tx-Ant Low Frequency Rejection, 2400 – 2450 MHz.

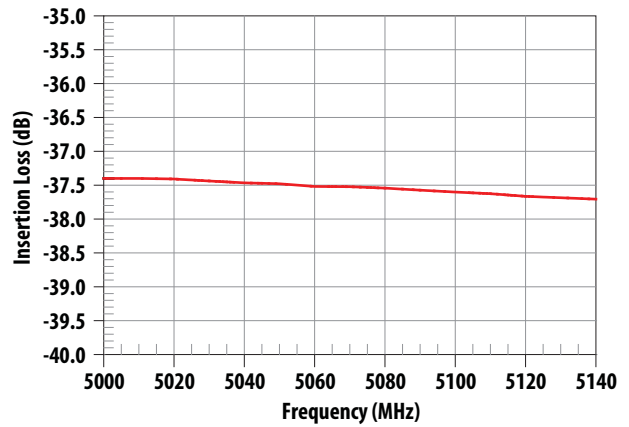


Figure 16. Tx-Ant Low Frequency Rejection at Tx 2nd Harmonic, 5000 – 5140 MHz.

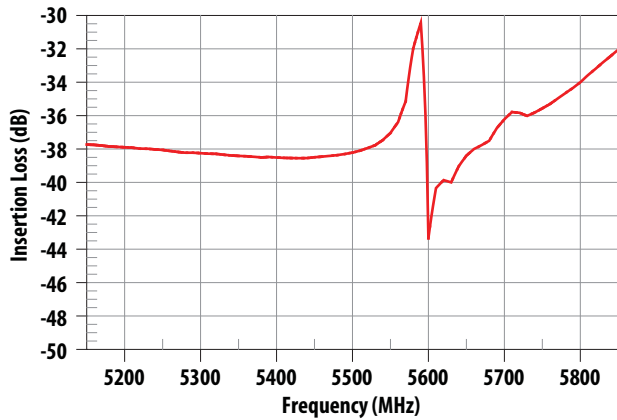


Figure 17. Tx-Ant Low Frequency Rejection, 5150 – 5850 MHz.

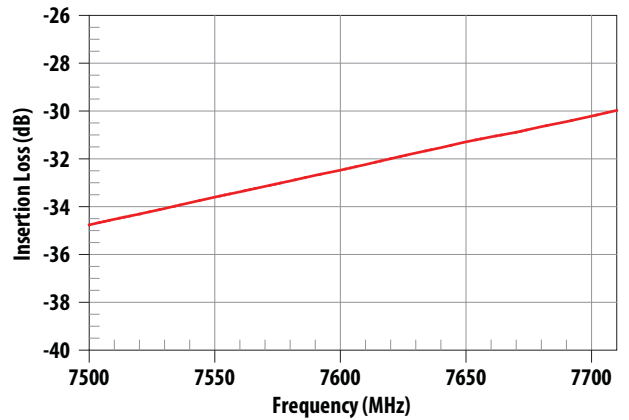


Figure 18. Tx-Ant Low Frequency Rejection, 7500 – 7710 MHz.

ACMD-6007 Typical Performance at $T_c = 25^\circ\text{C}$

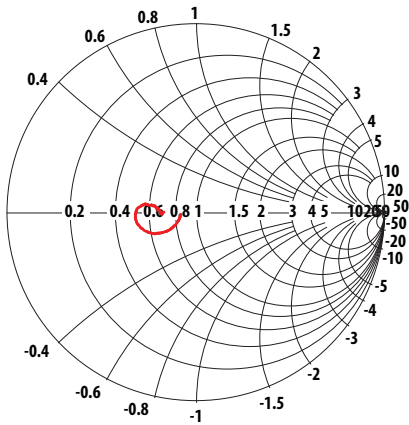


Figure 19. Tx Port Impedance in Tx Band.

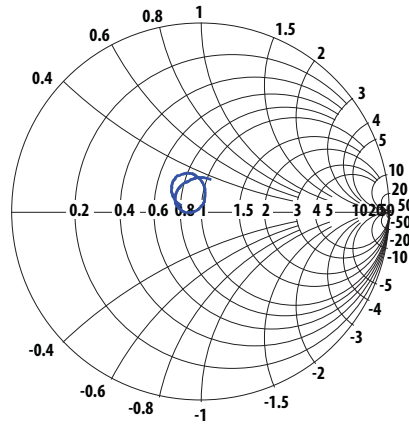


Figure 20. Rx Port Impedance in Rx Band.

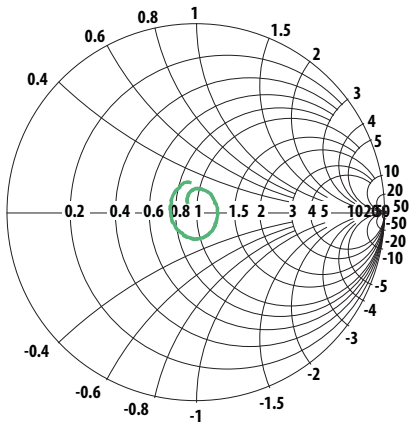


Figure 21. Ant Port Impedance in Tx Band.


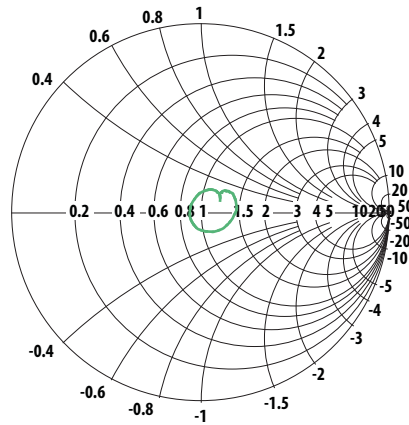


Figure 22. Ant Port Impedance in Rx Band.

ACMD-6007

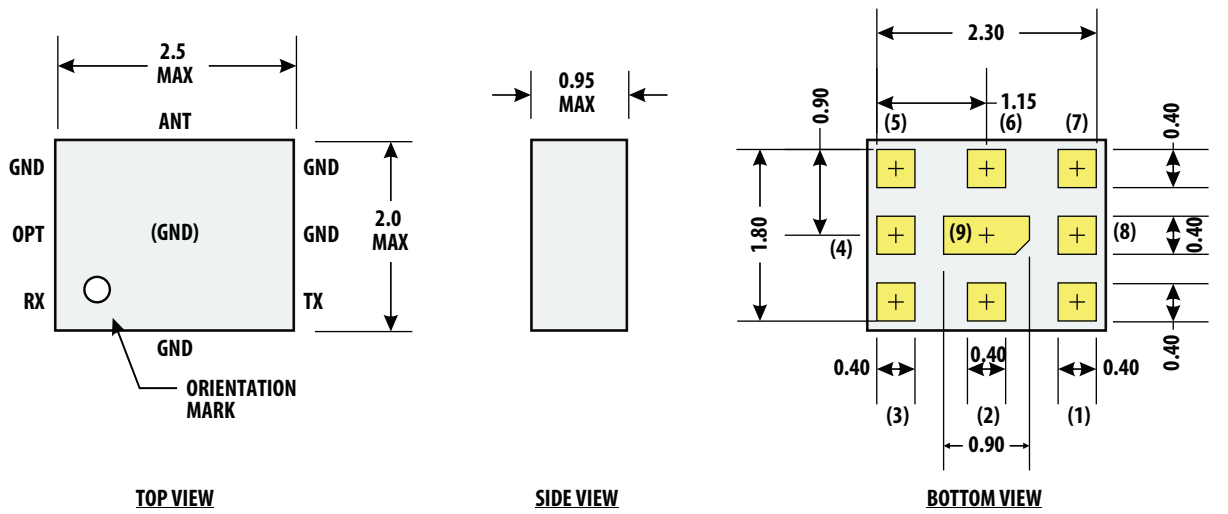

Notes:

1. Dimensions in millimeters
Tolerance: X.X ± 0.1 mm
X.XX ± 0.05 mm
2. Dimensions nominal unless otherwise noted
3. Angles 45° nominal
4. I/O Pads (3 ea)
Size: 0.40 X 0.40 mm
Spacing to ground metal: 0.30 mm
5. Contact areas are gold plated

Pin Connections:

- | | |
|---------------|----------------------------|
| 1 | Rx |
| 2, 4, 5, 7, 9 | Gnd |
| 3 | Tx |
| 6 | Ant |
| 8 | Optional: Gnd, NC or Rx(-) |

Figure 23. Package Outline Drawing.

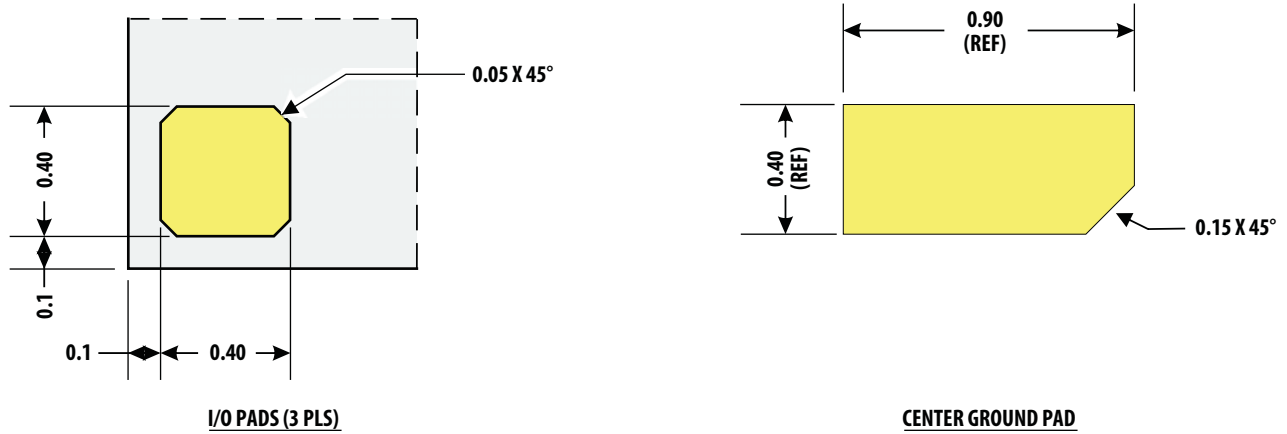


Figure 24. Pad Detail.

ACMD-6007

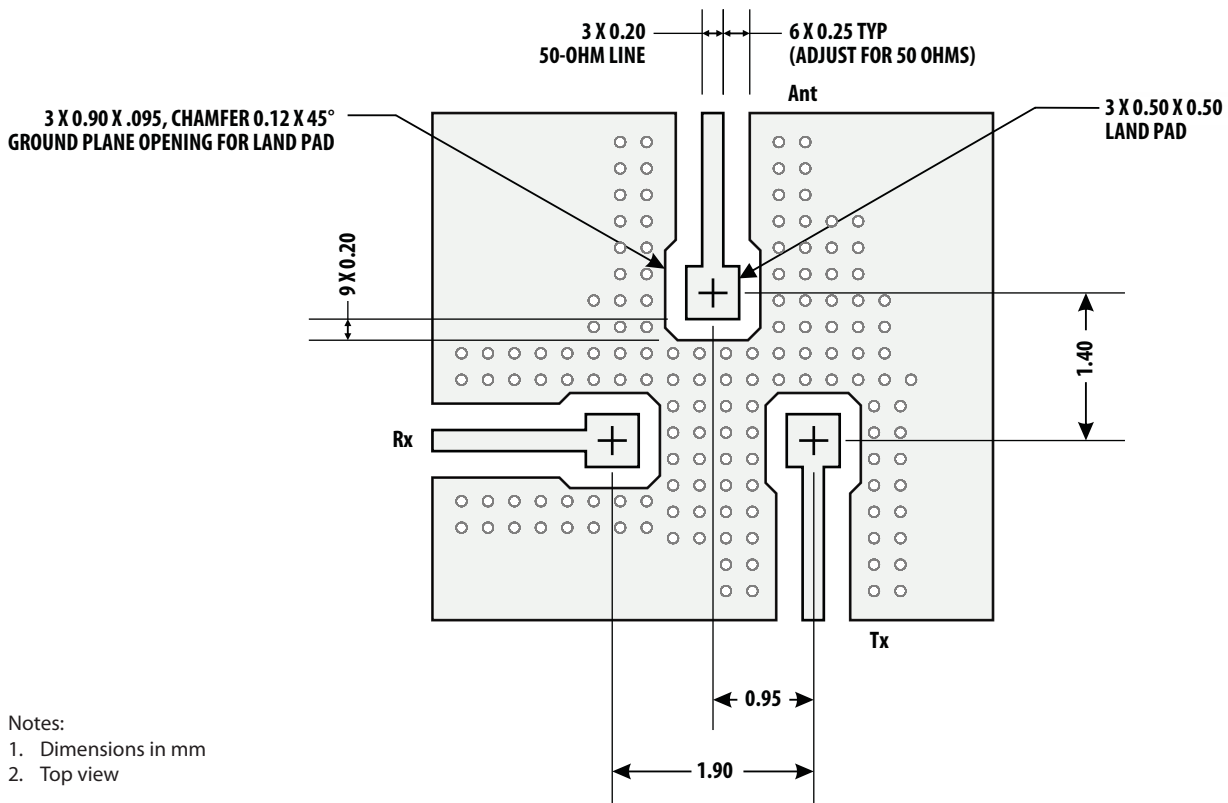


Figure 25. Suggested PCB Layout.

A PCB layout using the principles illustrated in the figure above is recommended to optimize performance of the ACMD-6007.


The transmission line dimensions shown are designed to achieve an impedance of 50 ohms for an $80\mu\text{m}$ thick PCB layer with a dielectric constant of 3.4. If other PCB materials or thicknesses are used, the 0.25 mm gap spacing may need to be adjusted to retain a Z_0 of 50 ohms.

It is important to maximize isolation between the Tx and Rx ports.

High isolation is achieved by: (1) maintaining a continuous ground plane around the I/O connections and duplexer mounting area, and (2) surrounding the I/O ports with sufficient ground vias to enclose the connections in a "Faraday cage."


The ground vias under the ACMD-6007 mounting area are also needed to provide adequate heat sinking for the device.

ACMD-6007

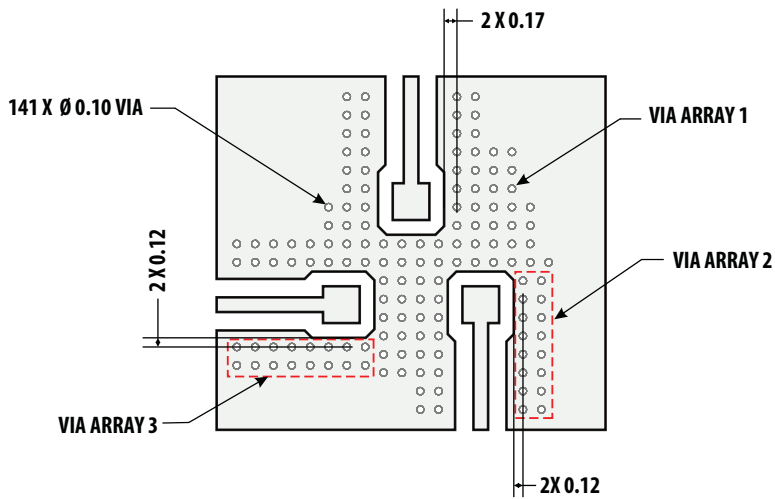


- Notes:
1. Dimensions in mm
 2. Top view
 3. Via arrays: horiz pitch = 0.25, vert pitch = 0.25

Figure 26. PCB Layout, Via Detail.

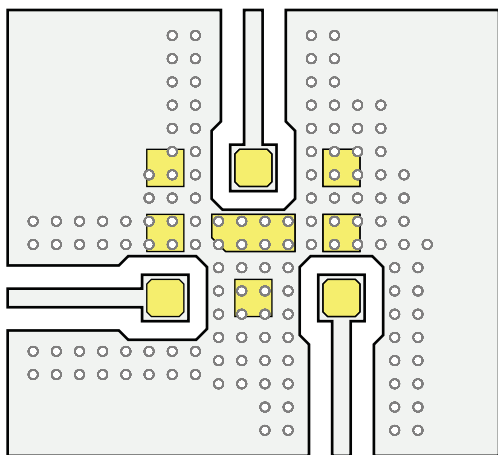


- Note:
1. Top view

Figure 27. ACMD-6007 Superposed on PCB Layout.

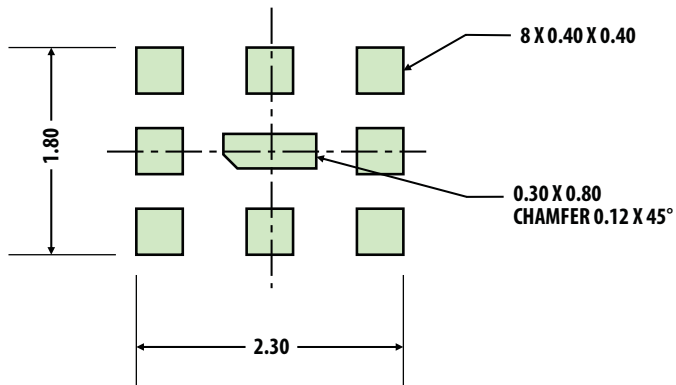

- Notes:
1. Dimensions in mm
 2. Top view
 3. Chamfer or radius all corners 0.05 mm min


Figure 28. Recommended Solder Stencil.



- Notes:
1. Top view
 2. Peripheral clearance of stencil aperture for center device pad is 0.05 mm. All other apertures match device pad 1:1


Figure 29. Solder Stencil Superposed on ACMD-6007.

ACMD-6007

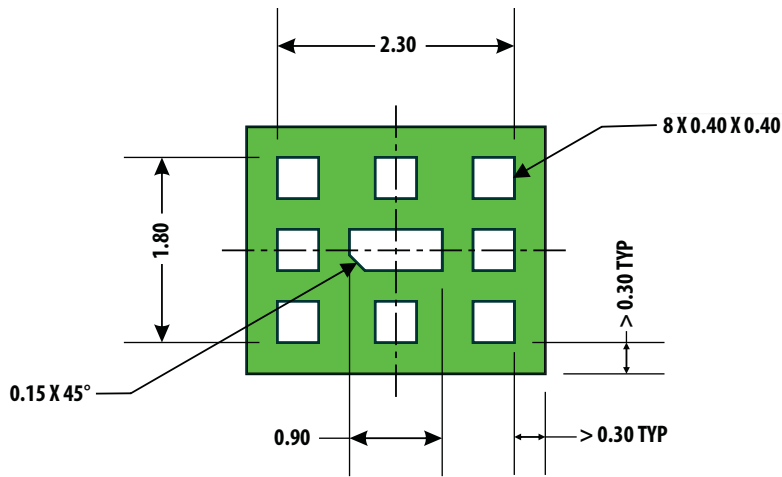


- Notes:
1. Dimensions in mm
 2. Top view

Figure 30. Recommended Solder Mask.



- Notes:
1. Top view
 2. Mask apertures match device pads 1:1

Figure 31. Solder Mask Superposed on ACMD-6007.

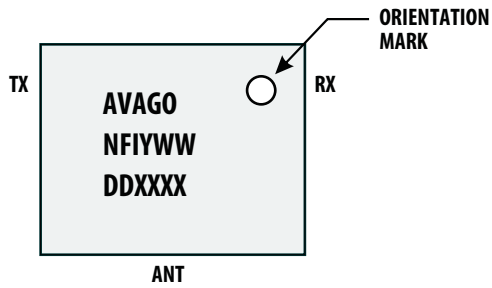

- AVAGO = Mfg (Avago Technologies, Inc.)
- N = ACMD-6007
- FI = Mfg Information
- Y = Year
- WW = Work Week
- DD = Date Code
- XXXX = Assembly Lot

Figure 32. Product Marking and Pin Orientation.

ACMD-6007

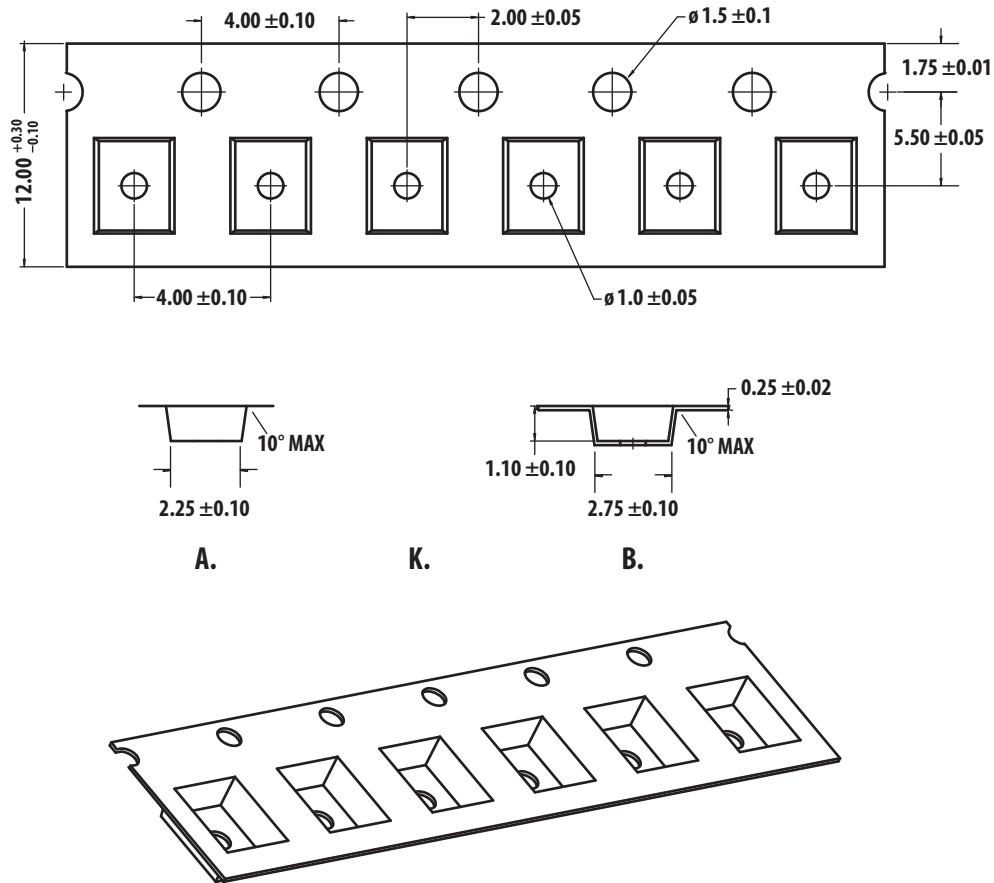


Figure 33. SMD Tape Packing.


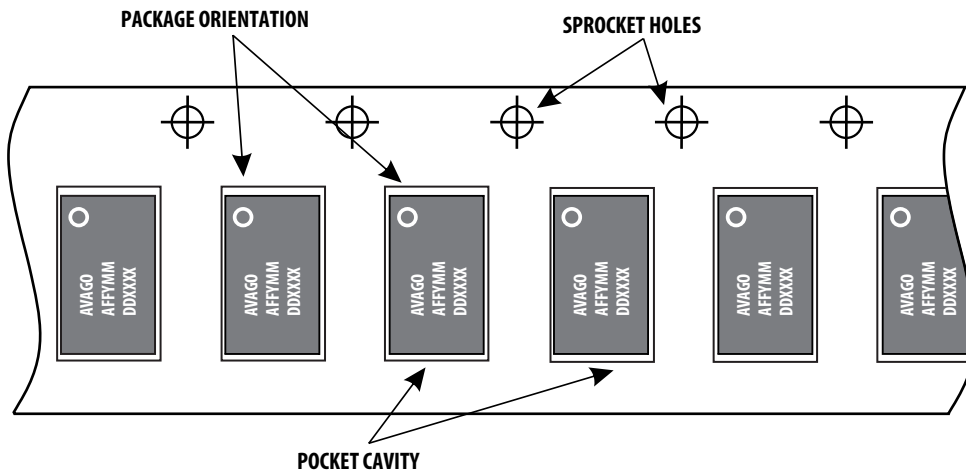


Figure 34. Unit Orientation in SMT Tape.

ACMD-6007

FRONT VIEW

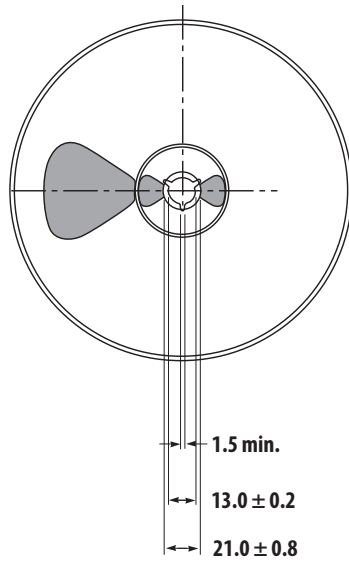

NOTES:

1. Reel shall be labeled with the following information (as a minimum).
 - a. manufacturers name or symbol
 - b. Avago Technologies part number
 - c. purchase order number
 - d. date code
 - e. quantity of units
2. A certificate of compliance (c of c) shall be issued and accompany each shipment of product.
3. Reel must not be made with or contain ozone depleting materials.
4. All dimensions in millimeters (mm)

BACK VIEW

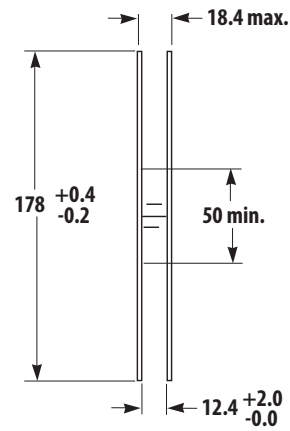
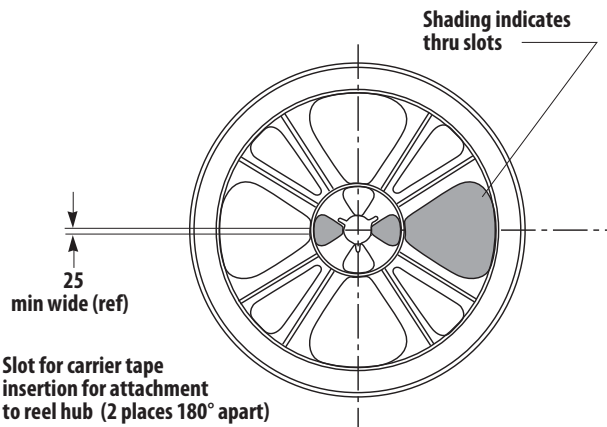


Figure 35. SMT Reel Drawing.

Package Moisture Sensitivity

Feature	Test Method	Performance
Moisture Sensitivity Level (MSL) at 260°C	JESD22-A113D	Level 3

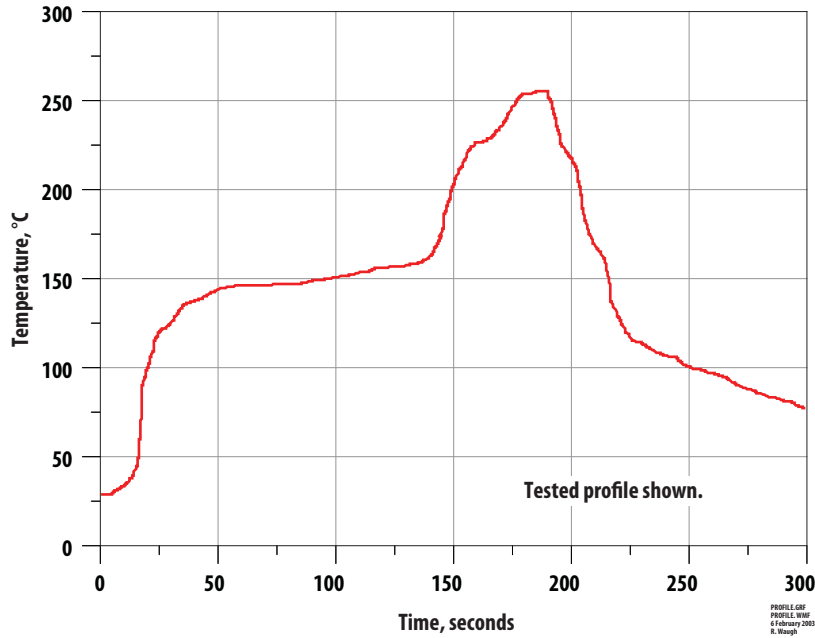


Figure 36. Verified SMT Solder Profile.

Ordering Information

Part Number	No. of Devices	Container
ACMD-6007-BLK	100	Anti-static Bag
ACMD-6007-TR1	3000	178 mm (7-inch Reel)

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2010 Avago Technologies. All rights reserved.
AV02-2568EN - July 5, 2010

AVAGO
TECHNOLOGIES