


### Features

- Epitaxial Construction
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- Surge Overload Rating to 150A Peak
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications
- Plastic Material: UL Flammability Classification Rating 94V-0

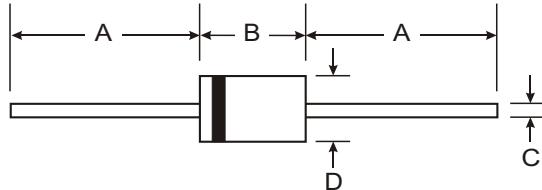

### Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 1.1 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

DO-201AD		
Dim	Min	Max
A	25.40	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30

All Dimensions in mm

### Maximum Ratings and Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

Characteristic	Symbol	SB520	SB530	SB540	SB550	SB560	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	20	30	40	50	60	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	35	42	V
Average Rectified Output Current (See Figure 1) (Note 1)	$I_O$			5.0			A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$			150			A
Forward Voltage (Note 2) @ $I_F = 5.0\text{A}$	$V_{FM}$		0.55		0.67		V
Peak Reverse Current @ $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage (Note 2)	$I_{RM}$		0.5				mA
@ $T_A = 100^\circ\text{C}$			50		25		
Typical Thermal Resistance Junction to Ambient (Note 1) (Note 3)	$R_{\theta JA}$ $R_{\theta JL}$		25				$^\circ\text{C}/\text{W}$
Operating Temperature Range	$T_j$	-65 to +125		-65 to +150			$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$		-65 to +150				

Notes:

1. Measured at ambient temperature at a distance of 9.5mm from case.
2. Short duration test pulse used to minimize self-heating effect.
3. Thermal resistance junction to lead vertical P.C.B. mounted, 0.375" (9.5mm) lead length.

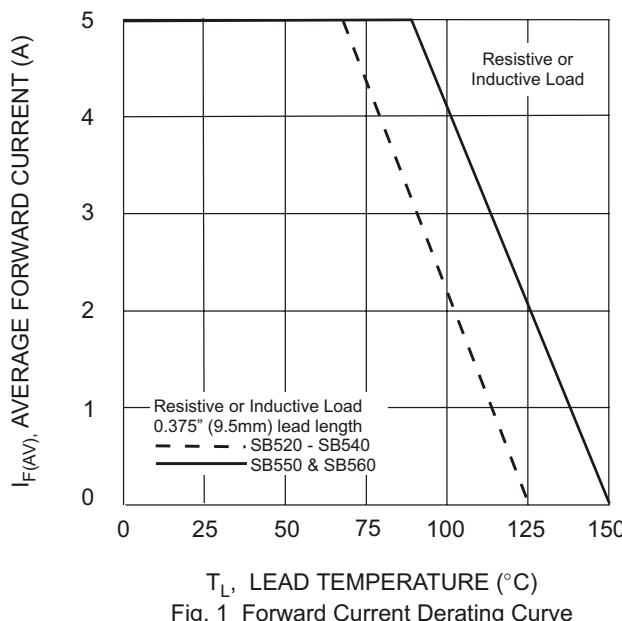


Fig. 1 Forward Current Derating Curve

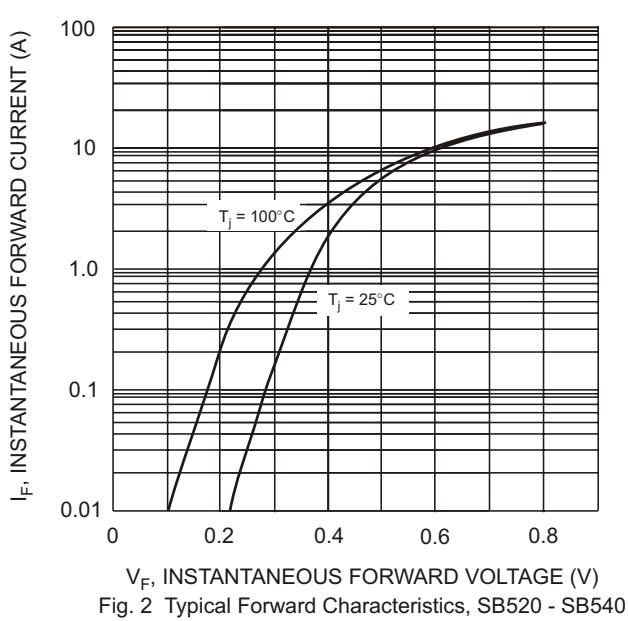


Fig. 2 Typical Forward Characteristics, SB520 - SB540

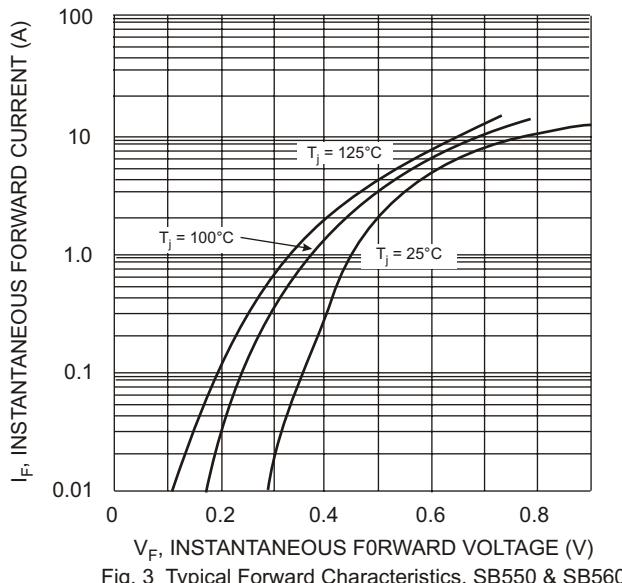


Fig. 3 Typical Forward Characteristics, SB550 & SB560

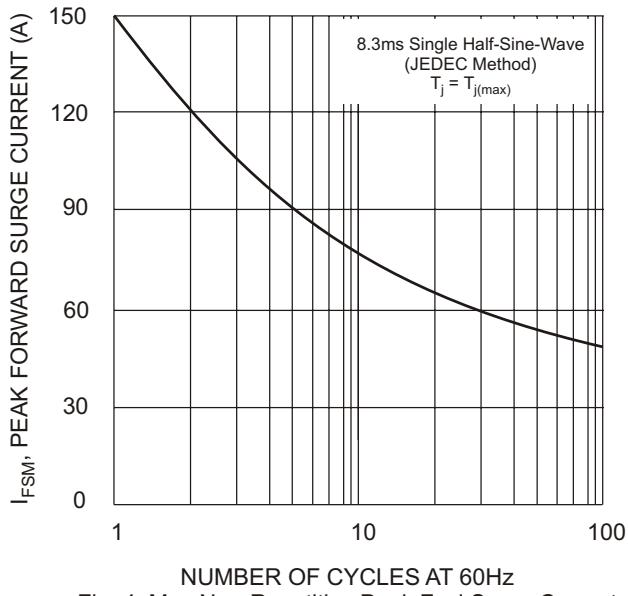


Fig. 4 Max Non-Repetitive Peak Fwd Surge Current

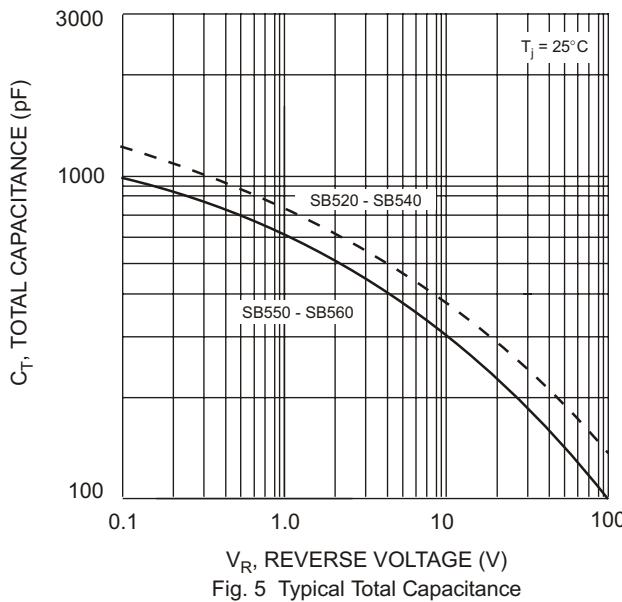


Fig. 5 Typical Total Capacitance


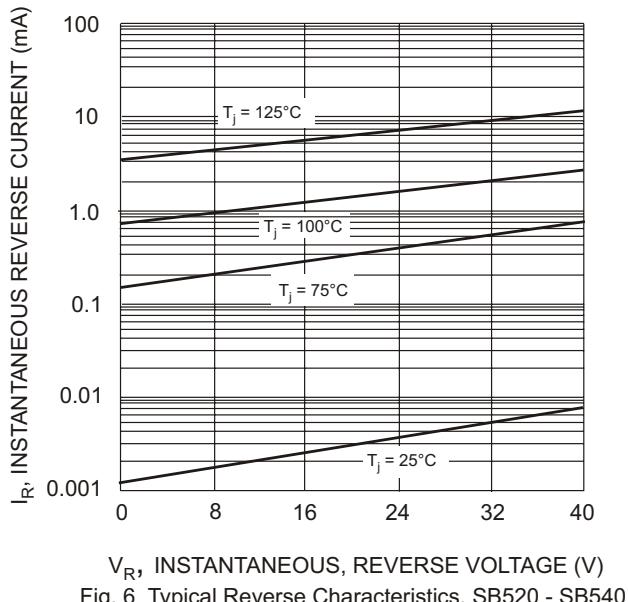


Fig. 6 Typical Reverse Characteristics, SB520 - SB540

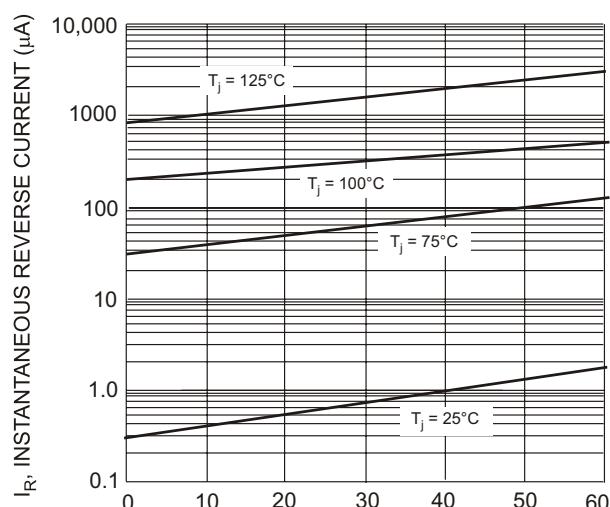

V<sub>R</sub>, INSTANTANEOUS REVERSE VOLTAGE (V)  
Fig. 7 Typical Reverse Characteristics, SB550 & SB560