


HIGH PASS FILTERS

Designer's Kit K2-HFCN+

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
 THE SOLUTION!

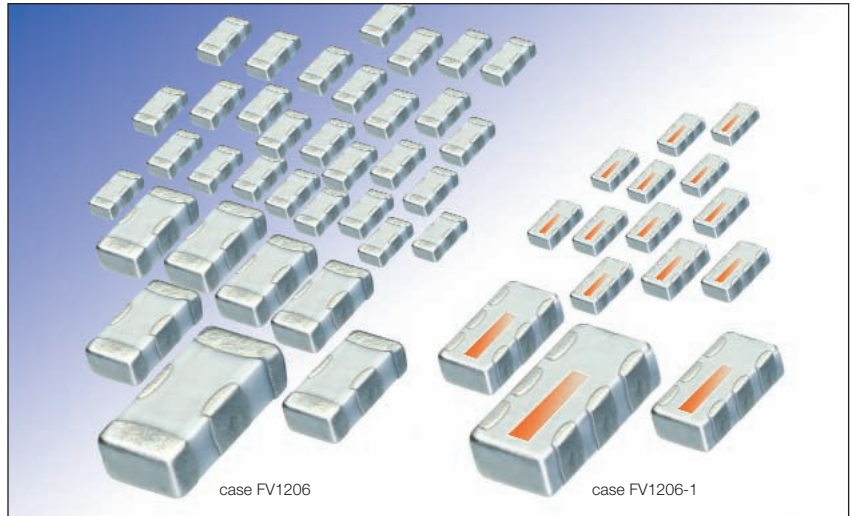

Passband 950 to 13000MHz

HFCN+ Features

- Wideband, 50Ω
- LTCC Low Temperature Co-fired Ceramic
- Small size (L)0.12" x (W)0.06"
- Temperature stable
- Repeatable performance
- Excellent power handling
- Hermetically sealed
- Low cost



All models are
RoHS compliant

\$99.95
 only *ea. kit (10 models, 5 of each, 50 total)*

Kit K2-HFCN+ Electrical specifications of each model

Model	Stopband (MHz) Min.		fco, (MHz) Nom.	Passband (MHz)		VSWR Typ.		Power Input* (W) Max.	No. of Sections	Case Style
	(loss > 40dB)	(loss > 20dB)	(loss 3dB) Typ.	(loss <1.3dB) Max.	(loss <2dB) Typ.	Stopband	Freq. (MHz) 1.5:1			
HFCN-880+	500	640	880	1060-2500	950-3200	20:1	970-2400	7	7	FV1206
HFCN-1300+	680	930	1300	1510-4000	1400-5000	20:1	1400-4000	7	7	FV1206
HFCN-1320+	910	1060	1320	1700-3800	1400-5000	20:1	1700-3700	7	7	FV1206
HFCN-1600+	1090	1290	1600	1950-4000	1650-5000	20:1	1700-4000	7	7	FV1206
HFCN-1810+	1100	1480	1810	2250-3850	1950-4750	20:1	2250-3750	7	7	FV1206
HFCN-1910+	1075	1400	1910	2200-4400	2000-5200	20:1	2100-4500	7	7	FV1206
HFCN-2100+	1050	1530	2100	2500-5000	2200-6000	20:1	2400-5200	7	7	FV1206
• HFCN-3800+	Loss 30dB Typ.		3800	Loss <1.5dB Max.	Loss <2dB Max.	20:1	3950-10000	7	5	FV1206-1
• HFCN-5500+	3100	3200	5500	4500-9000	4250-10000	20:1	5600-11000	7	5	FV1206-1
• HFCN-8400+	5700	6000	8400	Loss < 2.5dB Max.	Loss <3dB Max.	20:1	9000-13000	7	5	FV1206-1
				9500-13000	9000-13000					

• Patent Pending

* Passband rating, derate linearly to 3W at 100°C ambient



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

RF/IF MICROWAVE COMPONENTS

REV. OR
M104864
K2-HFCN+