

## KTA1273 TRANSISTOR (PNP)

### FEATURES

Power dissipation

$$P_{CM}: 1 \text{ W (Tamb=25}^\circ\text{C)}$$

Collector current


$$I_{CM}: -2 \text{ A}$$

Collector-base voltage

$$V_{(BR)CBO}: -30 \text{ V}$$

Operating and storage junction temperature range

$$T_J, T_{stg}: -55^\circ\text{C to } +150^\circ\text{C}$$

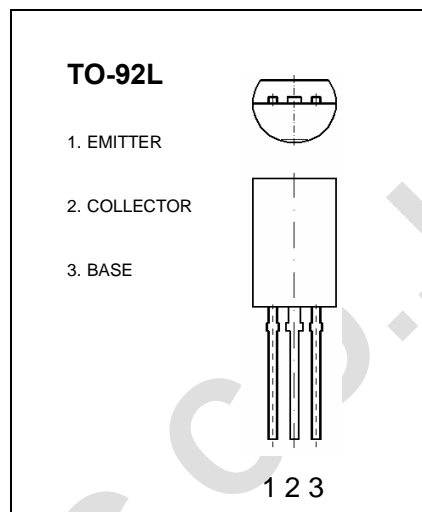

### ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -1\text{mA}, I_E = 0$	-30			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -10\text{mA}, I_B = 0$	-30			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -1\text{mA}, I_C = 0$	-5			V
Collector cut-off current	$I_{CBO}$	$V_{CB} = -30\text{V}, I_E = 0$			-0.1	$\mu\text{A}$
Emitter cut-off current	$I_{EBO}$	$V_{EB} = -5\text{V}, I_C = 0$			-0.1	$\mu\text{A}$
DC current gain	$h_{FE}$	$V_{CE} = -2\text{V}, I_C = -500\text{mA}$	100		320	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -1.5\text{A}, I_B = -30\text{mA}$			-2.0	V
Base-emitter voltage	$V_{BE}$	$V_{CE} = -2\text{V}, I_C = -500\text{mA}$			-1.0	V
Transition frequency	$f_T$	$V_{CE} = -2\text{V}, I_C = -500\text{mA}$		80		MHz
Collector output capacitance	$C_{ob}$	$V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz}$		48		pF

### CLASSIFICATION OF $h_{FE(1)}$

Rank	O	Y
Range	100-200	160-320