

## AIQ02R300-L

65 Watts

### Data Sheet

**Total Power:** 65 Watts  
(28 V @ 2.32 A)  
**Input Voltage:** 390 V  
**# of Outputs:** Single

### SPECIAL FEATURES

- 65 W Continuous power at 100°C baseplate temperature
- High efficiency: up to 90%
- Low output ripple and noise
- Positive Enable function
- Excellent transient response
- Safety isolated low voltage control and monitoring
- High reliability
- Wide input voltage range
- Adjustable output voltage
- Regulation to zero load
- EU Directive 2002/95/EC compliant for RoHS

### SAFETY

- UL cUL 60950 Recognized
- TUV EN60950 Licensed
- CE CE Mark



### Electrical Specifications

Input	
Input Range:	250 - 420 VDC
Input Surge:	500 V / 100 ms
Efficiency:	90% @ 28.0 V 65 W (typical)
Isolation Voltage:	2500 VDC
Output	
Line Regulation:	0.2 % typical
Load Regulation:	0.2 % typical
Noise / ripple:	3% Vo,
Transient response:	5% Vo deviation with 100% to 80% full load @ 0.1 A / $\mu$ S
Overvoltage protection:	30 - 31.5 V
Current limit:	130% Io maximum
Control	
Output Voltage Adjust:	90% - 105% (via external trim resistor)
Enable:	TTL compatible (positive enable logic)


### Environmental Specifications

Operating ambient temperature range:	-40 °C to +100 °C (baseplate temperature)
Storage temperature:	-55 °C to +125 °C (environment temperature)
Overtemperature protection:	120 °C max
Demonstrated MTTF (Telcordia SR-332)	4.15Mhrs

### Ordering Information

Input Voltage	Output Voltage	Efficiency	Model Number
390 V	28 V @ 2.32 A	89% typ	AIQ02R300-L

### Mechanical Drawings

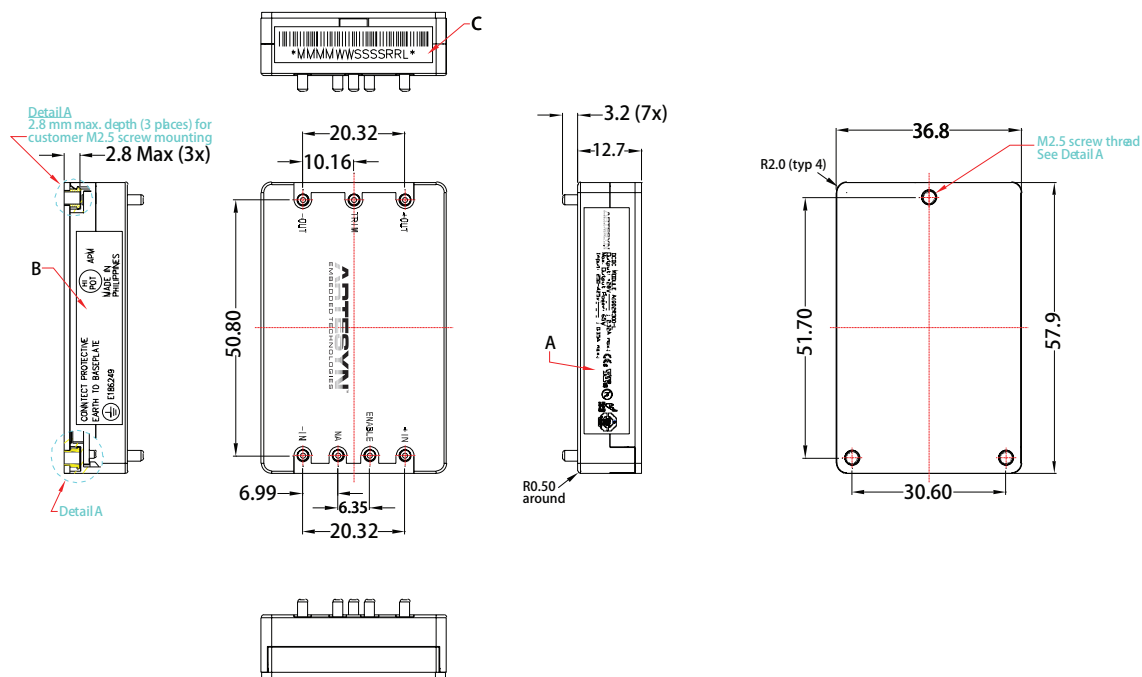

### Converter Pins

No.	Label
1	+In
2	Enable
3	NA
4	-In
5	-Out
6	Trim
7	+Out

### WORLDWIDE OFFICES

#### Americas

2900 S.Diablo Way  
 Tempe, AZ 85282  
 USA  
 +1 888 412 7832

#### Europe (UK)

Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX  
 United Kingdom  
 +44 (0) 1384 842 211

#### Asia (HK)

14/F, Lu Plaza  
 2 Wing Yip Street  
 Kwun Tong, Kowloon  
 Hong Kong  
 +852 2176 3333



[www.artesyn.com](http://www.artesyn.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2014 Artesyn Embedded Technologies, Inc.

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
 For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)