

3.3V, Hot Insertion, 16-Bit, 4-Port BusSwitch

Product Features

- Near-zero propagation delay
- 5Ω switches connect inputs to outputs when enabled
- Fast Switching Speed 4ns max.
- **Permits Hot Insertion**
- Pin compatible with 74 series 16244
- Operating Vcc: 3.0V to 3.6V
- Industrial operating temperature: -40°C to +85°C
- Packages available:
 - 48-pin 240 mil wide thin plastic TSSOP (A)
 - 48-pin 300 mil wide plastic SSOP (V)


Product Description

Pericom Semiconductor's PI3B series of logic circuits are produced using the Company's advanced 0.35 micron CMOS technology.

The PI3B16244 and PI3B162244 are 16-bit, 4-port bus switches that are pin compatible with the 74 series 16244 16-bit driver. Four enable signals (nBE) turn the switches on similar to the enable signals of the 16244. The bus switches create no additional propagation delay or ground bounce noise.

The PI3B162244 device has a built-in 25-ohm series resistor to reduce noise because of reflections, thus eliminating the need for an external terminating resistor.

Logic Block Diagram

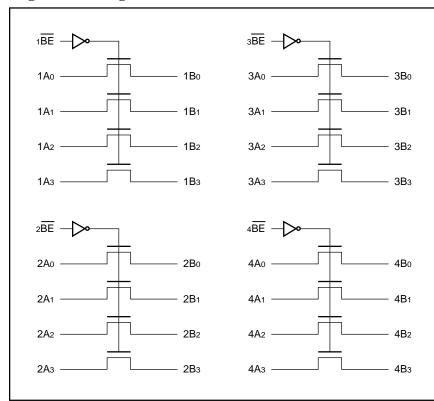

Truth Table(1)

Function	nBE	nA0-7
Disconnect	Н	Hi-Z
Connect	L	nB0-7

Note: 1. H = High Voltage Level L = Low Voltage Level Hi-Z = High Impedance

Product Pin Configuration

Froduct Fill Collinguration						
1BE [1	$\overline{}$	48 🛘 2BE				
1B0 2		47 D 1A0				
1B1 🛚 3		46 🛘 1A1				
GND 4		45 GND				
1B2 □ 5		44 🛘 1A2				
1B3 □ 6		43 🛘 1A3				
Vcc ☐ 7		42 🛘 Vcc				
2B0 □ 8		41 🛘 2A0				
2B1 □ 9		40 🗖 2A1				
GND ☐ 10	40 D'	39 🗖 GND				
2B2 □ 11	48-Pin A, V	38 🛘 2A2				
2B3 ☐ 12	7 1, •	37 🛘 2A3				
зВо 🛘 13		36 🛘 зАо				
3B1 □ 14		35 🛘 3A1				
GND ☐ 15		34 🗎 GND				
3B2 □ 16		33 🛘 3A2				
зВз 🗖 17		32 🛘 3A3				
Vcc □ 18		31 🕽 Vcc				
4B0 □ 19		30 🗖 4A0				
4B1 ☐ 20		29 🗖 4A1				
GND ☐ 21		28 GND				
4B2 ☐ 22		27 🛘 4A2				
4B3 ☐ 23		26 🛘 4A3				
4BE ☐ 24		25 3BE				

Product Pin Description

1

Pin Name	I/O	Description			
nBE	I	Bus Output Enable (Active LOW)			
nA0-nA7	I/O	Bus A			
nB0-nB7	I/O	Bus B			





Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature65°C to +150°C
Ambient Temperature with Power Applied40°C to +85°C
Supply Voltage Range0.5V to +4.6V
DC Input Voltage0.5V to +4.6V
DC Output Current
Power Dissipation

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

DC Electrical Characteristics (Over the Operating Range, $TA = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, $V_{CC} = 3.0\text{V}$ to 3.6V)

Parameters	Description	Test Conditions(1)	Min.	Typ. ⁽²⁾	Max.	Units	
VIH	Input HIGH Voltage	Guaranteed Logic HIGH Level		2.0			V
VIL	Input LOW Voltage	Guaranteed Logic LOW Level		-0.5		0.8	V
Іін	Input HIGH Current	Vcc = Max., Vin = Vcc				±1	μA
Inl	Input LOW Current	Vcc = Max., Vin = GND			±1	μA	
Іохн	High Impedance Output Current	$0 \le A, B \le V_{CC}$				±1	μA
Vik	Clamp Diode Voltage	$V_{CC} = Min., I_{IN} = -18mA$			-0.7	-1.2	V
Ron	Switch On Resistance ⁽³⁾	$V_{CC} = Min., V_{IN} = 0.0V,$	16244		5	8	Ω
		Ion = 48mA	162244	20	28	40	
		$V_{CC} = Min., V_{IN} = 2.4V,$	16244		10	15	Ω
		Ion = 15mA	162244	20	35	48	

Capacitance ($T_A = 25^{\circ}C$, f = 1 MHz)

Parameters(4)	Description	Test Conditions	Тур.	Units
Cin	Input Capacitance	$V_{IN} = 0V$	3.0	
Coff	A/B Capacitance, Switch Off	$V_{IN} = 0V$	8.5	pF
Con	A/B Capacitance, Switch On	$V_{IN} = 0V$	17.0	

Notes:

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- 2. Typical values are at Vcc = 3.3V, $TA = 25^{\circ}C$ ambient and maximum loading.
- 3. Measured by the voltage drop between A and B pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (A,B) pins.

2

4. This parameter is determined by device characterization but is not production tested.

PS8170B 11/06/98





Power Supply Characteristics

Parameters	Description	Test Conditions ⁽¹⁾			$Typ^{(2)}$	Max.	Units
Icc	Quiescent Power Supply Current	$V_{CC} = Max.$	$V_{IN} = GND$ or V_{CC}	_		10	μА
ΔΙςς	Supply Current per Input @ TTL HIGH	Vcc = Max.	$V_{IN} = 3.0V^{(3)}$	_		750	μА
Іссь	Supply Current per Input per MHz ⁽⁴⁾	Vcc = Max., A and B Pins Open Control Input Toggling 50% Duty Cycle		_	_	0.25	mA/ MHz

Notes:

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
- 2. Typical values are at Vcc = 3.3V, $+25^{\circ}C$ ambient.
- 3. Per TTL driven input (control inputs only); A and B pins do not contribute to Icc.
- 4. This current applies to the control inputs only and represent the current required to switch internal capacitance at the specified frequency. The A and B inputs generate no significant AC or DC currents as they transition. This parameter is not tested, but is guaranteed by design.

PI3B16244 Switching Characteristics over Operating Range

				Com.		
Parameters	Description	$\textbf{Conditions}^{(1)}$		Min.	Max.	Units
tplh	Propagation Delay ^(2,3)	CL = 50pF	16244		0.25	
tPHL	Ax to Bx, Bx to Ax	$R_L = 500\Omega$	162244		1.25	
tpzh	Bus Enable Time	CL = 50pF		1	4.5	ns
tpzl	BE to Ax or Bx	$RL = 500\Omega$,				
tphz	Bus Disable Time	$R = 500\Omega$		1	5.0	
tPLZ	BE to Ax or Bx					

Notes:

- 1. See test circuit and waveforms.
- 2. This parameter is guaranteed but not tested on Propagation Delays.
- 3. The bus switch contributes no propagational delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25ns for 50pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

2380 Bering Drive • San Jose, CA 95131 • 1-800-435-2336 • Fax (408) 435-1100 • http://www.pericom.com

PS8170B 11/06/98