

Thick Film Chip Resistors / Low Resistance Type

Type: **ERJ 2LW, 3LW, 6LW**
2BW, 3BW, 6BW,
8BW, 6CW, 8CW
ERJ 2B, 3B, 6D, 6B, 8B,
14B, 3R, 6R, 8R, 14R,
12R, 12Z, 1TR
ERJ L03, L06, L08, L14,
L12, L1D, L1W



Features

- Current Sensing resistor
- Small size and lightweight
- Realize both low-resistance & High-precision by original thick film resistive element & special electrode structure
- Suitable for both reflow and flow soldering
- Realize High-power by double-sided resistive elements structure that aimed to suppress temperature rising : ERJ2LW, 3LW, 6LW, 2BW, 3BW, 6BW, 8BW, 6CW, 8CW
- Low TCR : $\pm 75 \times 10^{-6}/^{\circ}\text{C}$ (ERJ6CW, 8CW)
- Low Resistance Value : Thick film resistors available from 5m Ω (ERJ3LW, 6LW)
- Reference Standards : IEC 60115-8, JIS C 5201-8, JEITA RC-2144
- AEC-Q200 qualified
- RoHS compliant

■ **As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,**
 Please see Data Files

Explanation of Part Numbers

- ERJ2LW, 3LW, 6LW, 2BW, 3BW, 6BW, 8BW, 6CW, 8CW
 <High power (double-sided resistive elements structure) type>

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| E | R | J | 2 | B | W | G | R | 0 | 4 | 7 | X |

| Product Code | Code | Inch | Power Rating | Resistance Value | Resistance Tolerance | | Resistance Value | Packaging Methods | | | |
|---------------------------|------|------|------------------------------|-------------------------------|---|---------------|--|-------------------|---|----------|--|
| | | | | | Code | Tolerance | | Code | Packaging | Part No. | |
| Thick Film Chip Resistors | 2LW | 0402 | 0.2 W | 10m Ω | D | $\pm 0.5\%$ * | Shown by 4 digits or letters. (Ex.) R047 : 0.047 Ω =47m Ω | X | Pressed Carrier Taping 2 mm pitch, 10,000 pcs. | ERJ2LW | |
| | 3LW | 0603 | 0.25 W | 5m Ω , 10m Ω | F | $\pm 1\%$ | | | | ERJ2BW | |
| | 6LW | 0805 | 0.5 W | 5, 6, 7, 8, 9m Ω | G | $\pm 2\%$ | | V | Punched Carrier Taping 4 mm pitch, 5,000 pcs. | ERJ3LW | |
| | 2BW | 0402 | 0.25 W | 47m Ω to 100m Ω | J | $\pm 5\%$ | | | | ERJ6LW | |
| | 3BW | 0603 | 0.33 W | 20m Ω to 100m Ω | * Please refer to the rating table for the resistance tolerance | | | | | ERJ3BW | |
| | 6BW | 0805 | 0.5 W | 10m Ω to 100m Ω | | | | | | ERJ6BW | |
| | 8BW | 1206 | 1 W | 10m Ω to 100m Ω | | | | | | ERJ8BW | |
| | 6CW | 0805 | 0.5 W | 10m Ω to 30m Ω | | | | | | ERJ6CW | |
| 8CW | 1206 | 1 W | 10m Ω to 50m Ω | ERJ8CW | | | | | | | |

- ERJ2BS/2BQ, 3BS/3BQ, 6BS/6BQ, 8BS/8BQ, 14BS/14BQ, 6D, 3R, 6R, 8R, 14R, 12R, 12Z, 1TR
<High power type/Standard type>

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
| E | R | J | 8 | R | Q | F | R | 2 | 2 | V |

| Product Code | Size, Power Rating | | | Resistance Value | | Resistance Tolerance | | Packaging Methods | | |
|---------------------------|--------------------|------|----------|------------------------|------------------|---|-----------|-------------------|---|-------------------------------------|
| Thick Film Chip Resistors | Type | Inch | Power R. | Code | Res. Value | Code | Tolerance | Code | Packaging | Part No. |
| | 2B | 0402 | 0.166 W | S | 0.1 Ω to 0.2 Ω | D | ± 0.5 %* | X | Punched Carrier Taping 2 mm pitch, 10,000 pcs. | ERJ2B |
| | 3B | 0603 | 0.25 W | Q | 0.22 Ω to 9.1 Ω* | F | ± 1 % | V | Punched Carrier Taping 4 mm pitch, 5,000 pcs. | ERJ3B/3R ERJ6D/6B/6R ERJ8B/8R |
| | 3R | 0603 | 0.1 W | * 2B : 0.22 Ω to 1.0 Ω | | G | ± 2 % | U | Embossed Carrier Taping 4 mm pitch, 5,000 pcs. | ERJ14B/14R ERJ12R ERJ12Z |
| | 6D | 0805 | 0.5 W | | | J | ± 5 % | | | |
| | 6B | 0805 | 0.33 W | | | * Please refer to the rating table for the resistance tolerance | | | | |
| | 6R | 0805 | 0.125 W | | | | | | | |
| | 8B | 1206 | 0.5 W | | | | | | | |
| | 8R | 1206 | 0.25 W | | | | | | | |
| | 14B | 1210 | 0.5 W | | | | | | | |
| | 14R | 1210 | 0.25 W | | | | | | | |
| | 12R | 1812 | 0.5 W | | | | | | | |
| | 12Z | 2010 | 0.5 W | | | | | | | |
| | 1TR | 2512 | 1 W | | | | | | | |

| Resistance Value | |
|---|--|
| Shown by 3 digits or letters. Only when it is D (E24, E96) or F (E96), shown by 4 digits or letters. (Ex.) R22 : 0.22 Ω R102 : 0.102 Ω | |

- ERJL03, L06, L08, L14, L12, L1D, L1W <Low TCR type>

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| E | R | J | L | 1 | 4 | K | J | 5 | 0 | M | U |

| Product Code | Size, Power Rating | | | Code | Res. Value | Resistance Tolerance | | Packaging Methods | | |
|---------------------------|--------------------|------|----------|---|--|----------------------|-----------|---|--|----------------------------|
| Thick Film Chip Resistors | Type | Inch | Power R. | K | Std. | Code | Tolerance | Code | Packaging | Part No. |
| | L03 | 0603 | 0.2 W | | 20m Ω, 22m Ω, 33m Ω, 39m Ω, 47m Ω, 50m Ω, 100m Ω | F | ± 1 % | V | Punched Carrier Taping 4 mm pitch, 5,000 pcs. | ERJL03 ERJL06 ERJL08 |
| | L06 | 0805 | 0.25 W | * L03, L06, L08 : 47m Ω to 100m Ω L1D, L1W : 40m Ω to 100m Ω | U | ± 5 % | U | Embossed Carrier Taping 4 mm pitch, 5,000 pcs. | ERJL14 ERJL12 ERJL1D | |
| | L08 | 1206 | 0.33 W | | 20m Ω to 100m Ω* | | | | | |
| | L14 | 1210 | 0.33 W | | | | | | | |
| | L12 | 1812 | 0.5 W | | | | | | | |
| | L1D | 2010 | 0.5 W | | | | | | | |
| | L1W | 2512 | 1 W | | | | | | | |

| Resistance Value | |
|---|--|
| Shown by 3 digits or letters. (Ex.) 50M:50m Ω, 10 C:100m Ω | |

Ratings

<High power (double-sided resistive elements structure) type>

| Part No. (inch size) | Power Rating ⁽²⁾ at 70 °C (W) | Resistance Tolerance (%) | Resistance ⁽¹⁾ Range (Ω) | T.C.R. (× 10 ⁻⁶ /°C) | Category Temperature Range (°C) | AEC-Q200 Grade |
|-------------------------|--|--------------------------------|---|---|---------------------------------------|-------------------|
| ERJ2LW (0402) | 0.2 | ±1, ±2, ±5 | 10m | 0 to 500 | -55 to +125 | Grade 1 |
| ERJ3LW (0603) | 0.25 | ±1, ±2, ±5 | 5m | 0 to 700 | -55 to +125 | Grade 1 |
| | | | 10m | 0 to 300 | -55 to +125 | |
| ERJ6LW (0805) | 0.5 | ±1, ±2, ±5 | 5, 6, 7, 8, 9m | 0 to 300 | -55 to +125 | Grade 1 |
| ERJ2BW (0402) | 0.25 | ±1, ±2, ±5 | 47m to 100m (E24) | ±300 | -55 to +155 | Grade 0 |
| ERJ3BW (0603) | 0.33 | ±1, ±2, ±5 | 20m to 100m (E24) | 20m Ω ≤ R < 39m Ω : ±250 39m Ω ≤ R ≤ 100m Ω : ±150 | -55 to +155 | Grade 0 |
| ERJ6BW (0805) | 0.5 | ±1, ±2, ±5 | 10m to 100m (E24) | 10m Ω ≤ R < 15m Ω : ±300 15m Ω ≤ R ≤ 100m Ω : ±200 | -55 to +155 | Grade 0 |
| ERJ8BW (1206) | 1 | ±1, ±2, ±5 | 10m to 100m (E24) | 10m Ω ≤ R < 20m Ω : ±200 20m Ω ≤ R < 47m Ω : ±150 47m Ω ≤ R ≤ 100m Ω : ±100 | -55 to +155 | Grade 0 |
| ERJ6CW (0805) | 0.5 | ±0.5, ±1, ±2, ±5 | 10m to 30m (E24) | ±75 | -55 to +125 | Grade 1 |
| ERJ8CW (1206) | 1 | ±1, ±2, ±5 | 10m to 50m (E24) | ±75 | -55 to +125 | Grade 1 |

(1) Please contact us when resistors of irregular series are needed.

(2) Use it on the condition that the case temperature is below the upper category temperature.

- Rated Continuous Working Voltage (RCWV) shall be determined from RCWV = √ Power Rating × Resistance Values.
- Overload Test Voltage (OTV) shall be determined from OTV = Specified Magnification (refer to performance) × RCWV.

Ratings

<High power type>

| Part No. (inch size) | Power Rating ⁽²⁾ at 70 °C (W) | Resistance ⁽³⁾ Tolerance (%) | Resistance ⁽¹⁾ Range (Ω) | T.C.R. (× 10 ⁻⁶ /°C) | Category Temperature Range (°C) | AEC-Q200 Grade |
|-------------------------|--|---|---|------------------------------------|---------------------------------------|-------------------|
| ERJ2BS (0402) | 0.166 | ±1, ±2, ±5 | 0.10 to 0.20 (E24) | ±300 | -55 to +155 | Grade 0 |
| ERJ2BQ (0402) | | | 0.22 to 1.0 (E24) | ±250 | | |
| ERJ3BS (0603) | 0.25 | ±1, ±2, ±5 | 0.10 to 0.20 (E24) | ±300 | -55 to +155 | Grade 0 |
| ERJ3BQ (0603) | | | 0.22 to 0.91 (E24) | | | |
| | | | 1.0 to 9.1 (E24) | ±200 | | |
| ERJ6DS (0805) | 0.5 | ±0.5, ±1, ±2, ±5 | 0.10 to 0.20 (E24, E96) | ±150 | -55 to +155 | Grade 0 |
| ERJ6DQ (0805) | | | 0.22 to 9.1 (E24, E96) | ±100 | | |
| ERJ6BS (0805) | 0.33 | ±1, ±2, ±5 | 0.10 to 0.20 (E24) | ±250 | -55 to +155 | Grade 0 |
| ERJ6BQ (0805) | | | 0.22 to 0.91 (E24) | | | |
| | | | 1.0 to 9.1 (E24) | ±200 | | |
| ERJ8BS (1206) | 0.5 | ±1, ±2, ±5 | 0.10 to 0.20 (E24) | ±250 | -55 to +155 | Grade 0 |
| ERJ8BQ (1206) | | | 0.22 to 0.91 (E24) | | | |
| | | | 1.0 to 9.1 (E24) | ±200 | | |
| ERJ14BS (1210) | 0.5 | ±1, ±2, ±5 | 0.10 to 0.20 (E24) | ±200 | -55 to +155 | Grade 0 |
| ERJ14BQ (1210) | | | 0.22 to 0.91 (E24) | | | |
| | | | 1.0 to 9.1 (E24) | ±100 | | |

(1) Please contact us when resistors of irregular series are needed.

(2) Use it on the condition that the case temperature is below the upper category temperature.

(3) E96 series also have ±0.5 %, ±1 % line-up.

· Rated Continuous Working Voltage (RCWV) shall be determined from $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$.

· Overload Test Voltage (OTV) shall be determined from $OTV = \text{Specified Magnification (refer to performance)} \times RCWV$.

<Standard type>

| Part No. (inch size) | Power Rating ⁽²⁾ at 70 °C (W) | Resistance ⁽³⁾ Tolerance (%) | Resistance ⁽¹⁾ Range (Ω) | T.C.R. (× 10 ⁻⁶ /°C) | Category Temperature Range (°C) | AEC-Q200 Grade |
|-------------------------|--|---|---|------------------------------------|---------------------------------------|-------------------|
| ERJ3RS (0603) | 0.1 | ±1, ±2, ±5 | 0.10 to 0.20 (E24) | ±300 | -55 to +155 | Grade 0 |
| ERJ3RQ (0603) | | | 0.22 to 0.91 (E24) | | | |
| | | | 1.0 to 9.1 (E24) | ±200 | | |
| ERJ6RS (0805) | 0.125 | ±1, ±2, ±5 | 0.10 to 0.20 (E24) | ±250 | -55 to +155 | Grade 0 |
| ERJ6RQ (0805) | | | 0.22 to 0.91 (E24) | | | |
| | | | 1.0 to 9.1 (E24) | ±200 | | |
| ERJ8RS (1206) | 0.25 | ±1, ±2, ±5 | 0.10 to 0.20 (E24) | ±250 | -55 to +155 | Grade 0 |
| ERJ8RQ (1206) | | | 0.22 to 0.91 (E24) | | | |
| | | | 1.0 to 9.1 (E24) | ±200 | | |
| ERJ14RS (1210) | 0.25 | ±1, ±2, ±5 | 0.10 to 0.20 (E24) | ±200 | -55 to +155 | Grade 0 |
| ERJ14RQ (1210) | | | 0.22 to 0.91 (E24) | | | |
| | | | 1.0 to 9.1 (E24) | ±100 | | |
| ERJ12RS (1812) | 0.5 | ±1, ±2, ±5 | 0.10 to 0.20 (E24) | ±200 | -55 to +155 | Grade 0 |
| ERJ12RQ (1812) | | | 0.22 to 0.91 (E24) | | | |
| | | | 1.0 to 9.1 (E24) | ±100 | | |
| ERJ12ZS (2010) | 0.5 | ±1, ±2, ±5 | 0.10 to 0.20 (E24) | ±200 | -55 to +155 | Grade 0 |
| ERJ12ZQ (2010) | | | 0.22 to 0.91 (E24) | | | |
| | | | 1.0 to 9.1 (E24) | ±100 | | |
| ERJ1TRS (2512) | 1 | ±1, ±2, ±5 | 0.10 to 0.20 (E24) | ±200 | -55 to +155 | Grade 0 |
| ERJ1TRQ (2512) | | | 0.22 to 0.91 (E24) | | | |
| | | | 1.0 to 9.1 (E24) | ±100 | | |

(1) Please contact us when resistors of irregular series are needed.

(2) Use it on the condition that the case temperature is below the upper category temperature.

· Rated Continuous Working Voltage (RCWV) shall be determined from $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$.

· Overload Test Voltage (OTV) shall be determined from $OTV = \text{Specified Magnification (refer to performance)} \times RCWV$.

<Low TCR type>


| Part No. (inch size) | Power Rating ⁽²⁾ at 70 °C (W) | Resistance Tolerance (%) | Resistance ⁽¹⁾ Range (Ω) | T.C.R. ($\times 10^{-6}/^{\circ}\text{C}$) | Category Temperature Range (°C) | AEC-Q200 Grade |
|-------------------------|--|--------------------------------|---|---|---------------------------------------|-------------------|
| ERJL03 (0603) | 0.2 | $\pm 1, \pm 5$ | 47m to 100m | ± 200 | -55 to +125 | Grade 1 |
| ERJL06 (0805) | 0.25 | $\pm 1, \pm 5$ | 47m to 100m | ± 100 | -55 to +125 | Grade 1 |
| ERJL08 (1206) | 0.33 | $\pm 1, \pm 5$ | 47m to 100m | ± 100 | -55 to +125 | Grade 1 |
| ERJL14 (1210) | 0.33 | $\pm 1, \pm 5$ | 20m to 100m | R < 47m Ω : ± 300 R ≥ 47m Ω : ± 100 | -55 to +125 | Grade 1 |
| ERJL12 (1812) | 0.5 | $\pm 1, \pm 5$ | 20m to 100m | | -55 to +125 | Grade 1 |
| ERJL1D (2010) | 0.5 | $\pm 1, \pm 5$ | 40m to 100m | | -55 to +125 | Grade 1 |
| ERJL1W (2512) | 1 | $\pm 1, \pm 5$ | 40m to 100m | | -55 to +125 | Grade 1 |

(1) Standard R.V. : 20m Ω, 22m Ω, 33m Ω, 39m Ω, 47m Ω, 50m Ω, 100m Ω, Custom R.V. : Each 1m Ω within upper range.

(2) Use it on the condition that the case temperature is below the upper category temperature.


- Rated Continuous Working Voltage (RCWV) shall be determined from $\text{RCWV} = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$.
- Overload Test Voltage (OTV) shall be determined from $\text{OTV} = \text{Specified Magnification (refer to performance)} \times \text{RCWV}$.

Construction

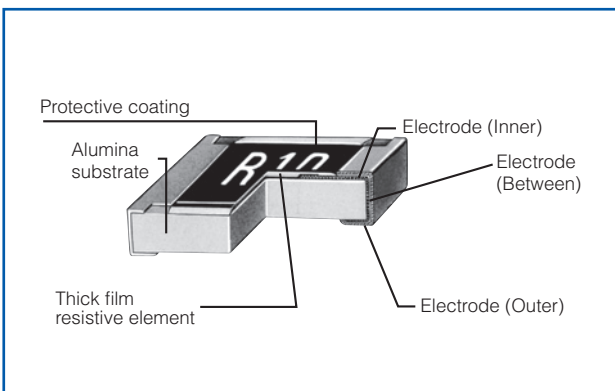


Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure below.

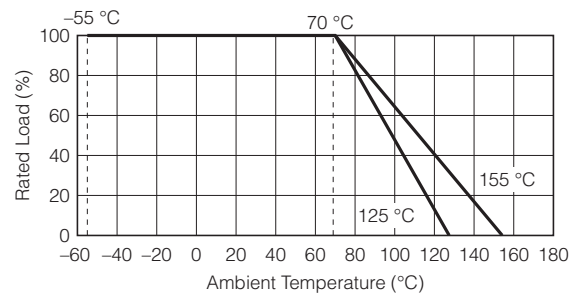

Dimensions in mm (not to scale)

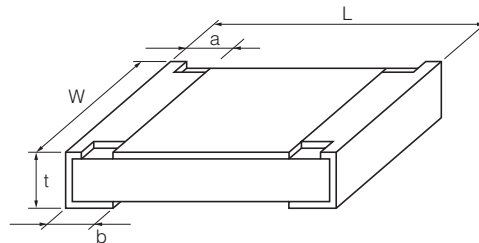

| Part No. | Dimensions (mm) | | | | | Mass(Weight) [g/1000 pcs.] |
|----------------------|-------------------------|-------------------------|-----------------|-----------------|-----------------|-------------------------------|
| | L | W | a | b | t | |
| ERJ2LW | 1.00 $^{+0.10}_{-0.05}$ | 0.50 $^{+0.10}_{-0.05}$ | 0.25 $^{+0.10}$ | 0.25 $^{+0.10}$ | 0.40 $^{+0.05}$ | 0.8 |
| ERJ2BW | 1.00 $^{+0.10}$ | 0.50 $^{+0.10}_{-0.05}$ | 0.24 $^{+0.10}$ | 0.24 $^{+0.10}$ | 0.35 $^{+0.05}$ | 0.8 |
| ERJ2BS | 1.00 $^{+0.10}$ | 0.50 $^{+0.10}_{-0.05}$ | 0.20 $^{+0.10}$ | 0.27 $^{+0.10}$ | 0.35 $^{+0.05}$ | 0.8 |
| ERJ2BQ | | | 0.20 $^{+0.10}$ | 0.27 $^{+0.10}$ | 0.35 $^{+0.05}$ | |
| ERJ3LW (5m Ω) | 1.60 $^{+0.15}$ | 0.80 $^{+0.15}$ | 0.50 $^{+0.20}$ | 0.50 $^{+0.20}$ | 0.55 $^{+0.10}$ | 3 |
| ERJ3LW (10m Ω) | 1.60 $^{+0.15}$ | 0.80 $^{+0.15}$ | 0.40 $^{+0.20}$ | 0.40 $^{+0.20}$ | 0.55 $^{+0.10}$ | 3 |
| ERJ3BW | | | 0.40 $^{+0.20}$ | 0.40 $^{+0.20}$ | 0.55 $^{+0.10}$ | |
| ERJ3R | 1.60 $^{+0.15}$ | 0.80 $^{+0.15}$ | 0.30 $^{+0.20}$ | 0.30 $^{+0.15}$ | 0.45 $^{+0.10}$ | 2 |
| ERJ3B | | | | | 0.45 $^{+0.10}$ | |
| ERJL03 | | | | | 0.45 $^{+0.10}$ | |
| ERJ6LW | 2.00 $^{+0.20}$ | 1.25 $^{+0.20}$ | 0.63 $^{+0.20}$ | 0.63 $^{+0.20}$ | 0.70 $^{+0.10}$ | 6 |
| ERJ6BW | 2.00 $^{+0.20}$ | 1.25 $^{+0.20}$ | 0.55 $^{+0.20}$ | 0.55 $^{+0.20}$ | 0.65 $^{+0.10}$ | 6 |
| ERJ6CW (10 to 13m Ω) | | | 0.60 $^{+0.20}$ | 0.60 $^{+0.20}$ | 0.65 $^{+0.10}$ | |
| ERJ6CW (15 to 30m Ω) | | | 0.45 $^{+0.20}$ | 0.45 $^{+0.20}$ | 0.65 $^{+0.10}$ | |
| ERJ6D | 2.00 $^{+0.20}$ | 1.25 $^{+0.10}$ | 0.40 $^{+0.20}$ | 0.55 $^{+0.25}$ | 0.60 $^{+0.10}$ | 5 |
| ERJ6R | 2.00 $^{+0.20}$ | 1.25 $^{+0.10}$ | 0.40 $^{+0.20}$ | 0.40 $^{+0.20}$ | 0.60 $^{+0.10}$ | 5 |
| ERJ6B | | | | | 0.60 $^{+0.10}$ | |
| ERJL06 | | | | | 0.60 $^{+0.10}$ | |

| Part No. | Dimensions (mm) | | | | | Mass(Weight) [g/1000 pcs.] |
|----------------------|-------------------------|-------------------------|-----------------|-----------------|-----------------|-------------------------------|
| | L | W | a | b | t | |
| ERJ8BW | 3.20 $^{+0.20}$ | 1.60 $^{+0.20}$ | 1.00 $^{+0.20}$ | 1.00 $^{+0.20}$ | 0.65 $^{+0.10}$ | 13 |
| ERJ8CW (10 to 16m Ω) | 3.20 $^{+0.20}$ | 1.60 $^{+0.20}$ | 1.10 $^{+0.20}$ | 1.10 $^{+0.20}$ | 0.65 $^{+0.10}$ | 13 |
| ERJ8CW (18 to 50m Ω) | | | 0.60 $^{+0.20}$ | 0.60 $^{+0.20}$ | 0.65 $^{+0.10}$ | |
| ERJ8R | 3.20 $^{+0.05}_{-0.20}$ | 1.60 $^{+0.05}_{-0.15}$ | 0.50 $^{+0.20}$ | 0.50 $^{+0.20}$ | 0.60 $^{+0.10}$ | 10 |
| ERJ8B | | | | | 0.60 $^{+0.10}$ | |
| ERJL08 | | | | | 0.60 $^{+0.10}$ | |
| ERJ14R | 3.20 $^{+0.20}$ | 2.50 $^{+0.20}$ | 0.50 $^{+0.20}$ | 0.50 $^{+0.20}$ | 0.60 $^{+0.10}$ | 16 |
| ERJ14B | | | | | 0.60 $^{+0.10}$ | |
| ERJL14 | 4.50 $^{+0.20}$ | 3.20 $^{+0.20}$ | 0.50 $^{+0.20}$ | 0.50 $^{+0.20}$ | 0.60 $^{+0.10}$ | 27 |
| ERJ12R | | | | | 0.60 $^{+0.10}$ | |
| ERJL12 | 5.00 $^{+0.20}$ | 2.50 $^{+0.20}$ | 0.60 $^{+0.20}$ | 0.60 $^{+0.20}$ | 0.60 $^{+0.10}$ | 27 |
| ERJ12Z | | | | | 0.60 $^{+0.10}$ | |
| ERJL1D | 6.40 $^{+0.20}$ | 3.20 $^{+0.20}$ | 0.65 $^{+0.20}$ | 0.60 $^{+0.20}$ | 0.60 $^{+0.10}$ | 45 |
| ERJ1TR | | | | | 0.60 $^{+0.10}$ | |
| ERJL1W | 6.40 $^{+0.20}$ | 3.20 $^{+0.20}$ | 0.65 $^{+0.20}$ | 1.30 $^{+0.20}$ | 1.10 $^{+0.10}$ | 79 |

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Performance

- ERJ2LW, 3LW, 6LW, 2BW, 3BW, 6BW, 8BW, 6CW, 8CW
<High power (double-sided resistive elements structure) type>

| Test Item | Performance Requirements | Test Conditions |
|------------------------------|----------------------------|---|
| Resistance | Within Specified Tolerance | 20 °C |
| T. C. R. | Within Specified T. C. R. | +25 °C/+125 °C |
| Overload | ±2% | Rated Voltage × 2.0, 5 s ERJ6LW : × 1.77, 5 s ERJ8BW (R > 0.05 Ω) : × 1.77, 5 s |
| Resistance to Soldering Heat | ±1% | 270 °C, 10 s |
| Rapid Change of Temperature | ±1% ERJ2LW : ±2% | -55 °C (30 min.) / +155 °C (ERJ*LW, ERJ*CW : +125 °C) (30 min.), 100 cycles |
| High Temperature Exposure | ±1% | +155 °C (ERJ*LW, ERJ*CW : +125 °C), 1000 h |
| Damp Heat, Steady State | ±1% | 60 °C, 90% to 95%RH, 1000 h |
| Load Life in Humidity | ±3% | 60 °C, 90% to 95%RH, Rated Voltage, 1.5 h ON/0.5 h OFF cycle, 1000 h |
| Endurance at 70 °C | ±3% | 70 °C, Rated Voltage, 1.5 h ON/0.5 h OFF cycle, 1000 h |

- ERJ2BS/2BQ, 3BS/3BQ, 6BS/6BQ, 8BS/8BQ, 14BS/14BQ, 6D, 3R, 6R, 8R, 14R, 12R, 12Z, 1TR
<High power type/Standard type>

| Test Item | Performance Requirements | Test Conditions |
|------------------------------|----------------------------|--|
| Resistance | Within Specified Tolerance | 20 °C |
| T. C. R. | Within Specified T. C. R. | +25 °C/+125 °C |
| Overload | ±2% | Rated Voltage × 2.5 (ERJ6D : × 1.77), 5 s |
| Resistance to Soldering Heat | ±1% | 270 °C, 10 s |
| Rapid Change of Temperature | ±1% | -55 °C (30 min.) / +155 °C (30 min.), 100 cycles |
| High Temperature Exposure | ±1% | +155 °C, 1000 h |
| Damp Heat, Steady State | ±1% | 60 °C, 90% to 95%RH, 1000 h |
| Load Life in Humidity | ±3% | 60 °C, 90% to 95%RH, Rated Voltage, 1.5 h ON/0.5 h OFF cycle, 1000 h |
| Endurance at 70 °C | ±3% | 70 °C, Rated Voltage, 1.5 h ON/0.5 h OFF cycle, 1000 h |

- ERJL03, L06, L08, L14, L12, L1D, L1W <Low TCR type>

| Test Item | Performance Requirements | Test Conditions |
|------------------------------|----------------------------|--|
| Resistance | Within Specified Tolerance | 20 °C |
| T. C. R. | Within Specified T. C. R. | +25 °C/+125 °C |
| Overload | ±2% | Rated Voltage × 2.5, 5 s |
| Resistance to Soldering Heat | ±1% | 270 °C, 10 s |
| Rapid Change of Temperature | ±1% | -55 °C (30 min.) / +125 °C (30 min.), 100 cycles |
| High Temperature Exposure | ±1% | +125 °C, 1000 h |
| Damp Heat, Steady State | ±1% | 60 °C, 90% to 95%RH, 1000 h |
| Load Life in Humidity | ±3% | 60 °C, 90% to 95%RH, Rated Voltage, 1.5 h ON/0.5 h OFF cycle, 1000 h |
| Endurance at 70 °C | ±3% | 70 °C, Rated Voltage, 1.5 h ON/0.5 h OFF cycle, 1000 h |

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

⚠ Safety Precautions (Common precautions for Surface Mount Resistors)

The following are precautions for individual products. Please also refer to the common precautions for Fixed Resistors in this catalog.

1. Take measures against mechanical stress during and after mounting of Surface Mount Resistors (hereafter called the resistors) so as not to damage their electrodes and protective coatings.
Be careful not to misplace the resistors on the land patterns. Otherwise, solder bridging may occur.
2. Keep the rated power and ambient temperature within the specified derating curve.
Some circuit boards, wiring patterns, temperatures of heat generated by adjacent components, or ambient temperatures can become factors in the rise of the temperature of the resistors, regardless of the level of power applied. Therefore, check the conditions before use and optimize them so as not to damage the boards and peripheral components.
Make sure to contact us before using the resistors under special conditions.
3. If a transient load (heavy load in a short time) like a pulse is expected to be applied, check and evaluate the operations of the resistors when installed in your products before use.
Never exceed the rated power. Otherwise, the performance and/or reliability of the resistors may be impaired.
4. Before using halogen-based or other high-activity flux, check the possible effects of the flux residues on the performance and reliability of the resistors.
5. When soldering with a soldering iron, never touch the resistors' bodies with the tip of the soldering iron. When using a soldering iron with a high temperature tip, finish soldering as quickly as possible (within three seconds at 350 °C max.).
6. As the amount of applied solder becomes larger, the mechanical stress applied to the resistors increases, causing problems such as cracks and faulty characteristics. Avoid applying an excessive amounts of solder.
7. When the resistors' protective coatings are chipped, flawed, or removed, the characteristics of the resistors may be impaired. Take special care not to apply mechanical shock during automatic mounting or cause damage during handling of the boards with the resistors mounted.
8. Do not apply shock to the resistors or pinch them with a hard tool (e.g. pliers and tweezers). Otherwise, the resistors' protective coatings and bodies may be chipped, affecting their performance.
9. Avoid excessive bending of printed circuit boards in order to protect the resistors from abnormal stress.
10. Do not immerse the resistors in solvent for a long time. Before using solvent, carefully check the effects of immersion.
11. Transient voltage
If there is a possibility that the transient phenomenon (significantly high voltage applied in a short time) may occur or that a high voltage pulse may be applied, make sure to evaluate and check the characteristics of Fixed Metal (Oxide) Film Resistors mounted on your product rather than only depending on the calculated power limit or steady-state conditions to complete the design or decide to use the resistors.
12. Do not apply excessive tension to the terminals.

⚠ Safety Precautions (Common precautions for Fixed Resistors)

- When using our products, no matter what sort of equipment they might be used for, be sure to make a written agreement on the specifications with us in advance. The design and specifications in this catalog are subject to change without prior notice.
- Do not use the products beyond the specifications described in this catalog.
- This catalog explains the quality and performance of the products as individual components. Before use, check and evaluate their operations when installed in your products.
- Install the following systems for a failsafe design to ensure safety if these products are to be used in equipment where a defect in these products may cause the loss of human life or other significant damage, such as damage to vehicles (automobile, train, vessel), traffic lights, medical equipment, aerospace equipment, electric heating appliances, combustion/gas equipment, rotating equipment, and disaster/crime prevention equipment.
- * Systems equipped with a protection circuit and a protection device
- * Systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault

(1) Precautions for use

- These products are designed and manufactured for general and standard use in general electronic equipment (e.g. AV equipment, home electric appliances, office equipment, information and communication equipment)
- These products are not intended for use in the following special conditions. Before using the products, carefully check the effects on their quality and performance, and determine whether or not they can be used.
 1. In liquid, such as water, oil, chemicals, or organic solvent
 2. In direct sunlight, outdoors, or in dust
 3. In salty air or air with a high concentration of corrosive gas, such as Cl₂, H₂S, NH₃, SO₂, or NO₂
 4. Electric Static Discharge (ESD) Environment
These components are sensitive to static electricity and can be damaged under static shock (ESD). Please take measures to avoid any of these environments.
Smaller components are more sensitive to ESD environment.
 5. Electromagnetic Environment
Avoid any environment where strong electromagnetic waves exist.
 6. In an environment where these products cause dew condensation
 7. Sealing or coating of these products or a printed circuit board on which these products are mounted, with resin or other materials
- These products generate Joule heat when energized. Carefully position these products so that their heat will not affect the other components.
- Carefully position these products so that their temperatures will not exceed the category temperature range due to the effects of neighboring heat-generating components. Do not mount or place heat-generating components or inflammables, such as vinyl-coated wires, near these products.
- Note that non-cleaning solder, halogen-based highly active flux, or water-soluble flux may deteriorate the performance or reliability of the products.
- Carefully select a flux cleaning agent for use after soldering. An unsuitable agent may deteriorate the performance or reliability. In particular, when using water or a water-soluble cleaning agent, be careful not to leave water residues. Otherwise, the insulation performance may be deteriorated.

(2) Precautions for storage

The performance of these products, including the solderability, is guaranteed for a year from the date of arrival at your company, provided that they remain packed as they were when delivered and stored at a temperature of 5 °C to 35 °C and a relative humidity of 45 % to 85 %.

Even within the above guarantee periods, do not store these products in the following conditions. Otherwise, their electrical performance and/or solderability may be deteriorated, and the packaging materials (e.g. taping materials) may be deformed or deteriorated, resulting in mounting failures.

1. In salty air or in air with a high concentration of corrosive gas, such as Cl₂, H₂S, NH₃, SO₂, or NO₂
2. In direct sunlight

<Package markings>

Package markings include the product number, quantity, and country of origin. In principle, the country of origin should be indicated in English.

Guidelines and precautions regarding the technical information and use of our products described in this online catalog.

- If you want to use our products described in this online catalog for applications requiring special qualities or reliability, or for applications where the failure or malfunction of the products may directly jeopardize human life or potentially cause personal injury (e.g. aircraft and aerospace equipment, traffic and transportation equipment, combustion equipment, medical equipment, accident prevention, anti-crime equipment, and/or safety equipment), it is necessary to verify whether the specifications of our products fit to such applications. Please ensure that you will ask and check with our inquiry desk as to whether the specifications of our products fit to such applications use before you use our products.
- The quality and performance of our products as described in this online catalog only apply to our products when used in isolation. Therefore, please ensure you evaluate and verify our products under the specific circumstances in which our products are assembled in your own products and in which our products will actually be used.
- If you use our products in equipment that requires a high degree of reliability, regardless of the application, it is recommended that you set up protection circuits and redundancy circuits in order to ensure safety of your equipment.
- The products and product specifications described in this online catalog are subject to change for improvement without prior notice. Therefore, please be sure to request and confirm the latest product specifications which explain the specifications of our products in detail, before you finalize the design of your applications, purchase, or use our products.
- The technical information in this online catalog provides examples of our products' typical operations and application circuits. We do not guarantee the non-infringement of third party's intellectual property rights and we do not grant any license, right, or interest in our intellectual property.
- If any of our products, product specifications and/or technical information in this online catalog is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially with regard to security and export control, shall be observed.

<Regarding the Certificate of Compliance with the EU RoHS Directive/REACH Regulations>

- The switchover date for compliance with the RoHS Directive/REACH Regulations varies depending on the part number or series of our products.
- When you use the inventory of our products for which it is unclear whether those products are compliant with the RoHS Directive/REACH Regulation, please select "Sales Inquiry" in the website inquiry form and contact us.

We do not take any responsibility for the use of our products outside the scope of the specifications, descriptions, guidelines and precautions described in this online catalog.
