



# EC3H01B


## VHF Band Low-Noise Amplifier and OSC Applications

### Features

- Low noise : NF=1.8dB typ (f=150MHz).
- High gain :  $|S_{21e}|^2=16\text{dB}$  typ (f=150MHz).
- Ultraminiature (1006 size) and thin (0.5mm) leadless package.

### Package Dimensions

unit : mm  
2183

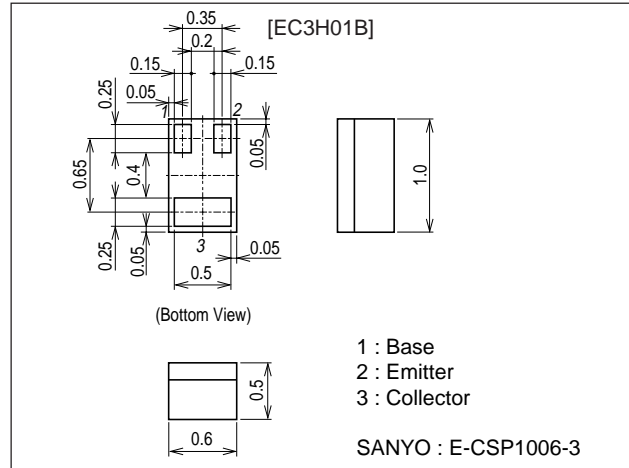

### Specifications

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V <sub>CB0</sub>		20	V
Collector-to-Emitter Voltage	V <sub>CE0</sub>		12	V
Emitter-to-Base Voltage	V <sub>EB0</sub>		2	V
Collector Current	I <sub>C</sub>		50	mA
Collector Dissipation	P <sub>C</sub>		100	mW
Junction Temperature	T <sub>j</sub>		150	°C
Storage Temperature	T <sub>stg</sub>		-55 to +150	°C

Electrical Characteristics at Ta=25°C

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I <sub>CBO</sub>	V <sub>CB</sub> =10V, I <sub>E</sub> =0			1.0	μA
Emitter Cutoff Current	I <sub>EBO</sub>	V <sub>EB</sub> =1V, I <sub>C</sub> =0			10	μA
DC Current Gain	h <sub>FE1</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =3mA	100		180	
	h <sub>FE2</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =50mA	70			
Gain Bandwidth Product	f <sub>T1</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =3mA	1.0	1.7		GHz
	f <sub>T2</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =20mA		5.0		GHz
Output Capacitance	C <sub>ob</sub>	V <sub>CB</sub> =10V, f=1MHz		1.1	1.8	pF
Reverse Transfer Capacitance	C <sub>re</sub>	V <sub>CB</sub> =10V, f=1MHz		0.8		pF
Forward Transfer Gain	S <sub>21e</sub>   <sup>2</sup>	V <sub>CE</sub> =2V, I <sub>C</sub> =3mA, f=150MHz	13	16		dB
Noise Figure	NF	V <sub>CE</sub> =2V, I <sub>C</sub> =3mA, f=150MHz		1.8	3.0	dB


■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.


Type No. Indication (Top view)









Electrical Connection (Top view)




\*Electrodes : on the bottom

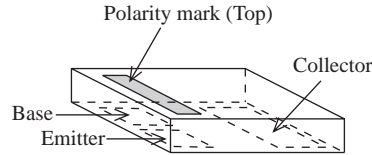

This product adopts a high-frequency process. Please be careful when handling it because it is susceptible to static electricity.

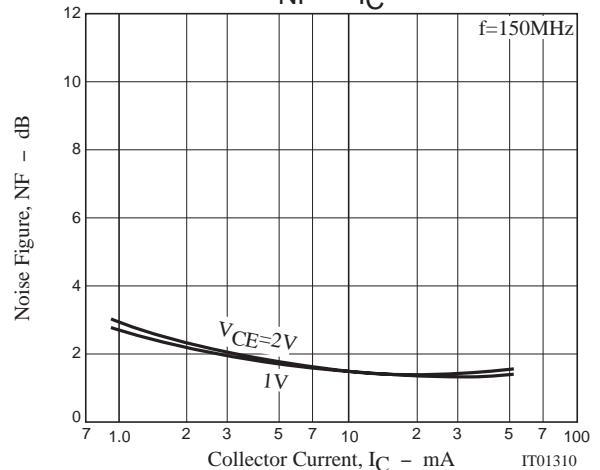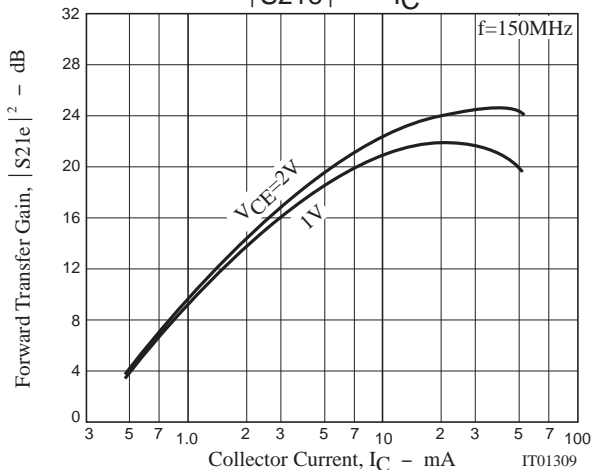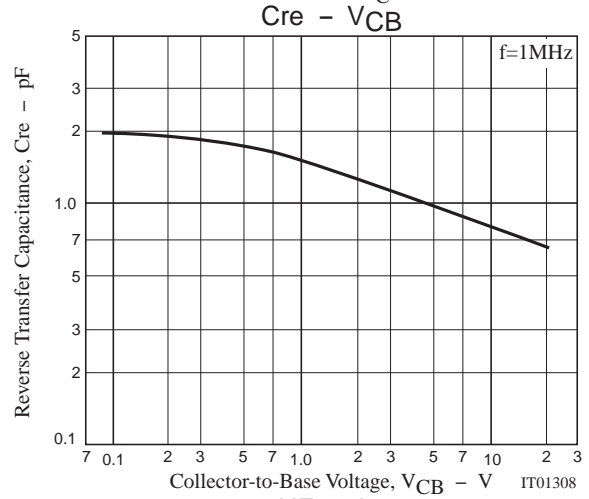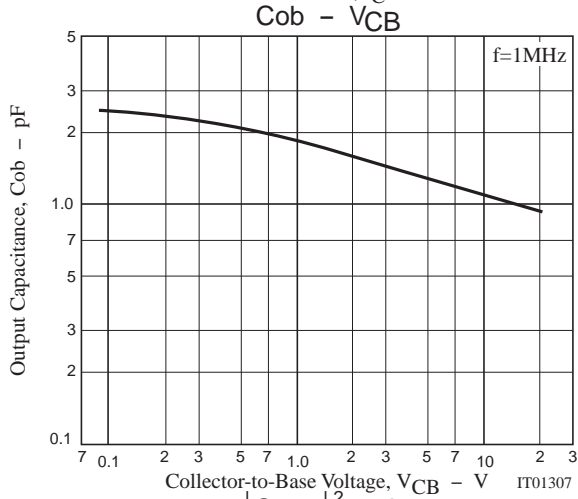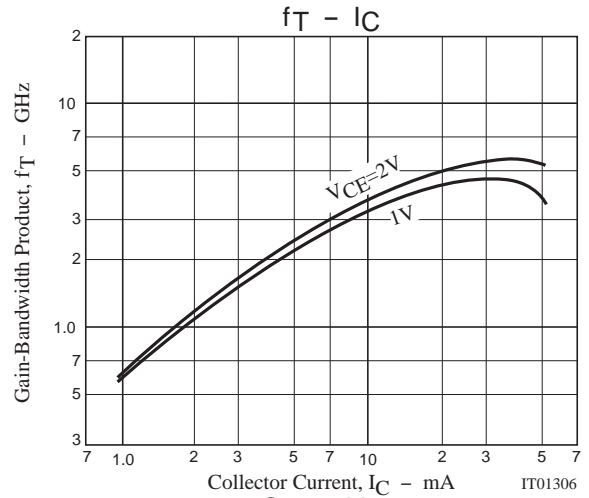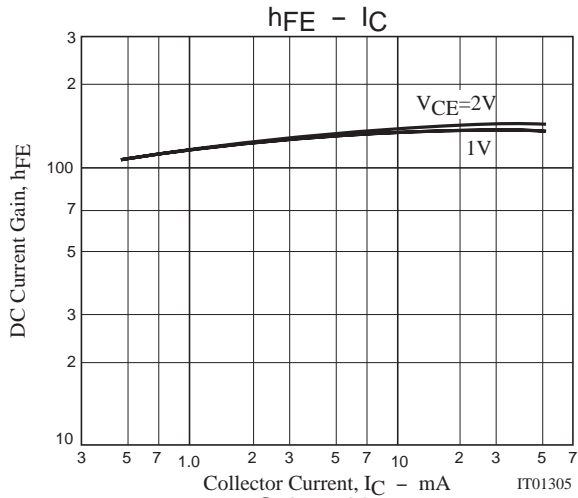

# EC3H01B

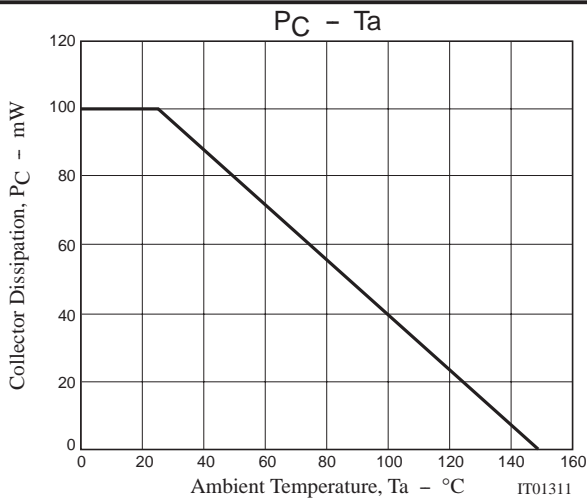

## S Parameters (Common emitter)

$V_{CE}=1V, I_C=3mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
50	0.896	-43.1	9.814	154.6	0.054	66.4	0.909	-23.3
100	0.877	-72.4	7.271	137.7	0.095	51.7	0.794	-35.5
150	0.835	-99.6	6.387	123.3	0.109	38.1	0.630	-52.5
200	0.826	-112.9	5.162	114.2	0.123	31.8	0.554	-56.6
250	0.815	-125.5	4.496	106.5	0.131	26.3	0.496	-60.0
300	0.815	-132.6	3.849	100.9	0.136	22.6	0.455	-63.1
350	0.799	-141.8	3.350	96.2	0.134	19.7	0.405	-69.4
400	0.798	-146.3	3.034	92.1	0.136	17.4	0.396	-69.6
450	0.798	-150.9	2.547	88.8	0.130	17.3	0.348	-77.8
500	0.793	-155.4	2.464	85.2	0.136	14.9	0.362	-75.3

$V_{CE}=1V, I_C=30mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
50	0.708	-116.6	31.386	124.6	0.031	45.7	0.651	-89.1
100	0.753	-145.8	18.450	107.7	0.039	34.5	0.531	-123.5
150	0.764	-157.7	12.776	100.4	0.041	35.5	0.499	-140.9
200	0.768	-164.1	9.666	96.0	0.044	38.1	0.481	-150.0
250	0.772	-167.9	7.795	92.9	0.048	42.0	0.475	-156.2
300	0.775	-170.8	6.539	90.4	0.052	45.3	0.472	-160.3
350	0.773	-173.0	5.627	88.2	0.056	46.9	0.472	-163.2
400	0.774	-174.7	4.926	86.5	0.060	50.0	0.471	-165.6
450	0.776	-176.2	4.406	85.0	0.063	51.5	0.471	-168.1
500	0.775	-177.7	3.971	83.3	0.068	53.1	0.468	-169.1

$V_{CE}=2V, I_C=1mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
50	0.960	-27.0	3.322	163.6	0.045	75.5	0.979	-8.0
100	0.958	-47.3	2.991	149.3	0.083	61.8	0.936	-14.7
150	0.923	-71.2	2.712	136.7	0.113	50.8	0.882	-20.5
200	0.919	-83.6	2.330	126.5	0.131	40.9	0.819	-25.4
250	0.904	-97.6	2.211	117.3	0.146	35.0	0.802	-27.2
300	0.902	-106.8	2.103	110.3	0.152	28.1	0.746	-31.3
350	0.879	-118.1	2.047	103.5	0.164	24.1	0.755	-32.0
400	0.876	-125.0	1.654	98.2	0.165	20.1	0.740	-33.9
450	0.868	-132.0	1.484	93.1	0.162	16.3	0.696	-37.1
500	0.860	-137.8	1.392	88.6	0.166	13.0	0.708	-38.3

## EC3H01B

V<sub>CE</sub>=2V, I<sub>C</sub>=3mA, Z<sub>O</sub>=50Ω

Freq(MHz)	S <sub>11</sub>	∠S <sub>11</sub>	S <sub>21</sub>	∠S <sub>21</sub>	S <sub>12</sub>	∠S <sub>12</sub>	S <sub>22</sub>	∠S <sub>22</sub>
50	0.910	-36.5	10.051	157.6	0.043	70.8	0.932	-18.0
100	0.882	-66.6	7.542	142.0	0.075	55.9	0.841	-27.7
150	0.854	-90.0	6.850	128.0	0.090	41.8	0.692	-41.3
200	0.837	-105.9	5.632	118.7	0.104	36.0	0.617	-44.6
250	0.825	-118.8	4.990	110.8	0.111	29.8	0.564	-46.9
300	0.817	-128.1	4.298	105.0	0.116	25.9	0.520	-49.5
350	0.805	-136.5	3.779	100.0	0.115	23.9	0.470	-53.5
400	0.803	-142.0	3.437	95.9	0.119	21.2	0.457	-53.7
450	0.802	-146.2	2.879	92.6	0.113	19.9	0.401	-59.5
500	0.797	-151.0	2.810	88.9	0.117	18.0	0.418	-57.5

V<sub>CE</sub>=2V, I<sub>C</sub>=10mA, Z<sub>O</sub>=50Ω

Freq(MHz)	S <sub>11</sub>	∠S <sub>11</sub>	S <sub>21</sub>	∠S <sub>21</sub>	S <sub>12</sub>	∠S <sub>12</sub>	S <sub>22</sub>	∠S <sub>22</sub>
50	0.781	-63.1	22.825	146.1	0.036	59.1	0.825	-38.9
100	0.765	-102.5	17.041	125.6	0.053	44.0	0.617	-63.6
150	0.755	-124.3	12.823	113.8	0.060	37.9	0.481	-80.1
200	0.749	-137.4	10.134	106.3	0.065	33.3	0.400	-89.9
250	0.750	-146.2	8.276	101.2	0.067	31.3	0.347	-99.5
300	0.748	-152.4	7.003	97.3	0.068	31.5	0.313	-105.1
350	0.747	-157.1	6.126	93.7	0.071	33.2	0.293	-111.8
400	0.747	-160.7	5.337	91.3	0.072	32.7	0.274	-116.3
450	0.747	-163.4	4.806	88.7	0.076	33.3	0.262	-119.8
500	0.746	-166.2	4.305	86.5	0.076	35.7	0.256	-124.2

V<sub>CE</sub>=2V, I<sub>C</sub>=30mA, Z<sub>O</sub>=50Ω

Freq(MHz)	S <sub>11</sub>	∠S <sub>11</sub>	S <sub>21</sub>	∠S <sub>21</sub>	S <sub>12</sub>	∠S <sub>12</sub>	S <sub>22</sub>	∠S <sub>22</sub>
50	0.668	-99.9	37.088	131.5	0.026	51.3	0.685	-68.6
100	0.708	-135.5	23.026	112.8	0.035	40.7	0.503	-102.7
150	0.721	-149.9	16.197	104.2	0.038	40.0	0.432	-122.1
200	0.725	-158.1	12.372	99.0	0.041	42.1	0.399	-134.2
250	0.728	-163.0	10.017	95.5	0.045	43.8	0.383	-142.9
300	0.733	-166.7	8.389	92.6	0.047	44.7	0.375	-148.4
350	0.730	-169.1	7.243	90.3	0.051	49.8	0.370	-152.3
400	0.733	-171.3	6.353	88.5	0.055	53.0	0.367	-155.8
450	0.732	-173.1	5.675	86.6	0.058	53.0	0.362	-158.4
500	0.734	-175.0	5.115	85.0	0.062	53.8	0.361	-160.5

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of July, 2000. Specifications and information herein are subject to change without notice.