

Technical Data Sheet

Full Color Chip LED (Chip LED with Right Angle Lens)

12-23A/R6GHBHC-A01/2D

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Full-color type.
- Pb Free
- The product itself will remain within RoHS compliant version.



Descriptions

- The 12-23A SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications


- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

	Lama Calan				
Type	Material	Emitted Color	Lens Color		
R6	AlGaInP	Brilliant Red			
GH	InGaN	Brilliant Green	Water Clear		
ВН	InGaN	Blue			

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 1 of 12

Package Outline Dimensions

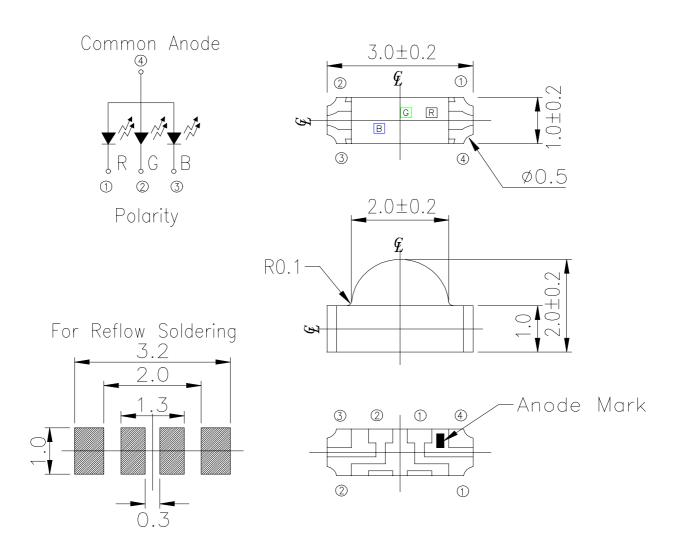

Note: The tolerances unless mentioned is ± 0.1 mm, Angle $\pm 0.5^{\circ}$, Unit = mm

Everlight Electronics Co., Ltd. Device No:DSE-123-004

http://www.everlight.com Prepared date: 07-26-2005

Rev 2

Page: 2 of 12



Absolute Maximum Ratings (Ta=25 $^{\circ}$ C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	5	V	
Forward Current	IF	R6:25 GH:25 BH:25	mA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$	
Soldering Temperature	Tsol	260 (for 5 seconds)	$^{\circ}\! \mathbb{C}$	
Electrostatic Discharge	ESD	R6:2000 GH:150 BH:150	V	
Power Dissipation	Pd	R6:60 GH:110 BH:110	mW	
Peak Forward Current (Duty 1/10 @1KHz)	IF (Peak)	R6:60 GH:100 BH:100	mA	

Everlight Electronics Co., Ltd.

Device No:DSE-123-004

http://www.everlight.com

Prepared date: 07-26-2005

Rev 2

Page: 3 of 12



Electro-Optical Characteristics (Ta=25°C)

			•	· · · · · · · · · · · · · · · · · · ·			
Parameter	Symbol		Min.	Тур.	Max.	Unit	Condition
		R6	57	90			
Luminous Intensity	Iv	GH	112	180		mcd	IF=20mA
		ВН	45	72			
Viewing Angle	2 θ 1/2			120		deg	I _F =20mA
		R6		632			
Peak Wavelength	λр	GH		518		nm	I _F =20mA
		ВН		468			
		R6		624			
Dominant Wavelength	λd	GH		525		nm	I _F =20mA
		ВН		470		11111	
		R6		20			
Spectrum Radiation Bandwidth	Δλ	GH		35		nm	I _F =20mA
	Е	ВН		35			
		R6		2.0	2.4		
Forward Voltage	VF	GH		3.5	3.9	V	I _F =20mA
		ВН		3.5	3.9		
	R	R6			10		
Reverse Current	IR	GH			50	μ A	V _R =5V
		ВН			50		


Notes:

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3. Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 4 of 12


Typical Electro-Optical Characteristics Curves

R6

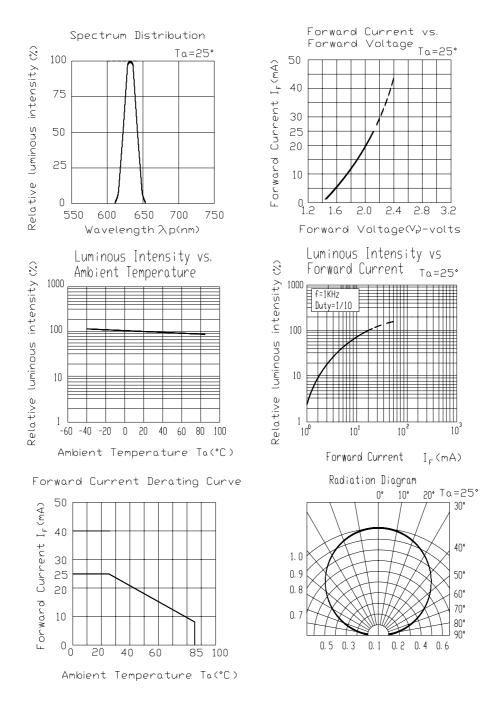

Typical Electro-Optical Characteristics Curves

GH

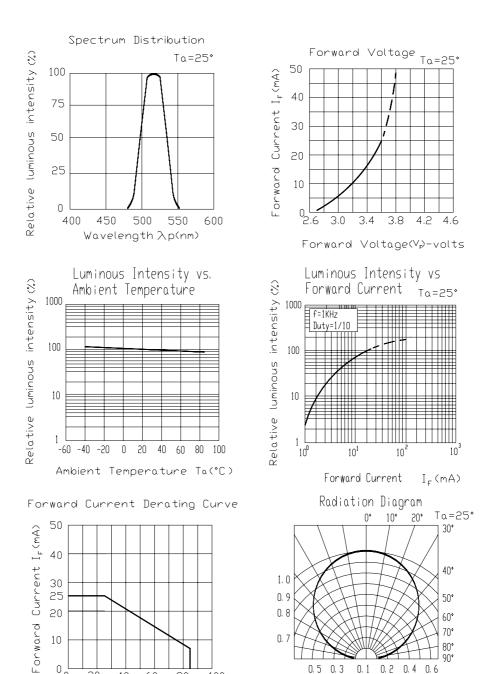


40 Ambient Temperature Ta(°C) 0.2 0.4 0.6

0.3

0. 1

Typical Electro-Optical Characteristics Curves

BH

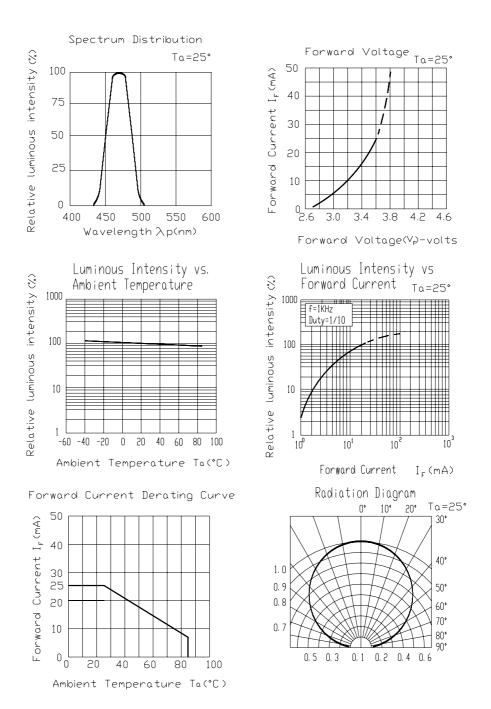

■ Label explanation


CAT: Luminous Intensity (mcd)

HUE: Dom. Wavelength (nm)

REF: Forward Voltage (V)



Reel Dimensions

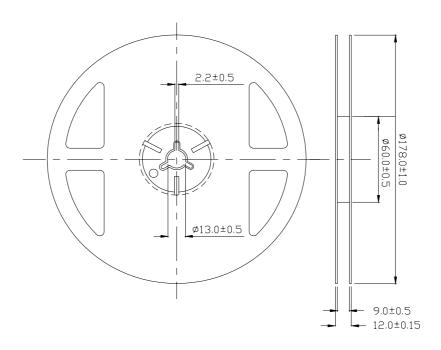

Note: The tolerances unless mentioned is ± 0.1 mm, Angle $\pm 0.5^{\circ}$, Unit = mm


 $Everlight\ Electronics\ Co.,\ Ltd.$

Device No:DSE-123-004

http://www.everlight.com Prepared date: 07-26-2005 Rev 2


Page: 8 of 12

■ Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

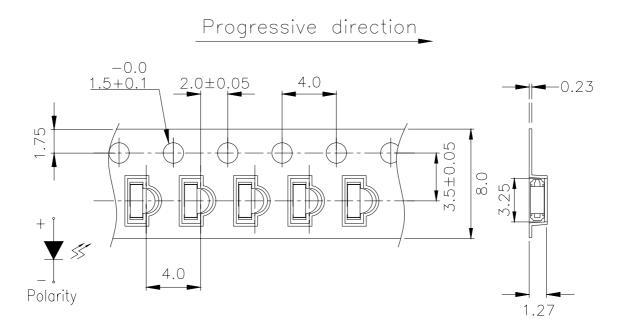

Note: The tolerances unless mentioned is ± 0.1 mm, Angle $\pm 0.5^{\circ}$, Unit = mm

■ Moisture Resistant Packaging

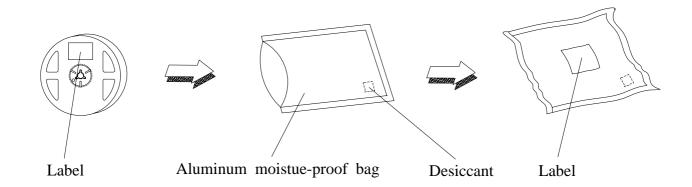

 $Everlight\ Electronics\ Co.,\ Ltd.$

Device No:DSE-123-004

http://www.everlight.com

Prepared date: 07-26-2005

Rev 2

Page: 9 of 12



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Rc
1	Reflow	Temp. : 240° C $\pm 5^{\circ}$ C Min. 5 sec.	6 min.	22 Pcs.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min. \int 5 min. $L: -40^{\circ}\mathbb{C}$ 15min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	H:+100°C 5min. ∫ 10 sec. L:-10°C 5min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -55°€	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C/R.H85%	1000 Hrs.	22 Pcs.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 10 of 12

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.


Baking treatment : 60 ± 5 °C for 24 hours.

3. Soldering Condition

3.1 Lead solder temperature profile

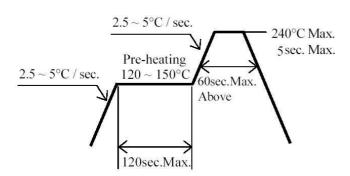

3.2 Lead free solder Lead solder temperature profile

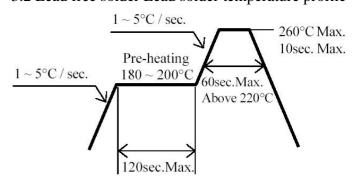

- 3.3 Reflow soldering should not be done more than two times.
- 3.4 When soldering, do not put stress on the LEDs during heating.
- 3.5 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 11 of 12




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

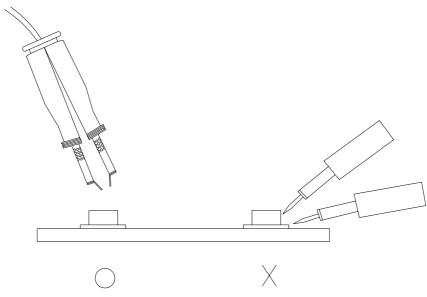

Everlight Electronics Co., Ltd. http://www.everlight.com

Device No:DSE-123-004 Prepared date: 07-26-2005 Prepared by: Jeff Tasi

Rev 2

Page: 12 of 12