# EVERLIGHT ELECTRONICS CO.,LTD.

### **Technical Data Sheet**

# 1206 Package Chip LED (1.1 mm Height)

### 15-21/GHC-YR1S1/2T

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.



### **Descriptions**

- The 15-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

### **Applications**


- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

#### **Device Selection Guide**


DADEN.	C	hip	T C 1	
PART No.	Material	<b>Emitted Color</b>	Lens Color	
15-21/GHC-YR1S1/2T	InGaN	Brilliant Green	Water Clear	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 1 of 10


### **Package Outline Dimensions**








For reflow soldering (propose)





**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. Device No: SZDSE-151-G01

http://www.everlight.com

Prepared date: 07-27-2005

Rev 3

Page: 2 of 10

Prepared by: Aihua hong



### **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	${ m I}_{ m F}$	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	Tstg	-40~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	260 (for 5 second)	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge	ESD	150	V
Power Dissipation	Pd	110	mW
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA

# **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	112		225	mcd	
Viewing Angle	2 \theta 1/2		140		deg	
Peak Wavelength	λр		518		nm	
Dominant Wavelength	λd	520		535	nm	I <sub>F</sub> =20mA
Spectrum Radiation Bandwidth	Δλ		35		nm	
Forward Voltage	VF		3.5	3.7	V	
Reverse Current	Ir			50	$\mu$ A	V <sub>R</sub> =5V

#### **Notes:**

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 3 of 10



### Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition
	X	520	525	nm	IF=20mA
Y	Y	525	530		
	Z	530	535		

# **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition
R1	112	140		
R2	140	180	mcd	IF=20mA
S1	180	225		


#### **Notes:**


1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 4 of 10


### **Typical Electro-Optical Characteristics**







Forward Current Derating Curve









Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 5 of 10

1.0

0. 9

0.8

### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 




#### **Reel Dimensions**

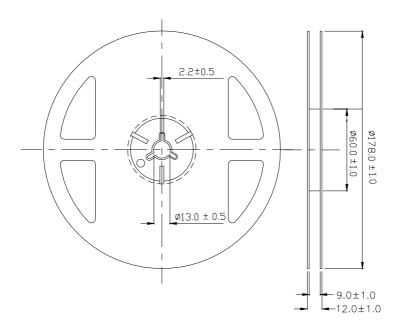

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 6 of 10

## Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

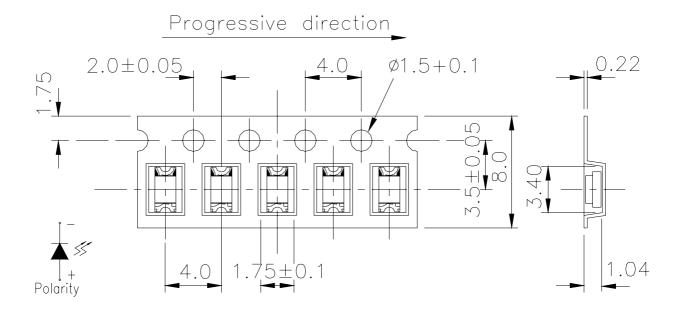

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

### **Moisture Resistant Packaging**

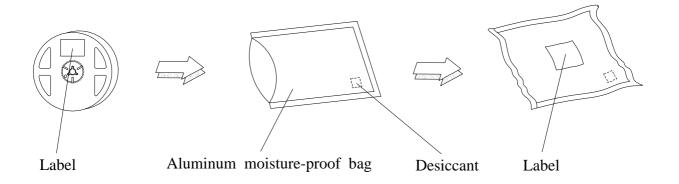

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 7 of 10



### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C 5 sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int$ 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 8 of 10

#### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

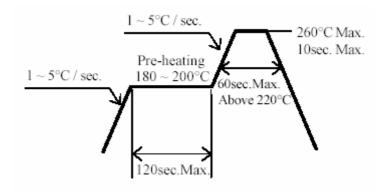

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron


Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 9 of 10



#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

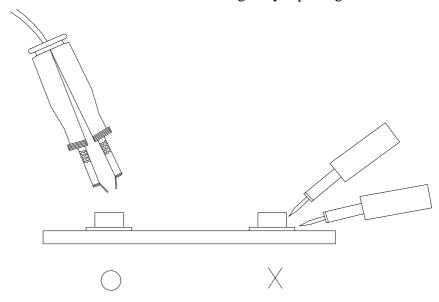

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 10 of 10