




Data Sheet



Product Category: RF SAW Filter

Part Number	Package	Application	Last Modified
802-RF457.6M-A	3.0 x 3.0 SMD	CDMA450(G-Band)	Jan. 01, 2007

TYPE :
CDMA450(G-Band), RF-Tx SAW Filter




PART NUMBER :
802-RF457.6M-A

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	Condition	Minimum	Typical	Maximum	Units
Center Frequency (Fo)	-	-	457.6	-	MHz
Maximum Insertion Loss	455.2~ 460.0MHz	-	1.9	3.2	dB
Stop Band Attenuation:	0.3~ 445.0 MHz	25	28	-	dB
	465.2~ 470.0 MHz	30	48	-	
	470.0~ 1700.0MHz	23	27	-	
	1700.0~ 2000.0 MHz	15	22	-	
Source Impedance (single ended)*	-	-	50	-	ohm
Load Impedance (single ended)*	-	-	50	-	ohm
VSWR	455.2~ 460.0MHz	-	1.3	2.0	-
Maximum Input Power	-	-	-	30	dBm
Operating Temperature	-	-30	-	+80	°C


* No Matching Network

PACKAGE OUTLINE (mm)

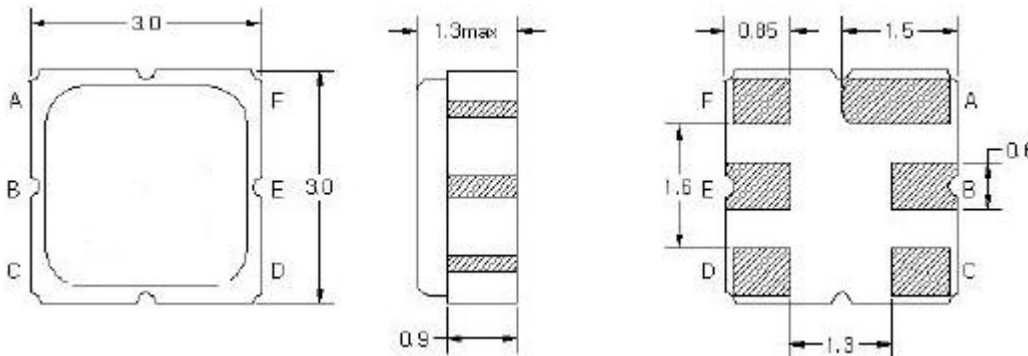



PIN LAYOUT	
A	Ground
B	Out
C	Ground
D	Ground
E	In
F	Ground

TEST FIXTURE


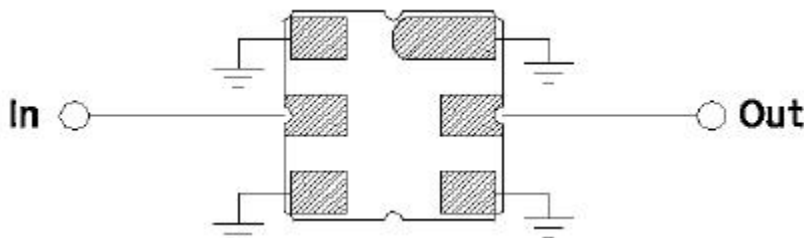


Source/ Load Impedance = 50 ohms



FREQUENCY RESPONSE

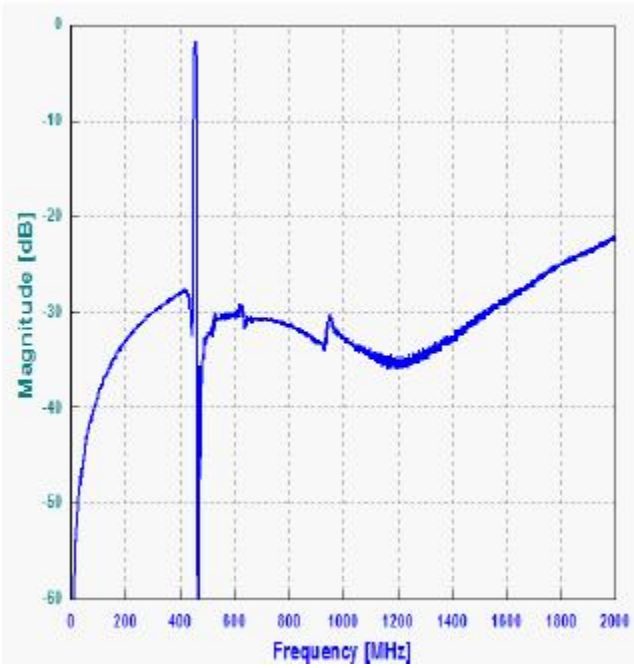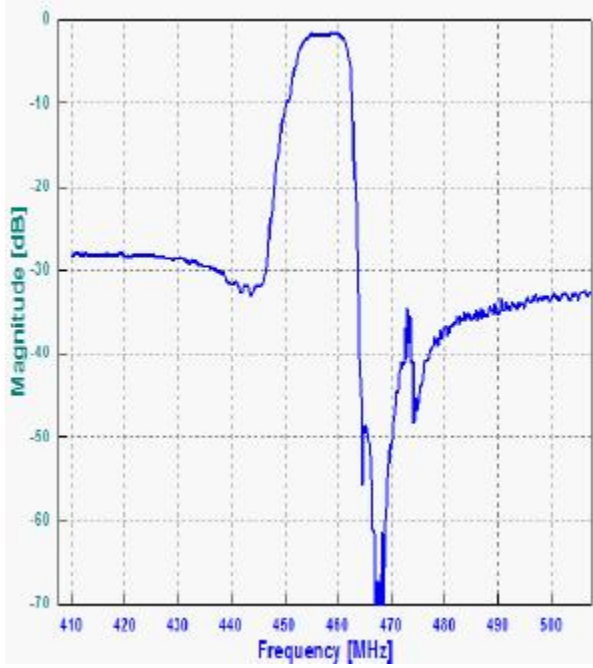

VSWR

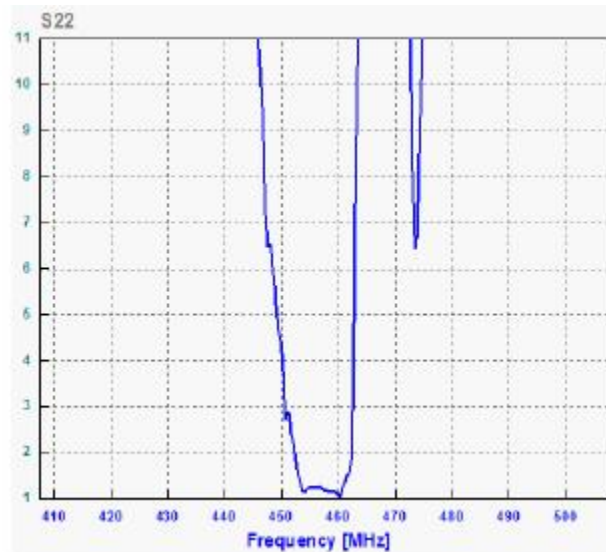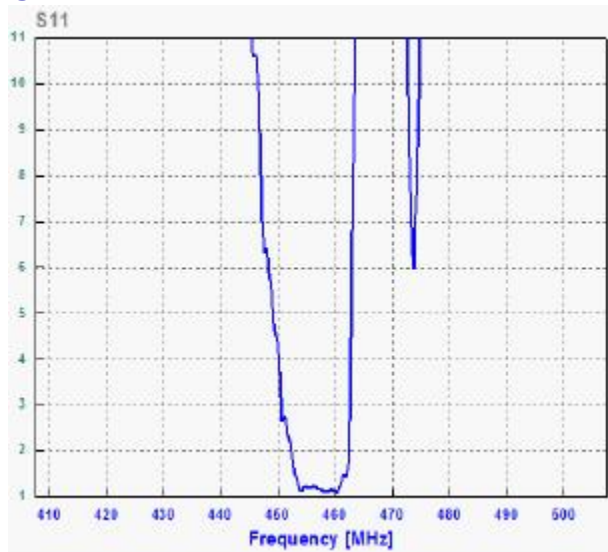

SMITH CHART

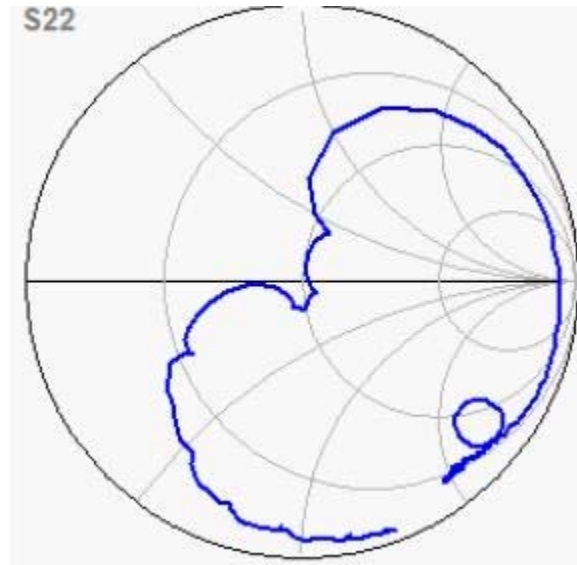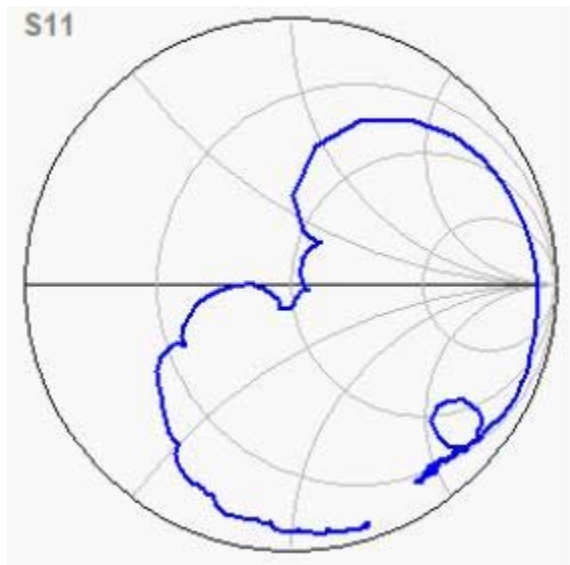

Oscilent Corporation - CALL **949.252.0522**

18195 East McDermott Street . Building D . Irvine . CA 92614 . USA
Fax: 949.252.0599 . E-Mail: Sales@Oscilent.com

Part No.: 802-RF457.6M-A