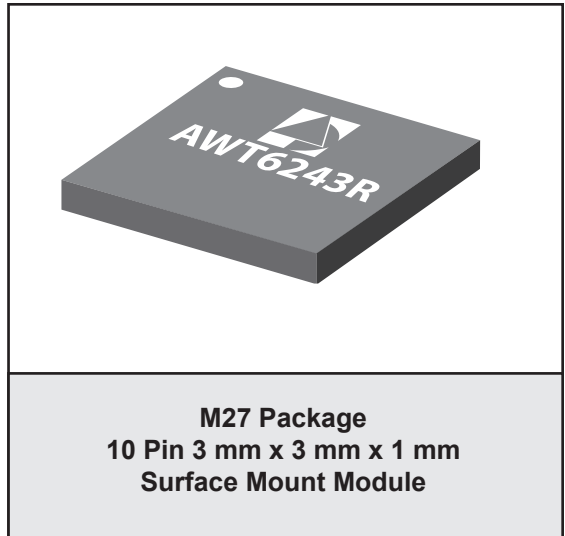


FEATURES

- InGaP HBT Technology
- High Efficiency:
 - 41 % @ P_{OUT} = +28.5 dBm
 - 22 % @ P_{OUT} = +16 dBm (without DC/DC-Converter)
- Low Quiescent Current: 9 mA (in low power mode)
- Low Leakage Current in Shutdown Mode: <1 μA
- Internal Voltage Regulator Eliminates the need for External Reference Voltage (V_{REF})
- HSPA Compliant
- Optimized for a 50 Ω System
- Low Profile Miniature Surface Mount Package: 1 mm
- RoHS Compliant Package, 250 °C MSL-3



APPLICATIONS

- WCDMA/HSPA AWS/KPCS band Wireless Handsets and Data Devices

PRODUCT DESCRIPTION

The AWT6243 HELP3™ PA is a next generation WCDMA product for UMTS handsets. This PA incorporates ANADIGICS' HELP3™ technology to provide low power consumption without the need for an external voltage regulator or DC/DC Converter.

The AWT6243 is manufactured on an advanced InGaP HBT MMIC technology offering state-of-the-art reliability, temperature stability, and ruggedness. There are two operating modes for optimum efficiency at high and medium/low power output levels. A shutdown mode with low leakage current increases handset talk and standby-time. The self-contained 3 mm x 3 mm x 1 mm surface mount package incorporates matching networks optimized for output power, efficiency, and linearity in a 50 Ω system.

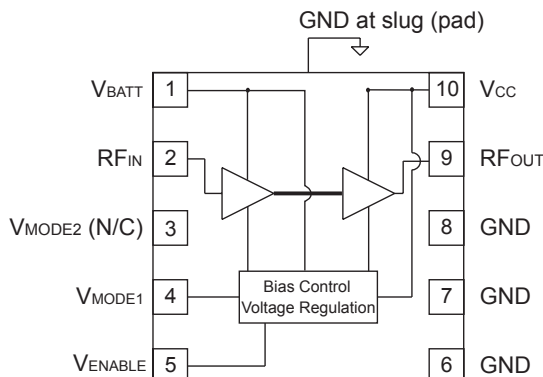
Figure 1: Block Diagram

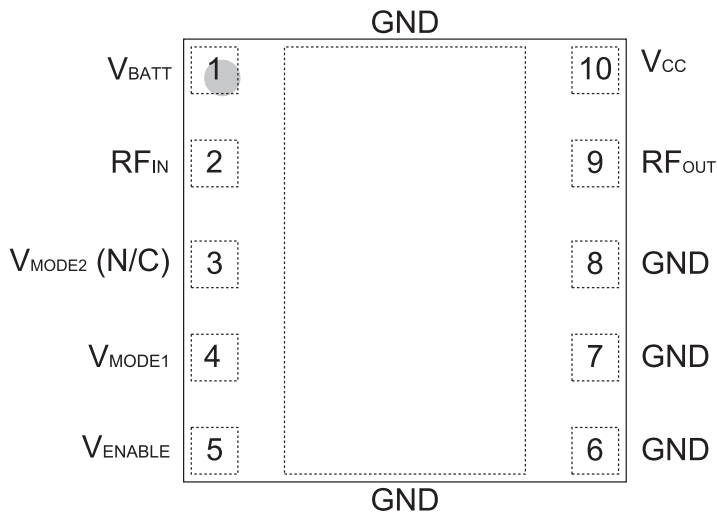


Figure 2: Pinout (X-ray Top View)

Table 1: Pin Description

| PIN | NAME | DESCRIPTION |
|-----|-------------------|------------------------|
| 1 | V_{BATT} | Battery Voltage |
| 2 | RF_{IN} | RF Input |
| 3 | V_{MODE2} (N/C) | No Connection |
| 4 | V_{MODE1} | Mode Control Voltage 1 |
| 5 | V_{ENABLE} | PA Enable Voltage |
| 6 | GND | Ground |
| 7 | GND | Ground |
| 8 | GND | Ground |
| 9 | RF_{OUT} | RF Output |
| 10 | V_{CC} | Supply Voltage |

ELECTRICAL CHARACTERISTICS

Table 2: Absolute Minimum and Maximum Ratings

| PARAMETER | MIN | MAX | UNIT |
|---|-----|------|------|
| Supply Voltage (V_{CC}) | 0 | +5 | V |
| Battery Voltage (V_{BATT}) | 0 | +6 | V |
| Control Voltages (V_{MODE1} , V_{ENABLE}) | 0 | +3.5 | V |
| RF Input Power (P_{IN}) | - | +10 | dBm |
| Storage Temperature (T_{STG}) | -40 | +150 | °C |

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

Table 3: Operating Ranges

| PARAMETER | MIN | TYP | MAX | UNIT | COMMENTS |
|---|--|--------------------------|--------------------------|------|--|
| Operating Frequency (f) | 1710 | - | 1785 | MHz | |
| Supply Voltage (V_{CC}) | +3.2 | +3.4 | +4.2 | V | $P_{OUT} < +28.5$ dBm |
| Enable Voltage (V_{ENABLE}) | +2.15 0 | +2.4 - | +3.1 +0.5 | V | PA "on" PA "shut down" |
| Mode Control Voltage (V_{MODE1}) | +2.15 0 | +2.4 - | +3.1 +0.5 | V | Low Bias Mode High Bias Mode |
| RF Output Power (P_{OUT}) Rel99 WCDMA, HPM HSPA (MPR = 0), HPM Rel99 WCDMA, LPM HSPA (MPR = 0), LPM | 28.0 ⁽¹⁾ 27.0 ⁽¹⁾ 15.5 ⁽¹⁾ 14.5 ⁽¹⁾ | 28.5 27.5 16 15 | 28.5 27.5 16 15 | dBm | 3GPP TS 34.121-1, Rel 7 Table C.11.1.3 |
| Case Temperature (T_C) | -20 | - | +90 | °C | |

Note:

(1) For operations at $V_{CC} = +3.2V$, P_{OUT} is derated by 0.5 dB.

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

Table 4: Electrical Specifications
 (T_C = +25 °C, V_{CC} = +3.4 V, V_{BATT} = +3.4 V, V_{ENABLE} = +2.4 V, 50 Ω system)

| PARAMETER | MIN | TYP | MAX | UNIT | COMMENTS | |
|--|--------------|----------------------|----------------------|--------|--|--------------------|
| | | | | | P _{OUT} | V _{MODE1} |
| Gain | 25.0 12.0 | 27.5 14.0 | 30.5 17.0 | dB | +28.5 dBm +16 dBm | 0 V +2.4 V |
| ACLR1 at 5 MHz offset ⁽¹⁾ | - - | -41 -43 | -37.5 -37.5 | dBc | +28.5 dBm +16 dBm | 0 V +2.4 V |
| ACLR2 at 10 MHz offset | - - | -56 -53 | -48 -48 | dBc | +28.5 dBm +16 dBm | 0 V +2.4 V |
| Power-Added Efficiency ⁽¹⁾ (without DC/DC Converter) | 37 18 | 41 22 | - - | % | +28.5 dBm +16 dBm | 0 V +2.4 V |
| Quiescent Current (I _q) Low Bias Mode | - | 9.5 | 14.5 | mA | V _{MODE1} = +2.4 V | |
| Mode Control Current | - | 0.3 | 0.8 | mA | through V _{MODE} pin, V _{MODE1} = +2.4 V | |
| Enable Current | - | 0.35 | 0.8 | mA | through V _{ENABLE} pin | |
| BATT Current | - | 3.0 | 5 | mA | through V _{BATT} pin, V _{MODE1} = +2.4 V | |
| Leakage Current | - | <1 | 5 | μA | V _{BATT} = +4.2 V, V _{CC} = +4.2 V, V _{ENABLE} = 0 V, V _{MODE1} = 0 V | |
| Noise in Receive Band | - - - | -136 -145 -137 | -134 -141 -135 | dBm/Hz | 1845 - 1880 MHz 2110 - 2155 MHz 1574.4 - 1576.4 MHz | |
| Harmonics 2fo 3fo, 4fo | - - | -41 -55 | -30 -35 | dBc | P _{OUT} ≤ +28.5 dBm | |
| Input Impedance | - | 2:1 | - | VSWR | | |
| Spurious Output Level (all spurious outputs) | - | - | -70 | dBc | See note 2. | |
| Load mismatch stress with no permanent degradation or failure | 8:1 | - | - | VSWR | Applies over full operating range | |

Notes:

(1) ACLR and Efficiency measured at 1747.5 MHz.

2. P_{OUT} < +28.5 dBm; In-band load VSWR < 5:1; Out-of-band load VSWR < 10:1; Applies over all operating conditions.

APPLICATION INFORMATION

To ensure proper performance, refer to all related Application Notes on the ANADIGICS web site: <http://www.anadigics.com>

Shutdown Mode

The power amplifier may be placed in a shutdown mode by applying logic low levels (see Operating Ranges table) to the V_{ENABLE} and V_{MODE1} voltages.

Bias Modes

The power amplifier may be placed in either a Low Bias mode or a High Bias mode by applying the appropriate

logic level (see Operating Ranges table) to V_{MODE1} . The Bias Control table lists the recommended modes of operation for various applications. V_{MODE2} is not necessary for this PA.

Two operating modes are available to optimize current consumption. High Bias/High Power operating mode is for P_{OUT} levels ≥ 16 dBm. At around 16 dBm output power, the PA should be "Mode Switched" to Medium/Low power mode for lowest quiescent current consumption.

Table 5: Bias Control

| APPLICATION | P_{OUT} LEVELS | BIAS MODE | V_{ENABLE} | V_{MODE1} | V_{CC} | V_{BATT} |
|---|------------------|-----------|--------------|-------------|-------------|--------------|
| UMTS - med/low power (Low Bias Mode) | $\leq +16$ dBm | Low | +2.4 V | +2.4 V | 3.2 - 4.2 V | ≥ 3.2 V |
| UMTS - high power (High Bias Mode) | $> +16$ dBm | High | +2.4 V | 0 V | 3.2 - 4.2 V | ≥ 3.2 V |
| Optional lower V_{CC} in low power mode | $\leq +6$ dBm | Low | +2.4 V | +2.4 V | 1.5 V | ≥ 3.2 V |
| Shutdown | - | Shutdown | 0 V | 0 V | 3.2 - 4.2 V | ≥ 3.2 V |


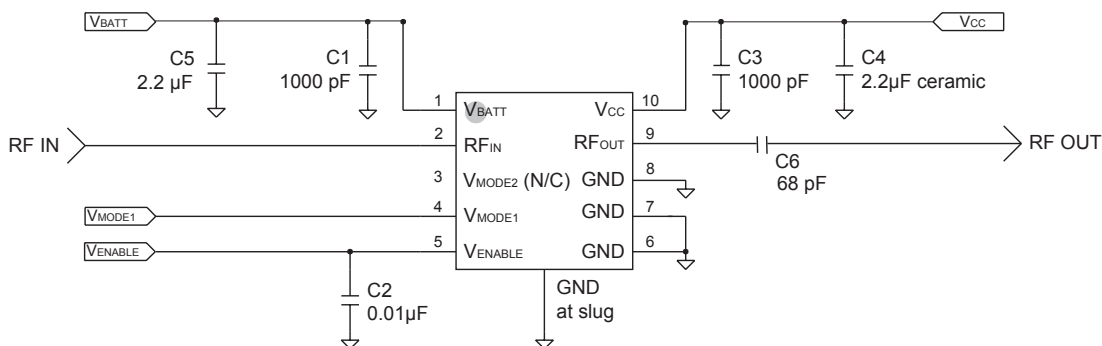


Figure 3: Evaluation Board Circuit Schematic

PACKAGE OUTLINE

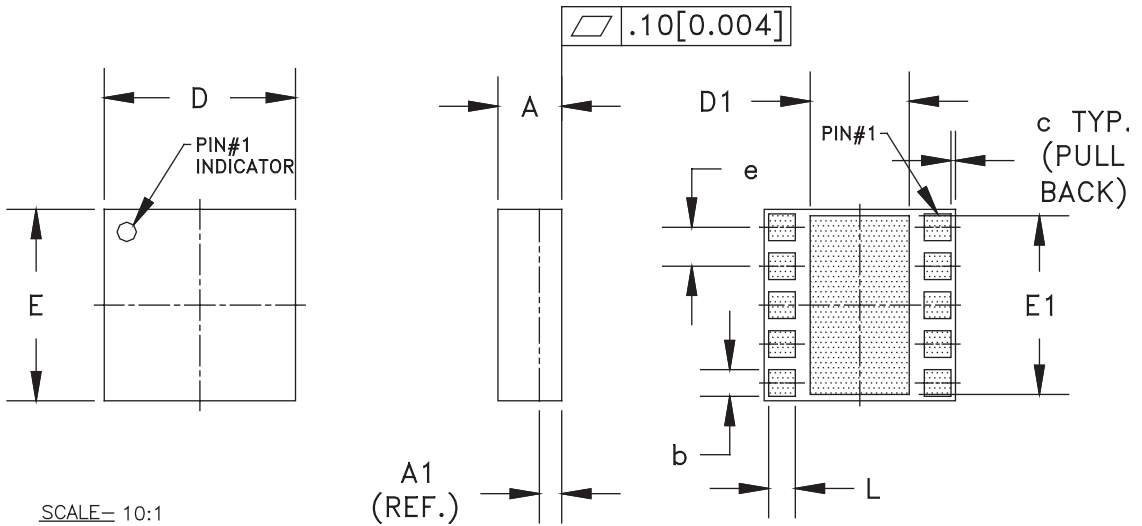

| SYMBOL | MILLIMETERS | | | INCHES | | | NOTE |
|--------|-------------|------|------|--------------|-------|-------|------|
| | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. | |
| A | 0.91 | 1.01 | 1.11 | 0.035 | 0.039 | 0.043 | — |
| A1 | 0.35 (REF.) | | | 0.014 (REF.) | | | — |
| b | 0.33 | — | 0.52 | 0.013 | — | 0.020 | 3 |
| c | — | 0.10 | — | — | 0.004 | — | — |
| D | 2.88 | 3.00 | 3.12 | 0.113 | 0.118 | 0.123 | — |
| D1 | 1.57 | — | 1.82 | 0.062 | — | 0.072 | 3 |
| E | 2.88 | 3.00 | 3.12 | 0.113 | 0.118 | 0.123 | — |
| E1 | 2.75 | — | 2.85 | 0.108 | — | 0.112 | 3 |
| e | 0.61 | | | 0.024 | | | 3 |
| L | 0.33 | — | 0.52 | 0.013 | — | 0.020 | 3 |

NOTES:

1. CONTROLLING DIMENSIONS: MILLIMETERS
2. UNLESS SPECIFIED TOLERANCE=±0.076[0.003].
3. PADS (INCLUDING CENTER) SHOWN UNIFORM SIZE FOR REFERENCE ONLY. ACTUAL PAD SIZE AND LOCATION WILL VARY WITHIN MIN. AND MAX. DIMENSIONS ACCORDING TO SPECIFIC LAMINATE DESIGN.
4. UNLESS SPECIFIED DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINES SHOWN.

Figure 4: M27 Package Outline - 10 Pin 3 mm x 3 mm x 1 mm Surface Mount Module

TOP BRAND




NOTES:

1. ANADIGICS LOGO SIZE: NONE
2. PART NUMBER: 6243R
3. WAFER LOT NUMBER: LLLL = FOUR DIGIT LOT NUMBER
NN = TWO DIGIT WAFER NUMBER
4. PIN 1 INDICATOR: LASER DOT
5. B.O.M. #: 106
6. COUNTRY CODE: CC = TH -for- THAILAND, TW -for- TAIWAN,
PH -for- PHILIPPINES, CH -for- CHINA,
ID -for- INDONESIA, HK -for- HONG KONG
7. TYPE : ARIAL
SIZE : 1.5-POINT
COLOR : LASER

Figure 5: Branding Specification - M27 Package

COMPONENT PACKAGING

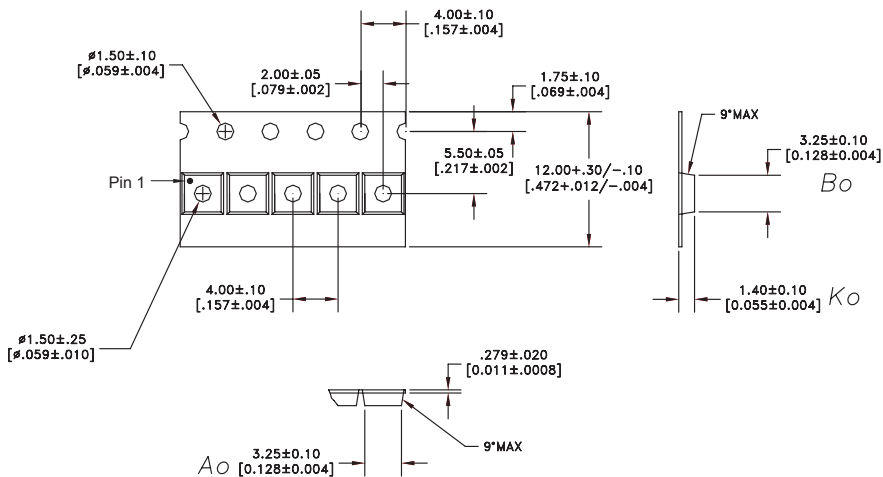

NOTES:

- 1. MATERIAL: 3000 (CARBON FILLED POLYCARBONATE)
100% RECYCLABLE.

DIMENSIONS ARE IN MILLIMETERS [INCHES]

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

Figure 6: Tape & Reel Packaging

Table 6: Tape & Reel Dimensions

| PACKAGE TYPE | TAPE WIDTH | POCKET PITCH | REEL CAPACITY | MAX REEL DIA |
|--------------------|------------|--------------|---------------|--------------|
| 3 mm x 3 mm x 1 mm | 12 mm | 4 mm | 2500 | 7" |

ORDERING INFORMATION

| ORDER NUMBER | TEMPERATURE RANGE | PACKAGE DESCRIPTION | COMPONENT PACKAGING |
|---------------|-------------------|---|-------------------------------------|
| AWT6243RM27Q7 | -20 °C to +90 °C | RoHS Compliant 10 Pin 3 mm x 3 mm x 1 mm Surface Mount Module | Tape and Reel, 2500 pieces per Reel |
| AWT6243RM27P9 | -20 °C to +90 °C | RoHS Compliant 10 Pin 3 mm x 3 mm x 1 mm Surface Mount Module | Partial Tape and Reel |

**ANADIGICS, Inc.**

141 Mount Bethel Road
Warren, New Jersey 07059, U.S.A.

Tel: +1 (908) 668-5000

Fax: +1 (908) 668-5132

URL: <http://www.anadigics.com>

E-mail: Mktg@anadigics.com

IMPORTANT NOTICE

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.