

# PWR12xxC

3 Watts Unregulated DC/DC Converters



## FEATURES

- ROHS COMPLIANT
- LOW COST
- INDUSTRY-STANDARD PACKAGE
- SINGLE AND DUAL OUTPUTS
- 24-PIN DIP PACKAGE
- BUILT-IN STANDOFFS
- INTERNAL INPUT AND OUTPUT FILTERING


### **MECHANICAL**

## DESCRIPTION

The PWR12xxC Series offers a broad line of low-cost, high-performance, unregulated, single and dual output DC/DC converters in a 24-pin DIP package. These miniature converters offer better performance and lower cost in industry-standard packages and pinouts. The PWR12xxC Series is internally filtered. No external parts are necessary.

Surface mounted components and a low thermal resistance encapsulant allow for superior reliability, excellent thermal dissipation, and an extended temperature range of  $-25^{\circ}$ C to  $+85^{\circ}$ C at no extra cost.

The PWR12xxC Series is ideal for use on high-density PC boards where isolated, unregulated, power is needed. Standoffs allow for PC board cleaning, helping preserve isolation. They also allow for visual inspection of solder joints.

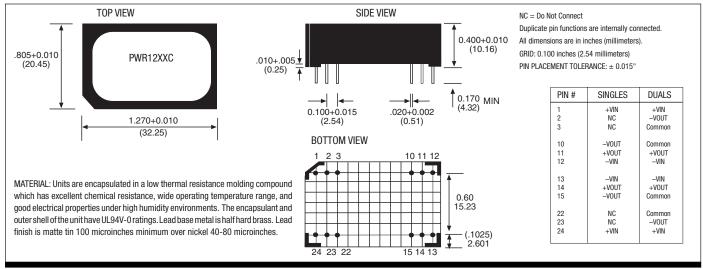



www.murata-ps.com

Technical enquiries email: sales@murata-ps.com, tel: +1 508 339 3000

## muRata Ps Murata Power Solutions

## PWR12xxC

3 Watts Unregulated DC/DC Converters

### **ELECTRICAL SPECIFICATIONS**

Specifications typical at  $T_A = +25^{\circ}$ C, nominal input voltage, rated output current unless otherwise noted.

	NOMINAL INPUT VOLTAGE (VDc)	RATED OUTPUT VOLTAGE (VDc)	RATED OUTPUT CURRENT (mA)	INPUT CURRENT		REFLECTED
MODEL				NO LOAD	RATED LOAD	RIPPLE CURRENT (mAp-p)
				(mA)	(mA)	
PWR1200C	5	5	600	30	800	45
PWR1201C	5	12	250	30	800	45
PWR1202C		15	200		800	45
PWR1203C		<u>±5</u>	±300		800	45
PWR1204C		±12	±125	30	800	45
PWR1205C	5	±15	±100	30	800	45
PWR1206C	12	5	600	30	330	25
PWR1207C	12	12	250	30	330	
PWR1208C	12	15	200	30	330	25
PWR1209C	12	±5	±300		330	- 25
PWR1210C	12	±12	±125		330	
PWR1211C	12	±15	±100	30	330	
PWR1212C	15	5	600	30	265	
PWR1213C	15	12	250		265	20
PWR1214C	15	15	200	30	265	20
PWR1215C	15	±5	±300	30	265	20
PWR1216C	15	±12	±125		265	20
PWR1217C	15	±15	±100		265	20
PWR1218C	24	5	600	30	165	20
PWR1219C	24	12	250		165	20
PWR1220C	24	15	200		165	20
PWR1221C		<u>±5</u>	±300	30	165	20
PWR1222C		±12	±125		165	20
PWR1223C	24	±15	±100	30	165	20
PWR1240C	5	9	333	30	800	45
PWR1241C	12	9	333	30	330	25
PWR1242C	15	9	333		265	20
PWR1243C	24	9	333		165	20

NOTE: Models listed with strike-through text have been officially discontinued. These models can be built on a custom basis with sufficient quantity justification. Contact factory for details.

#### **COMMON SPECIFICATIONS**

Specifications typical at  $T_A = +25^{\circ}$ C, rated input voltage, rated output current unless otherwise noted.

PARAMETER	CONDITIONS	MIN	ТҮР	МАХ	UNITS
INPUT Voltage Range		4.5 10.8 13.5 21.6	5 12 15 24	5.5 13.2 16.5 26.4	VDC VDC VDC VDC VDC
ISOLATION Rated Voltage Test Voltage Resistance Capacitance Leakage Current	60 Hz, 10 Seconds Viso = 240Vac, 60HZ	500 500	10 90 10		Voc Vpk GΩ pF μArms
OUTPUT Rated Power Voltage Setpoint Accuracy Temperature Coefficient Ripple and Noise (BW = DC to 20MHz) Voltage	Rated Load, Nominal Vi No External Components 10µF Across Each Output 10µF Across Each Output No Load,Vour = +5V No Load,Vour = ±12V		3 ±3 ±0.02 150 10 30	±5 7 ±15	W % %/%°C mVp-p mVrms mVp-p Vpc Vpc
Regulation Load	No Load To Rated Load		1.2 6	±18	Vbc Line %/%V <sub>№</sub> %
GENERAL Package Weight Switching Frequency MTTF per MIL-HDBK-217, Rev E Efficiency	Circuit Stress Method		12 150 700 75		g kHz kHr %
TEMPERATURE Specification Operation Storage		-25 -40 -40	+25	+85 +125 +125	3° 3° 3°

## muRata Ps Murata Power Solutions


## PWR12xxC

### 3 Watts Unregulated DC/DC Converters

#### **ABSOLUTE MAXIMUM RATINGS**

Output Short-Circ	cuit Duration	Momentary
Internal Power Di	issipation	1.3W
Lead Temperatur	re (soldering, 10 seconds max)	+300°C

#### **ORDERING INFORMATION**

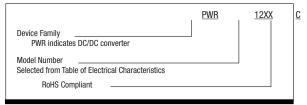

### **APPLICATION NOTES**

#### UNBALANCED LOADS


Unbalanced loads may be used on dual output models with either side providing up to its rated current. Output voltages, by design, will track each other in an unbalanced state within  $\pm 10\%$  of one another.

#### OUTPUT NOISE

Output noise can be reduced to 30mVp-p, typically, by adding a  $10\mu$ F tantalum capacitor with an equivalent series resistance (ESR) of less than 150m $\Omega$  at 10kHz across each output.

### TYPICAL PERFORMANCE CURVES


 $T_A = +25^{\circ}C$ , Rated Input Voltage, Rated Output Current unless otherwise noted.

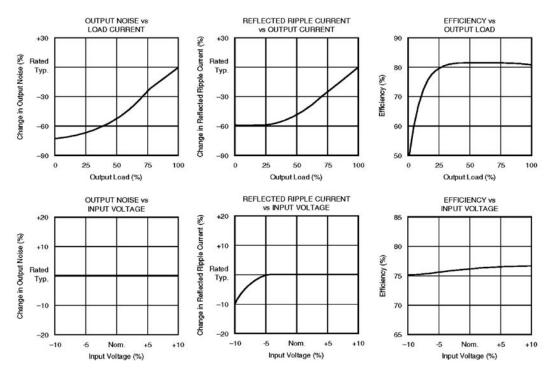

#### **SOLDERING INFORMATION**

The PWR12xxC devices are intended for wave soldering or manual soldering. They are not intended to be subject to surface mount processes under any circumstances.

The normal wave soldering process can be used with these devices where the device is subjected to a maximum wave temperature of 260°C for a period of no more than 10 seconds. Within this time and temperature range, the integrity of the device's plastic body will not be compromised and internal temperatures within the converter will not exceed 175°C. Care should be taken to control manual soldering limits identical to that of wave soldering.

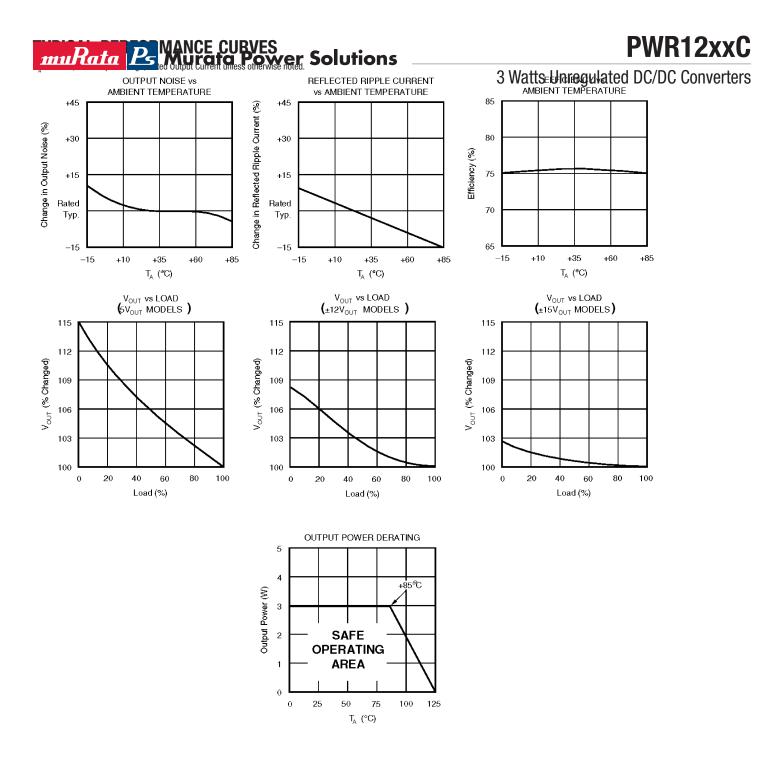

## muRata Ps Murata Power Solutions

Murata Power Solutions, Inc.

11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.

Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356

www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED 07/16/08

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

	USA:	Mansfield (MA), Tel: (508) 339-3000, email: sales@murata-ps.com
L	Canada:	Toronto, Tel: (866) 740-1232, email: toronto@murata-ps.com
L	UK:	Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com
L	France:	Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com
L	Germany:	München, Tel: +49 (0)89-544334-0, email: munich@murata-ps.com
	Japan:	Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com Website: www.murata-ps.jp
	China:	Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com

www.murata-ps.com