


## ENERGIZER NO. EN93



Industry Standard Dimensions in mm (inches)

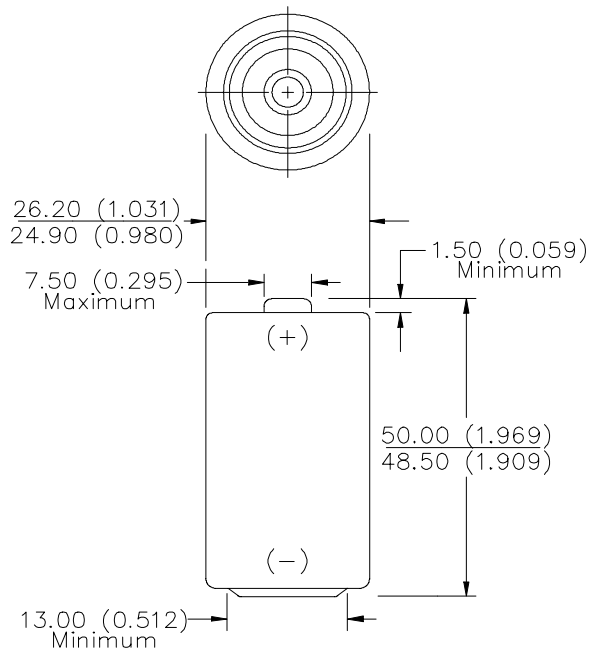


Negative cover detail referenced on page 2

**C**


**NOT INTENDED FOR RETAIL TRADE**

- Chemical System:** Alkaline  
 Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)  
 (No Added Mercury or Cadmium)
- Designation:** ANSI-14A, IEC-LR14
- Battery Voltage:** 1.5 Volts
- Internal Resistance:** 324 Milliohms (Fresh)
- Operating Temp:** -18°C to 55°C (0°F to 130°F)
- Average Capacity:** 8,350 mAh (to 0.8 volts)  
 (Rated capacity at 25 mA continuous drain)
- Average Weight:** 66.2 grams (2.3 oz.)
- Volume:** 26.9 cubic centimeters (1.6 cubic inch)
- Cell:** One No. 3-335 (size 'C')
- Jacket:** Plastic Label
- Shelf Life:** 7 years (80% of rated capacity)


### TEMPERATURE EFFECTS Typical Service to 0.8 Volts

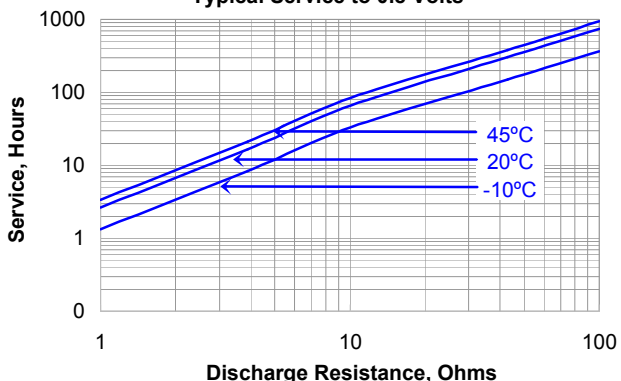

### CONSTANT RESISTANCE PERFORMANCE Typical Service

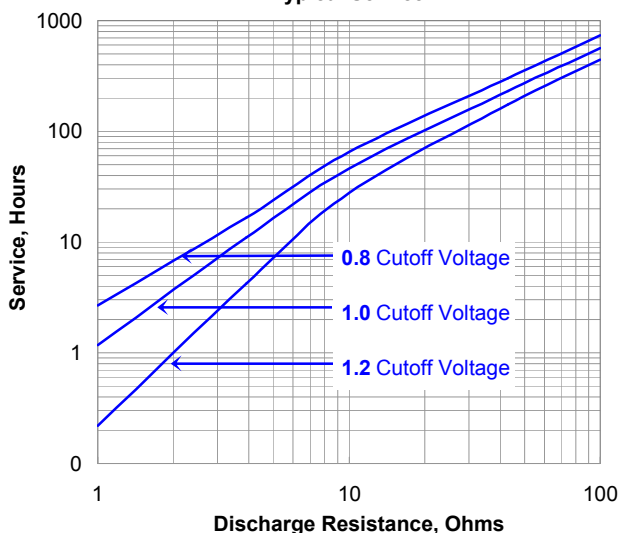

### CONSTANT CURRENT DISCHARGE Typical Service

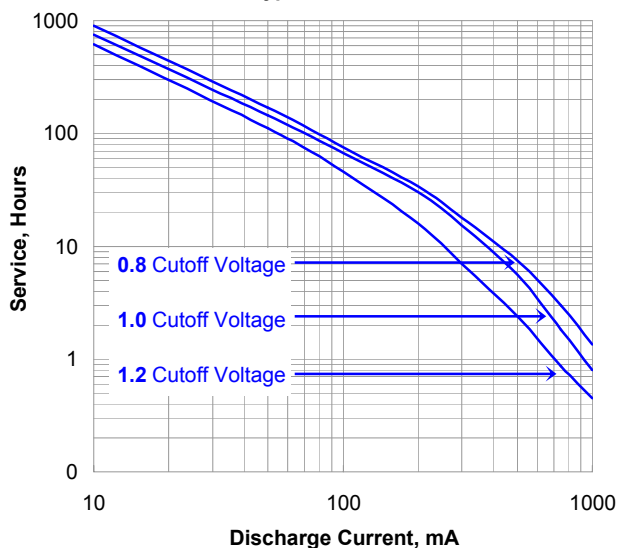

### Important Notice


This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. - All rights reserved


**ENERGIZER NO. EN93**

NEGATIVE COVER VIEW

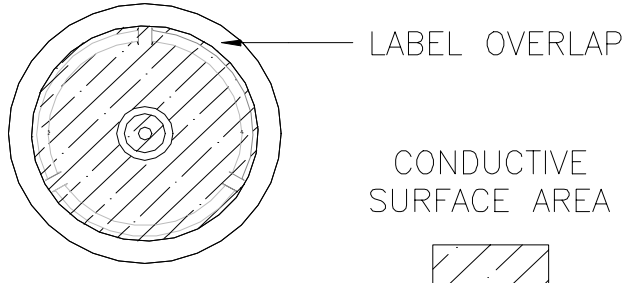


**Industry Standard Tests @ 20° C**

**TOY**  
3.9 ohm - 1 hr/day

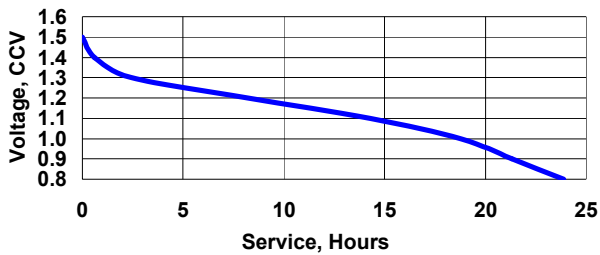


**PORTABLE LIGHTING**  
3.9 ohm - LIF

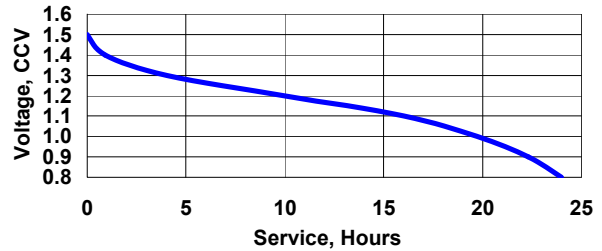

**PORTABLE STEREO**  
400 mA - 2 hr/day



**RADIO**  
20 ohm - 4 hr/day

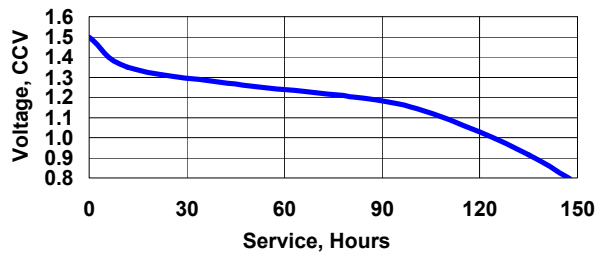

**Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. - All rights reserved