


# KR series

Power rocker switches

*Distinctive features*

## Attractive rugged rocker switch

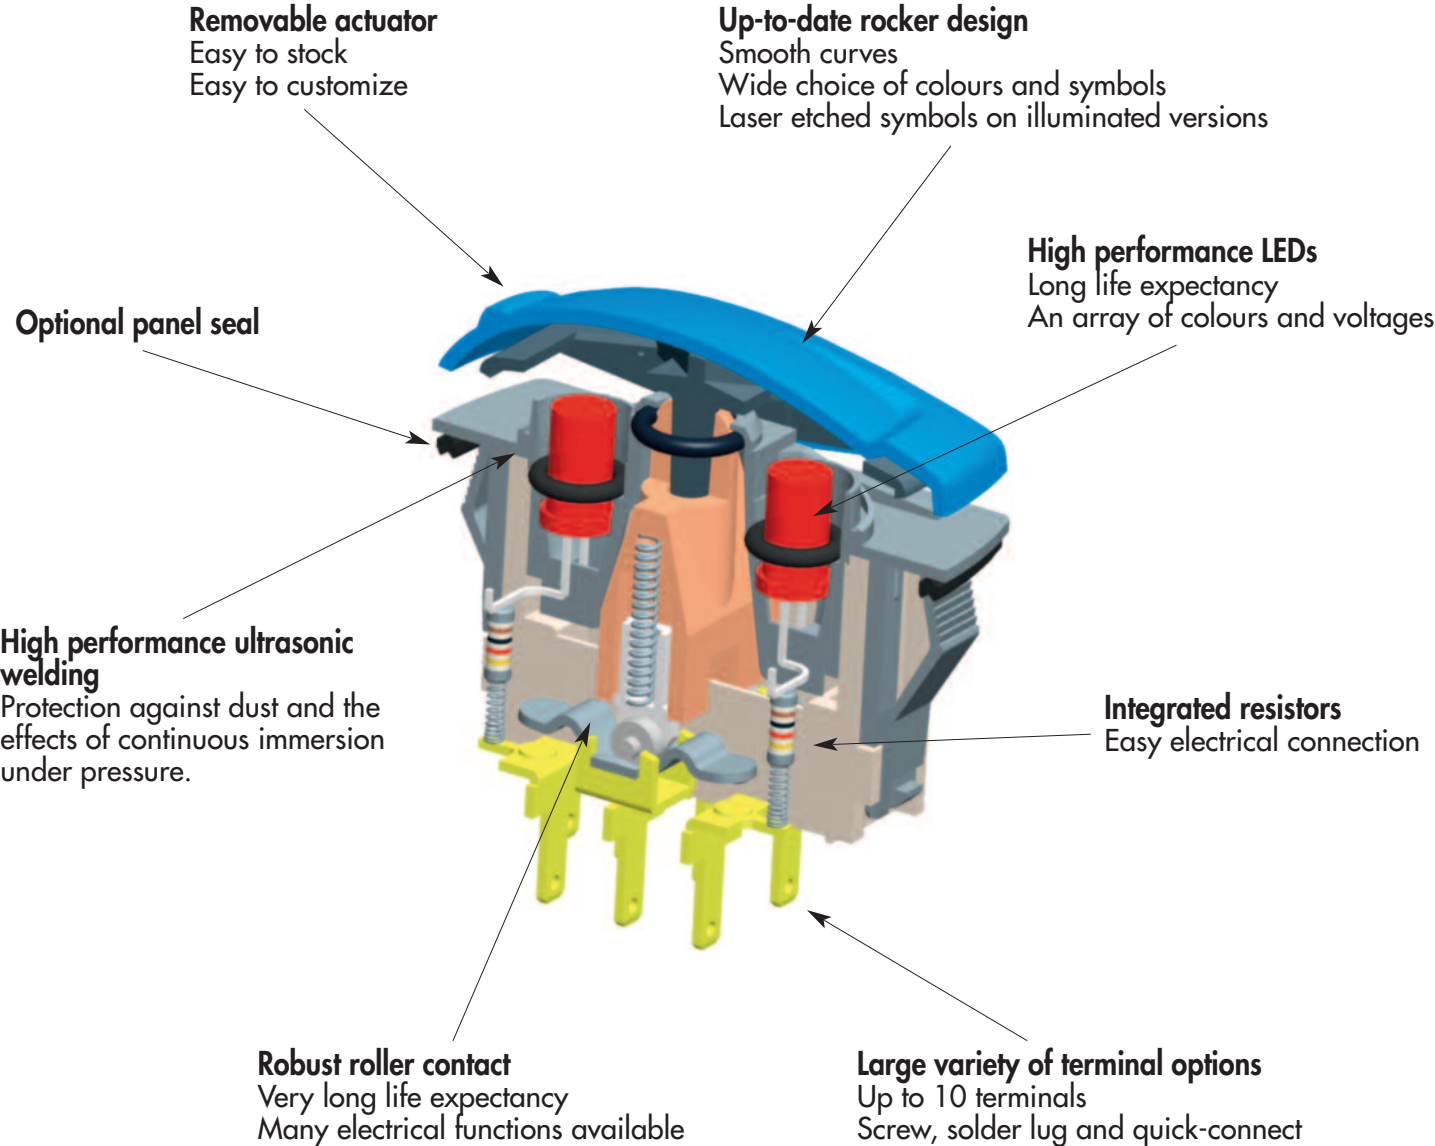

APEM will be happy to develop custom product solutions. Please contact us with your requirements.

# KR series

## Power rocker switches

### Specifications



- Unique rocker design
- Wide choice of colours
- Laser etched symbols
- Illuminated or non-illuminated
- Optionally sealed to IP68

#### ELECTRICAL SPECIFICATIONS

- Current/voltage rating with resistive load :
  - Silver contacts (A) : 5A 24VDC, 100.000 cycles  
10A 24VDC, 10.000 cycles (terminals 6.35 x 0.8 only)
  - Gold plated contacts (D) : 20mA 12V, 150.000 cycles
- Initial contact resistance : 10 mΩ max.
- Insulation resistance : 1.000 MΩ min. at 500VDC
- Dielectric strength : 2.000 Vrms 50 Hz min. between terminals
- Mechanical life : 150.000 cycles min.

#### ENVIRONMENTAL SPECIFICATIONS

- Degree of protection of sealed versions : frontal sealing to IP68 according to IEC 60529 (submersion under 1 meter of water for more than 30 minutes)
- Salt spray resistance : 96 hours according to IEC 512-6, test 11f
- Vibration resistance : 10-500 Hz / 10 g per IEC 60068-2-6
- Operating temperature : -40°C to +85°C

#### MATERIALS


- Case : PA 6-6
- Actuator : ABS
- Bezel : PA 6-6
- Terminals : brass, silver plated
- Contacts : silver (A)  
or silver, gold plated (D)
- Contact roller : brass, nickel plated

#### SEALING

Sealing is optional.  
To order a sealed product, complete the appropriate box of ordering format on the following pages.

#### DIMENSIONS

→ Flat seal

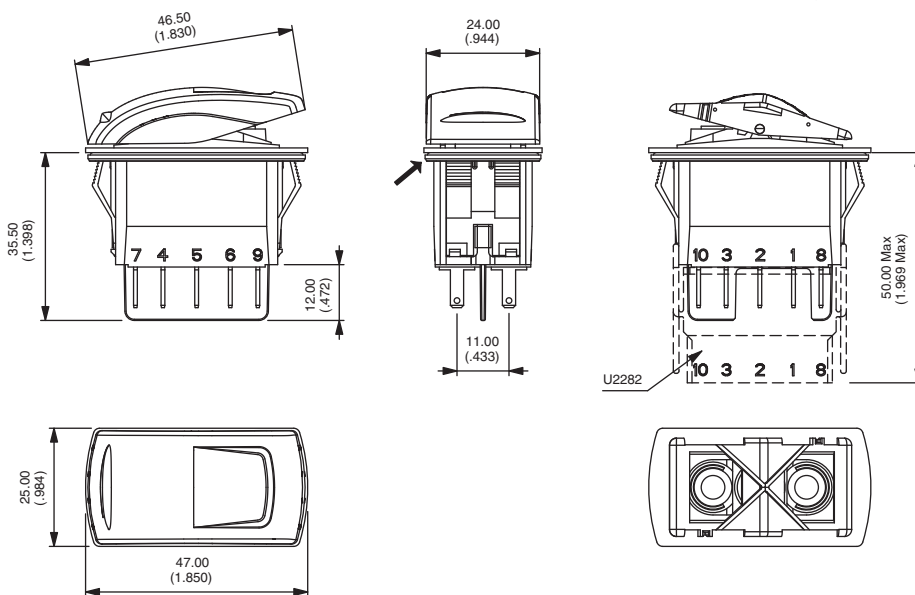

**Dimensions** : First dimensions are in mm while inches are shown as bracketed numbers.

**Tolerance** : The general tolerance for dimensions in this brochure is  $\pm 0,3$  (.012). Overall dimension tolerance is  $\pm 0,5$  (.020).



**Packaging unit** : 40 pieces

Dimensions, specifications and data shown in this brochure are subject to change without notice.

#### HOW TO ORDER

- To order a complete product, fill in all the boxes of the following order guide.
- To order case only (without actuator), finish your order number with the LED wiring code.
- To order actuator only (without case), begin the order number with code KRR, then follow the order format from "actuator type" until the end of the options.

#### CASE + LEADS

<b>KR</b>							Side A	Side B																																																																									
<b>SERIES</b>	<b>Electrical functions</b>		<b>Contacts</b>	<b>Sealing</b>	<b>LEDS</b>			<b>Wiring</b>																																																																									
<b>Poles</b>	<table border="1"> <tr><td>1</td><td>ON</td><td>-</td><td>OFF</td></tr> <tr><td>4</td><td>ON</td><td>ON</td><td>ON</td></tr> <tr><td>4-1R</td><td>ON</td><td>ON</td><td>MOM</td></tr> <tr><td>5</td><td>MOM</td><td>-</td><td>ON</td></tr> <tr><td>6</td><td>ON</td><td>-</td><td>ON</td></tr> <tr><td>7</td><td>MOM</td><td>OFF</td><td>MOM</td></tr> <tr><td>8</td><td>ON</td><td>OFF</td><td>MOM</td></tr> <tr><td>9</td><td>ON</td><td>OFF</td><td>ON</td></tr> </table>		1	ON	-	OFF	4	ON	ON	ON	4-1R	ON	ON	MOM	5	MOM	-	ON	6	ON	-	ON	7	MOM	OFF	MOM	8	ON	OFF	MOM	9	ON	OFF	ON	<table border="1"> <tr><td>A</td><td>Silver</td></tr> <tr><td>D</td><td>Gold plated</td></tr> </table>	A	Silver	D	Gold plated	<table border="1"> <tr><td>X</td><td>No</td></tr> <tr><td>K</td><td>Yes</td></tr> </table>	X	No	K	Yes	<table border="1"> <tr><td>X</td><td>None</td></tr> <tr><td>A</td><td>LED 6V red</td></tr> <tr><td>B</td><td>LED 6V green</td></tr> <tr><td>C</td><td>LED 6V yellow</td></tr> <tr><td>M</td><td>LED 6V blue</td></tr> <tr><td>R</td><td>LED 6V white</td></tr> <tr><td>D</td><td>LED 12V red</td></tr> <tr><td>E</td><td>LED 12V green</td></tr> <tr><td>F</td><td>LED 12V yellow</td></tr> <tr><td>N</td><td>LED 12V blue</td></tr> <tr><td>S</td><td>LED 12V white</td></tr> <tr><td>J</td><td>LED 24V red</td></tr> <tr><td>K</td><td>LED 24V green</td></tr> <tr><td>L</td><td>LED 24V yellow</td></tr> <tr><td>P</td><td>LED 24V blue</td></tr> <tr><td>T</td><td>LED 24V white</td></tr> </table>			X	None	A	LED 6V red	B	LED 6V green	C	LED 6V yellow	M	LED 6V blue	R	LED 6V white	D	LED 12V red	E	LED 12V green	F	LED 12V yellow	N	LED 12V blue	S	LED 12V white	J	LED 24V red	K	LED 24V green	L	LED 24V yellow	P	LED 24V blue	T	LED 24V white	See diagrams page 9.	
1	ON	-	OFF																																																																														
4	ON	ON	ON																																																																														
4-1R	ON	ON	MOM																																																																														
5	MOM	-	ON																																																																														
6	ON	-	ON																																																																														
7	MOM	OFF	MOM																																																																														
8	ON	OFF	MOM																																																																														
9	ON	OFF	ON																																																																														
A	Silver																																																																																
D	Gold plated																																																																																
X	No																																																																																
K	Yes																																																																																
X	None																																																																																
A	LED 6V red																																																																																
B	LED 6V green																																																																																
C	LED 6V yellow																																																																																
M	LED 6V blue																																																																																
R	LED 6V white																																																																																
D	LED 12V red																																																																																
E	LED 12V green																																																																																
F	LED 12V yellow																																																																																
N	LED 12V blue																																																																																
S	LED 12V white																																																																																
J	LED 24V red																																																																																
K	LED 24V green																																																																																
L	LED 24V yellow																																																																																
P	LED 24V blue																																																																																
T	LED 24V white																																																																																
<table border="1"> <tr><td>3</td><td>Single pole</td></tr> <tr><td>4</td><td>Double pole</td></tr> </table>	3	Single pole	4	Double pole			<b>Terminals</b>	<b>Terminals (continued)</b>																																																																									
3	Single pole																																																																																
4	Double pole																																																																																
		<table border="1"> <tr><td>0</td><td>6 terminals with barrier</td></tr> <tr><td>2</td><td>6 terminals with barrier</td></tr> <tr><td>4</td><td>6 terminals w/o barrier</td></tr> <tr><td>A</td><td>10 term. with barrier</td></tr> <tr><td>B</td><td>10 term. w/o barrier</td></tr> <tr><td>C</td><td>10 terminals for use with connector U2292</td></tr> <tr><td>Quick-connect 6,35x0,8</td><td></td></tr> <tr><td>3</td><td>6 terminals with barrier</td></tr> </table>		0	6 terminals with barrier	2	6 terminals with barrier	4	6 terminals w/o barrier	A	10 term. with barrier	B	10 term. w/o barrier	C	10 terminals for use with connector U2292	Quick-connect 6,35x0,8		3	6 terminals with barrier	<table border="1"> <tr><td>5</td><td>6 terminals w/o barrier</td></tr> <tr><td>D</td><td>10 term. with barrier</td></tr> <tr><td>E</td><td>10 term. w/o barrier</td></tr> <tr><td>F</td><td>10 term. for use with connector U2292</td></tr> <tr><td>Quick-connect 2,8x0,8</td><td></td></tr> <tr><td>G</td><td>10 term. with barrier</td></tr> <tr><td>H</td><td>10 term. w/o barrier</td></tr> <tr><td>J</td><td>10 terminals for use with connector U2282</td></tr> </table>	5	6 terminals w/o barrier	D	10 term. with barrier	E	10 term. w/o barrier	F	10 term. for use with connector U2292	Quick-connect 2,8x0,8		G	10 term. with barrier	H	10 term. w/o barrier	J	10 terminals for use with connector U2282																																													
0	6 terminals with barrier																																																																																
2	6 terminals with barrier																																																																																
4	6 terminals w/o barrier																																																																																
A	10 term. with barrier																																																																																
B	10 term. w/o barrier																																																																																
C	10 terminals for use with connector U2292																																																																																
Quick-connect 6,35x0,8																																																																																	
3	6 terminals with barrier																																																																																
5	6 terminals w/o barrier																																																																																
D	10 term. with barrier																																																																																
E	10 term. w/o barrier																																																																																
F	10 term. for use with connector U2292																																																																																
Quick-connect 2,8x0,8																																																																																	
G	10 term. with barrier																																																																																
H	10 term. w/o barrier																																																																																
J	10 terminals for use with connector U2282																																																																																

#### ACTUATOR

<b>Type</b>	<b>Colour</b>																								
<table border="1"> <tr><td>1</td><td>For non-illuminated application</td></tr> <tr><td>2</td><td>For illuminated application</td></tr> </table>	1	For non-illuminated application	2	For illuminated application	<table border="1"> <tr><td>1</td><td>Blue</td></tr> <tr><td>1/4</td><td>Dark blue</td></tr> <tr><td>2</td><td>Black</td></tr> <tr><td>3</td><td>Green</td></tr> <tr><td>4</td><td>Grey</td></tr> <tr><td>5</td><td>Yellow</td></tr> <tr><td>6</td><td>Red</td></tr> <tr><td>7</td><td>Ivory</td></tr> <tr><td>9</td><td>Orange</td></tr> <tr><td>A</td><td>Aluminium bright</td></tr> </table>	1	Blue	1/4	Dark blue	2	Black	3	Green	4	Grey	5	Yellow	6	Red	7	Ivory	9	Orange	A	Aluminium bright
1	For non-illuminated application																								
2	For illuminated application																								
1	Blue																								
1/4	Dark blue																								
2	Black																								
3	Green																								
4	Grey																								
5	Yellow																								
6	Red																								
7	Ivory																								
9	Orange																								
A	Aluminium bright																								

#### ACTUATOR MARKING

	Area A	Area M	Area B									
<b>Orientation</b>	<b>Symbols</b>											
<table border="1"> <tr><td>N</td><td></td></tr> <tr><td>O</td><td></td></tr> <tr><td>S</td><td></td></tr> <tr><td>E</td><td></td></tr> </table>	N		O		S		E		<table border="1"> <tr><td></td></tr> </table>			
N												
O												
S												
E												
	<p><b>Symbols</b> : see page 31.  <b>Accessories</b> : see page 34.</p>											




**NOTICE** : please note that not all combinations of above numbers are available. Refer to the following pages for further information.


# KR series

## Power rocker switches

### Case

- To order case only (without rocker), finish your order number with the LED wiring code.






		2-3		1-2
		5-6		4-5
Single pole	Double pole			
<b>KR31</b>	<b>KR41</b>	ON	-	OFF
	<b>KR44*</b>	ON	ON	ON
	<b>KR44-1R*</b>	ON	ON	MOM
<b>KR35</b>	<b>KR45</b>	MOM	-	ON
<b>KR36</b>	<b>KR46</b>	ON	-	ON
<b>KR37</b>	<b>KR47</b>	MOM	OFF	MOM
<b>KR38</b>	<b>KR48</b>	ON	OFF	MOM
<b>KR39</b>	<b>KR49</b>	ON	OFF	ON

Bottom view


Contact area



LED area

10 terminal version

Contact & LED area






























6 terminal version

\* Function 4 : single pole in double pole case

### ELECTRICAL FUNCTIONS AND CONNECTIONS

In the tables below, terminal connections as viewed from bottom of switch.  
Only the contact area is represented.  
For single pole models, only terminals 1, 2 and 3 are to be considered (not terminals 6, 5, 4).

x = w/o terminal  
o = with terminal  
▲ = momentary

	Positions				Positions		
							
Function 1 * KR31-KR41				Function 8 KR38-KR48			
Function 5 KR35-KR45				Function 9 KR39-KR49			
Function 6 KR36-KR46				Function 4 KR44			
Function 7 KR37-KR47				Function 4-1R KR44-1R			

\* Function 1 only available for 6 terminal versions.


# KR series

## Power rocker switches


### Case

#### TERMINALS


CASE + LEDS




#### Screw





#### Solder lug / quick-connect

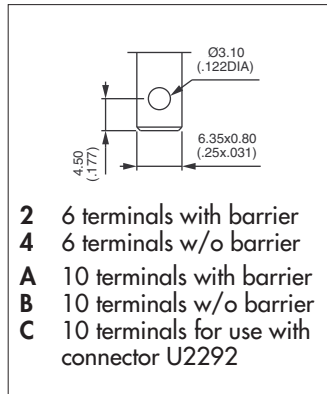

#### Normalized quick-connect 6,35x0,8

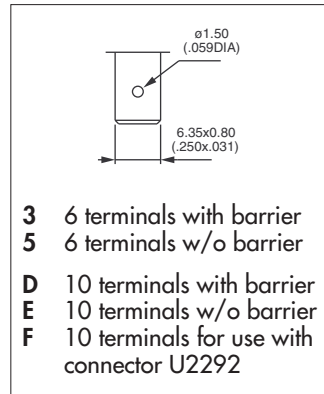

#### Normalized quick-connect 2,8x0,8

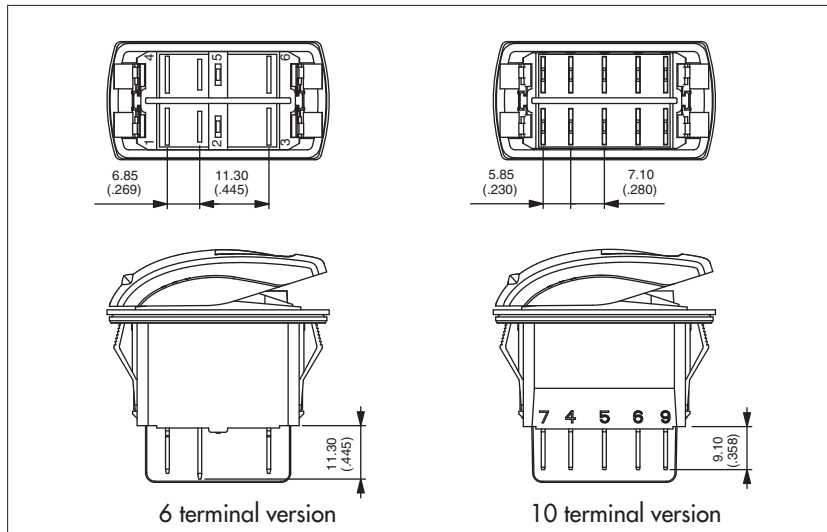


Terminals are marked on the case.

The drawings show the maximum possible number of terminals.

#### CONTACT MATERIALS

CASE + LEDS




- A** Silver
- D** Silver, gold plated

# KR series

## Power rocker switches

### Case - LEDs


#### SEALING




- X No sealing
- K IP68 (switch assembled on panel)

Ultrasonic welding of frame to case is standard on all versions.  
The ultrasonic welding and the optional panel seal prevent water and dust from introducing into the switch housing.

*The product shall be installed professionally.  
Test conditions available on request.*

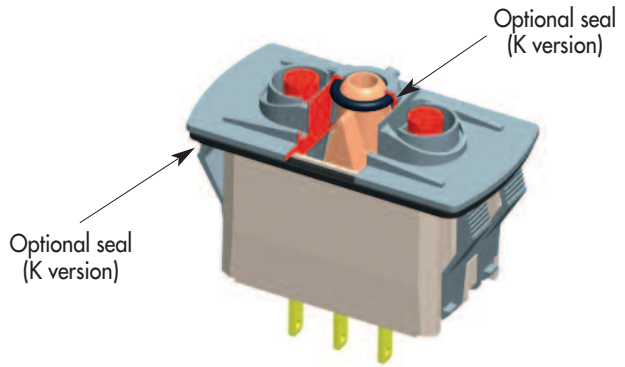

#### LEDS

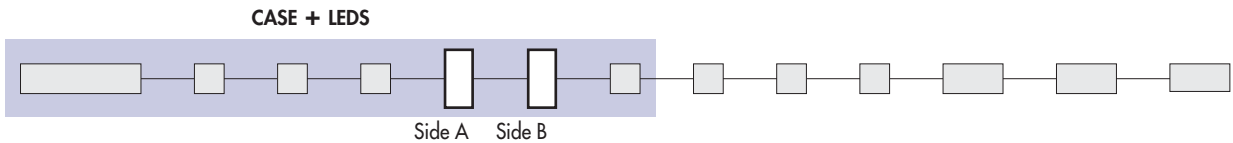


Complete each enlarged box with one of the codes listed below.

- X Without LED

	Red	Green	Yellow	Blue	White
6VDC	A	B	C	M	R
12VDC	D	E	F	N	S
24VDC	J	K	L	P	T

LED consumption : 20mA @ nominal voltage (25°C)


Other illumination solutions : on request.

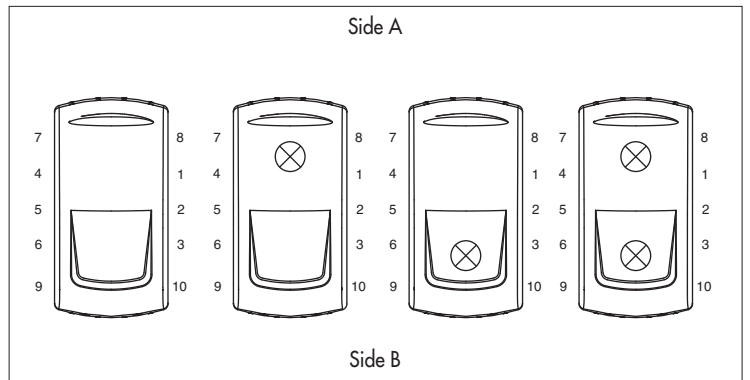

#### WIRING




The LED wiring diagram is shown on the case.

#### CASE + LEDs






#### • For 6 terminal versions

LED connected to the load

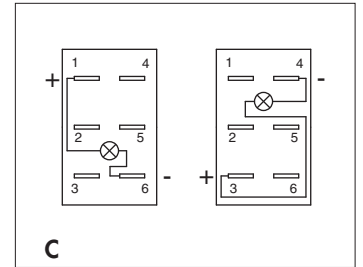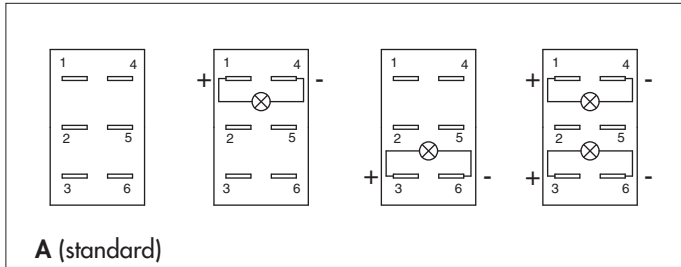


Note : If not available, terminals are added to connect the LED.

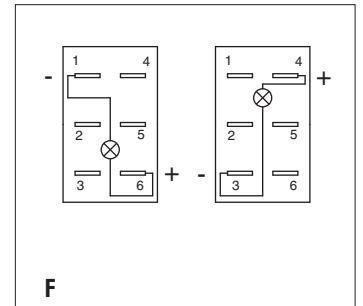


#### • For 10 terminal versions

Independent LED or integrated functions

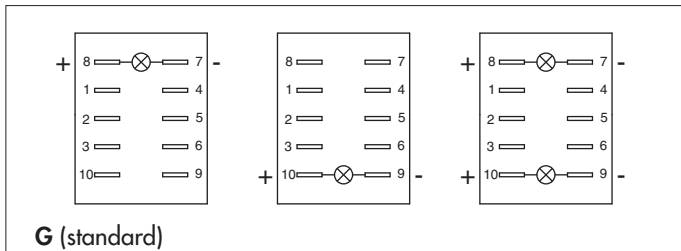


To have independent LEDs.

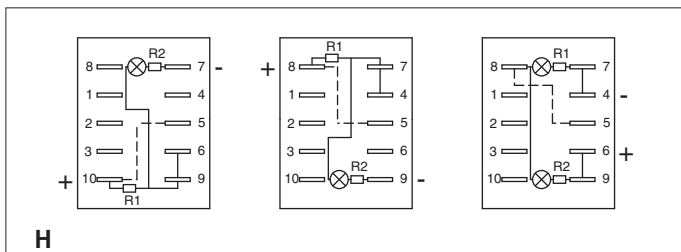

To obtain 2 symbol illumination levels (night illumination when OFF and higher illumination when ON).

*Dotted line = external wiring, continuous line = internal wiring*

Available in Single Pole only, with H and J quick-connect terminals.

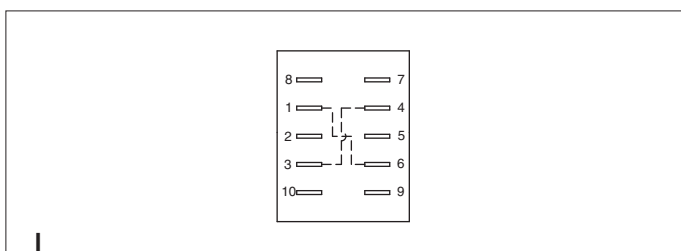

To have a polarity inversion (typical application : fan motor).

*Dotted line = internal wiring, continuous line = internal wiring*

Power supply between 2 and 5 - Load between 1 and 4 or 3 and 6. Available with H and J quick-connect terminals.

Please contact us for other wiring solutions.


# KR series

## Power rocker switches

### Actuator - Marking


To order actuator only (without case), begin the order number with code KRR, then follow the order format from "actuator type" until the end of the options.

#### ACTUATOR TYPE



- 1 For non-illuminated application
  - 2 For illuminated application
- Other rocker design : on request.

#### ACTUATOR COLOUR



Code	Colour
1	Blue
1/4	Dark blue
2	Black
3	Green

Code	Colour
4	Grey
5	Yellow
6	Red
7	Ivory

Code	Colour
9	Orange
A	Aluminium bright



Note : colour 7 not available on illuminated versions.

A **soft-touch varnish** can be added. Consult us.



#### MARKING ORIENTATION


If no marking required, leave box blank.

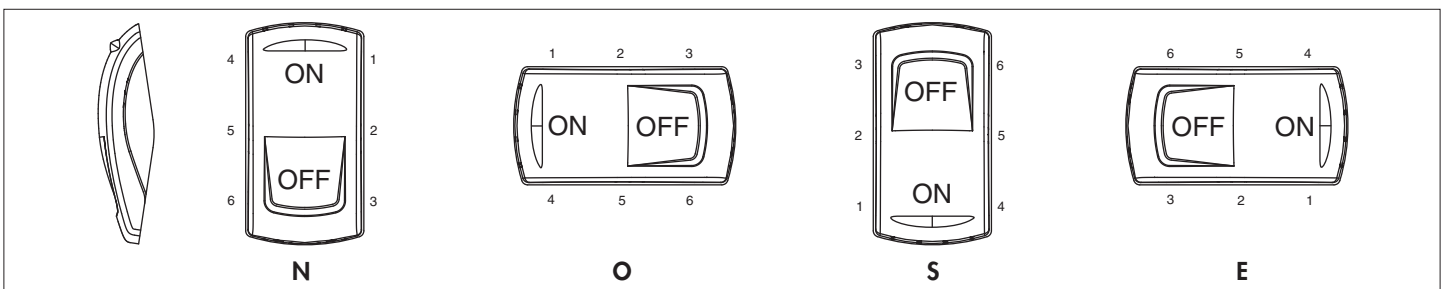

Other orientations : on request



#### SYMBOLS



Available symbols : see page 31.

#### Marking colour

White marking for illuminated rockers (laser etching) and non-illuminated black rockers (pad printing). Black marking for non-illuminated colour rockers (pad printing). Other : on request.



#### Laser etching resistance

- Water and petrol resistant according to EN61058-1
- Tear resistant (cross-cut test) according to NF ISO 2409 : class 0
- UV resistant according to ISO 4892-2

#### Marking area


For illuminated versions. The symbol will be included in the hatched area.

Marking in M are : on request.

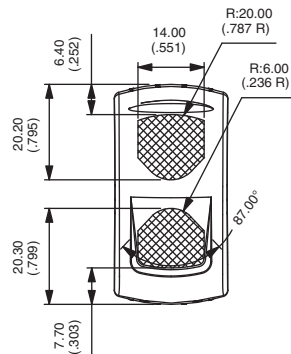

#### SWITCH PANEL CUT-OUT

Panel thickness : 0,8 mm to 4,6 mm  
Recommended panel thickness :  
between 2 mm and 3,5 mm



#### MATRIX MOUNTING

