

LPF-self-contained 75Ω driver

BD7600FV

BD7600FV is an IC developed for digital still camera. 75Ω driver consists of 9dB amplifier with LPF. Input is sink chip clamp input. 8dB amplifier is incorporated as a video signal amplifier.

●Application

Digital still camera

●Features

- 1) 75Ω driver with 9dB amplifier
- 2) With built-in LPF (Tertiary LPF, $f_c=7.7\text{MHz}$)
- 3) With built-in 8dB video-signal amplification circuit
- 4) Built-in standby function
- 5) Small package (SSOP-B8)

●Absolute maximum rating (Ta=25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	Vcc	8	V
Allowable loss	Pd	350*	mW
Operating temperature range	Topr	-30 to +85	°C
Storage temperature range	Tstg	-55 to +125	°C

*Reduce 3mW per 1°C increment when Ta exceeds 25°C.


●Recommended working voltage range (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage range	Vcc	4.5	5.0	5.5	V

*It is not of radiation-resistant design.

Multimedia IC





●Block diagram

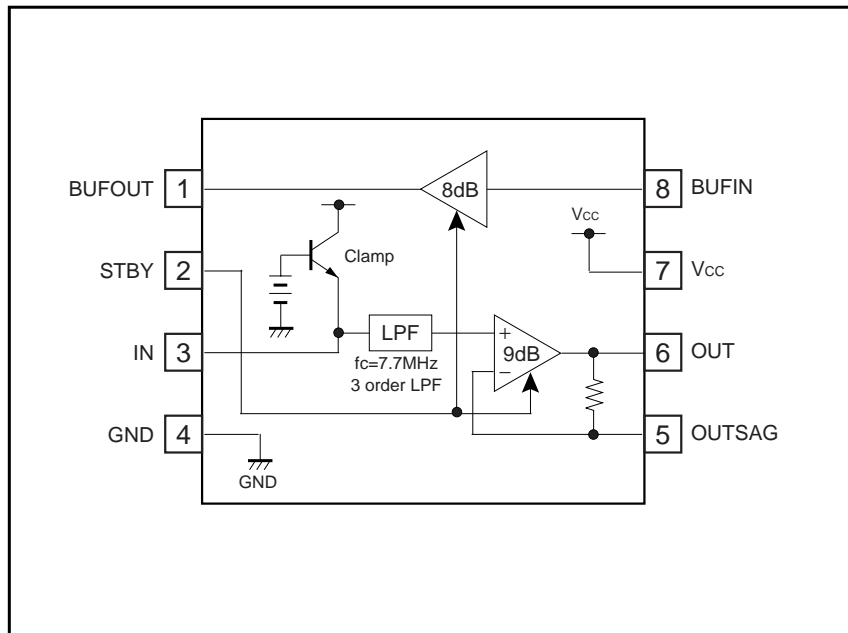

●Terminal explanation and input / output equivalent circuit diagram

Pin No.	Pin name	Terminal voltage	Equivalent circuit diagram	Function
1	BUFOUT	-		Signal output terminal
2	STBY	-		Standby control terminal When this terminal is set to "L", standby state will appear.
3	IN	1.50V		Signal input terminal It provides sinktip clamp input. Use an input coupling capacitor of 0.1μF to 0.47μF.

Multimedia IC

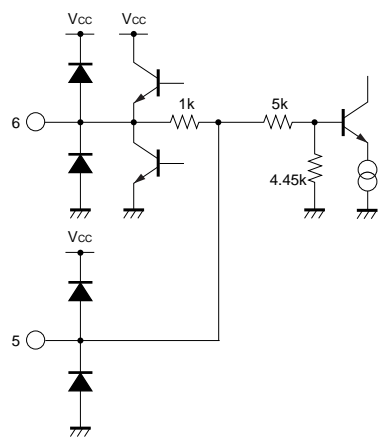Pin No.	Pin name	Terminal voltage	Equivalent circuit diagram	Function
4	GND	-		Grounding terminal
5	OUTSAG	0.80V		Terminal for sag compensation terminal Insert a capacitor between pins 5 and 6 to increase low-range gain.
6	OUT	0.65V		Signal output terminal
7	Vcc	5.00V		Power-supply terminal
8	BUFIN	-		Signal input terminal D-range of the input terminal is approx. 1.0 volt. Because no bias DC voltage is applied to this terminal, a suitable bias DC voltage meeting the input signal should be applied externally.

Multimedia IC

●Electrical characteristics (Ta=25°C, Vcc=5V unless otherwise stated)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
<Circuit current>						
Circuit current1	Icc1	6.5	11.0	15.5	mA	No-signal / Icc
Circuit current2	Icc2	–	0	5	μA	Standby / Icc
<75Ω driver unit>						
Maximum output level	Vom1	2.6	3.0	–	V _{P-P}	f=1kHz, THD=1% / Vo2a
Voltage gain	Gv1	2.2	3.0	3.8	dB	f=1MHz, 1.0V _{P-P} /Vo2b
Frequency characteristics1	Gf11	-2.3	-0.8	0.3	dB	f=5MHz / 1MHz, 1.0V _{P-P} / Vo2b
Frequency characteristics2	Gf12	-11.3	-6.6	-2.8	dB	f=10MHz / 1MHz, 1.0V _{P-P} / Vo2b
<8dB AMP unit>						
Maximum output level	Vom2	3.2	3.6	–	V _{P-P}	f=1kHz, THD=1%, Vbias=0.9V / Vo1
Voltage gain	Gv2	7.3	8.0	8.7	dB	f=1MHz, 0.28V _{P-P} , Vbias=0.9V / Vo1
Frequency characteristics	Gf2	-1.0	0.0	1.0	dB	f=7MHz, 0.28V _{P-P} , Vbias=0.9V / Vo1
<Standby function>						
STBY select level "H"	Vthh	2.2	–	Vcc	V	
STBY select level "L"	Vthl	0	–	0.7	V	

●Design guarantee items (Ta=25°C, Vcc=5V unless otherwise stated)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
<75Ω driver unit>						
Differential gain	DG1	–	1.0	2.0	%	Vo2b=1.0V _{P-P} , Standard staircase signal
Differential phase	DP1	–	0.5	2.0	deg	Vo2b=1.0V _{P-P} , Standard staircase signal
<8dB AMP unit>						
Differential gain	DG2	–	1.0	2.0	%	Vo1=1.0V _{P-P} , Standard staircase signal
Differential phase	DP2	–	0.5	2.0	deg	Vo1=1.0V _{P-P} , Standard staircase signal

●Standby switch mode setting table

H	NORMAL
L	STAND-BY

Multimedia IC

●Example of application circuit

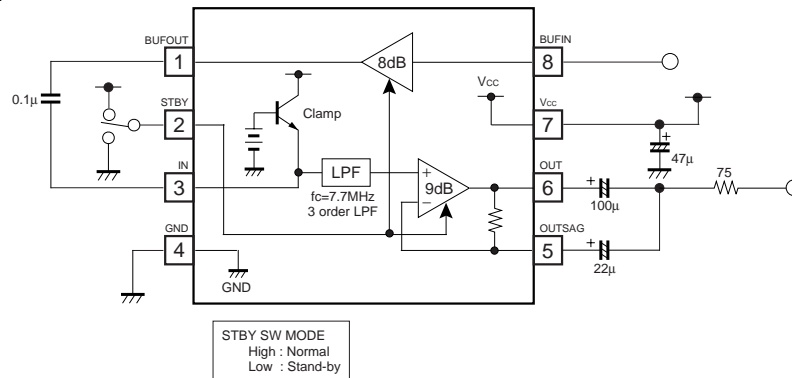


Fig.2

●Electrical characteristic curves

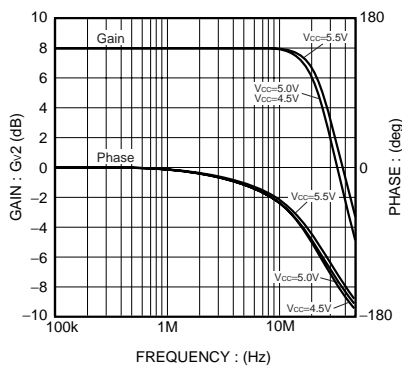


Fig.3 8dB AMP unit frequency characteristics


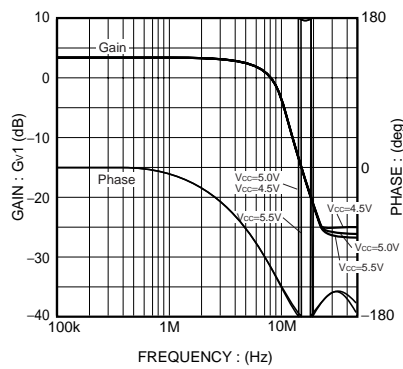


Fig.4 75Ω driver unit frequency characteristics

●External dimensions (Unit : mm)

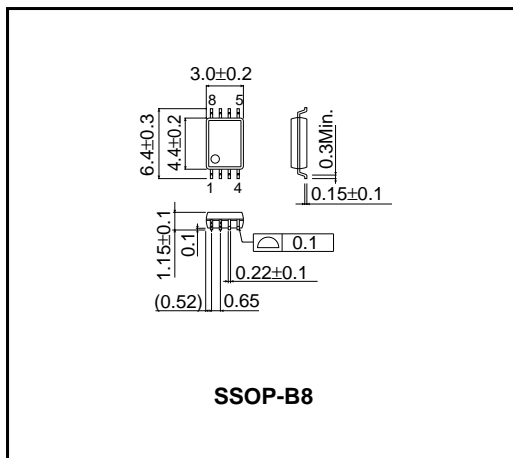

SSOP-B8

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.