



SMA Male to SMA Female Semi-Flexible Precision Cable Using PE-SR405FLJ Coax, RoHS

TECHNICAL DATA SHEET

PE39432

Hand Formable SMA Male to SMA Female Semi-Flexible Precision Cable Using PE-SR405FLJ Coax, RoHS

Pasternack's formable cable assemblies are hand formable semi-rigid replacements that are an alternative to costly preformed assemblies. The formable semi-rigid cable alternatives are dimensionally and electrically similar to their semi-rigid counterpart and have a tinned-copper-braid outer shield that provides excellent RF shielding. The hand formable cable assemblies from Pasternack do not require special tooling to shape or reshape the assemblies and can replace standard semi-rigid versions. The assemblies are available with or without a PVC jacket and are RoHS compliant,

- Dimensionally and electrically the same as standard, solid outer conductor semi-rigid coax
- Cable may be formed by hand and does not require special tools to bend
- May be formed more than once without damaging the outer conductor
- High RF Shielding >100 dB
- 100% Hi-pot and continuity tested
- 100% VSWR tested to max frequency of assembly
- Standard and custom lengths ship the same day

Configuration

| | |
|-------------|-------------|
| Connector 1 | SMA Male |
| Connector 2 | SMA Female |
| Cable Type | PE-SR405FLJ |

Electrical Specifications

| | |
|---------------------------------|----------|
| Frequency Range, GHz | DC to 18 |
| Impedance, Ohms | 50 |
| Maximum VSWR | 1.5:1 |
| Velocity of Propagation, % | 69 |
| RF Shielding, dB | 100 |
| Maximum Operating Voltage, Vrms | 335 |

Typical Performance by Frequency

Frequency 1

| | |
|----------------|---------------------------|
| Frequency, MHz | 1000 |
| Insertion Loss | 0.225 dB/ft [0.74 dB/m] |

Frequency 2

| | |
|----------------|--------------------------|
| Frequency, GHz | 5 |
| Insertion Loss | 0.549 dB/ft [1.8 dB/m] |

Frequency 3

| | |
|----------------|---------------------------|
| Frequency, GHz | 10 |
| Insertion Loss | 0.812 dB/ft [2.66 dB/m] |

Frequency 4

| | |
|----------------|--------------------------|
| Frequency, GHz | 18 |
| Insertion Loss | 1.18 dB/ft [3.87 dB/m] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Semi-Flexible Precision Cable Using PE-SR405FLJ Coax, RoHS PE39432](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMA Male to SMA Female Semi-Flexible Precision Cable Using PE-SR405FLJ Coax, RoHS

TECHNICAL DATA SHEET

PE39432

Mechanical Specifications

Cable Assembly

Cable Type PE-SR405FLJ

Temperature

Temperature Operating Range, deg C -55 to +125
 Diameter, in [mm] 0.098 [2.49]
 Cable Color Black
 One Time Minimum Bend Radius, in [mm] 0.37 [9.4]
 Repeated Minimum Bend Radius, in [mm] 0.787 [19.99]

Cable

Center Conductor Type Solid
 Cable Inner Conductor Copper Clad Steel, Silver
 No of Shields 1
 Dielectric Type PTFE
 Jacket Material FEP
 Jacket Diameter, in [mm] 0.098 [2.49]

Connector 1

Type SMA Male
 Configuration Straight

Connector 2

Type SMA Female
 Configuration Straight

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes

Plotted and Other Data

Notes: Values at 25 °C, sea level

SMA Male to SMA Female Semi-Flexible Precision Cable Using PE-SR405FLJ Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Semi-Flexible Precision Cable Using PE-SR405FLJ Coax, RoHS PE39432](http://www.pasternack.com/sma-male-sma-female-pe-sr405flj-cable-assembly-pe39432-p.aspx)


URL: <http://www.pasternack.com/sma-male-sma-female-pe-sr405flj-cable-assembly-pe39432-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



PE39432 CAD Drawing

SMA Male to SMA Female Semi-Flexible Precision Cable Using PE-SR405FLJ Coax, RoHS

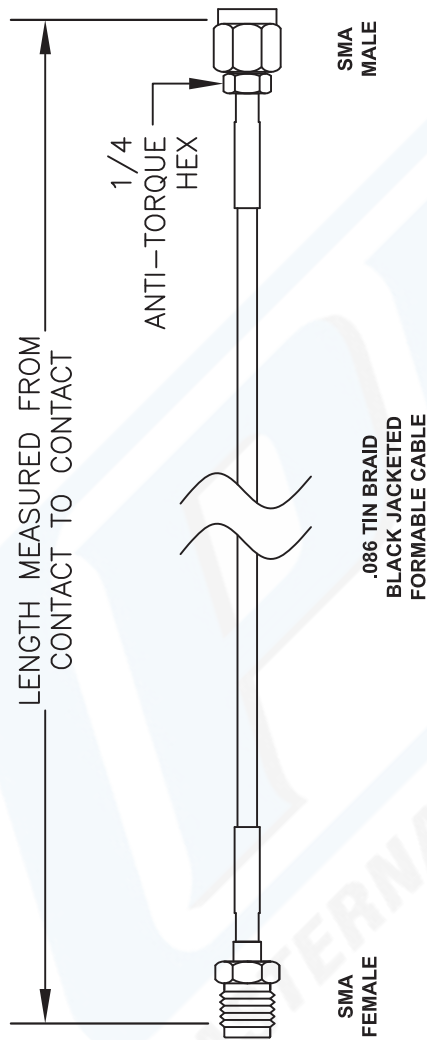

Note: This part is lead free.

| Part Number Configuration | | How To Order | |
|---------------------------|--|--------------|------------------|
| PE3 | zzz yv - xx uu | Part # Ext. | Length In Inches |
| 00 - 99999 | LF = Lead Free < Blank > = Standard | -12 | 12" |
| | Note: LF applies only to RF cables | -24 | 24" |
| | | -36 | 36" |
| | | -48 | 48" |
| | | -60 | 60" |
| | | -xx | Custom Length |
| | | -25CM | 25Cm |
| | | -50CM | 50Cm |
| | | -75CM | 75Cm |
| | | -100CM | 100Cm |
| | | -125CM | 125Cm |
| | | -xxCM | Custom Length |



PASTERNAK ENTERPRISES®
ESTABLISHED 1972

PASTERNAK ENTERPRISES, INC.
P.O. BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE
PE39432

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES (mm).
 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

| | | | | | |
|--------|----------------|-----------------|-----------|--------|------|
| REV. - | FSCM NO. 53919 | CAD FILE 041912 | SCALE N/A | SIZE A | 2231 |
|--------|----------------|-----------------|-----------|--------|------|