




TAPED LED LAMP

SELECTIONGUIDE :

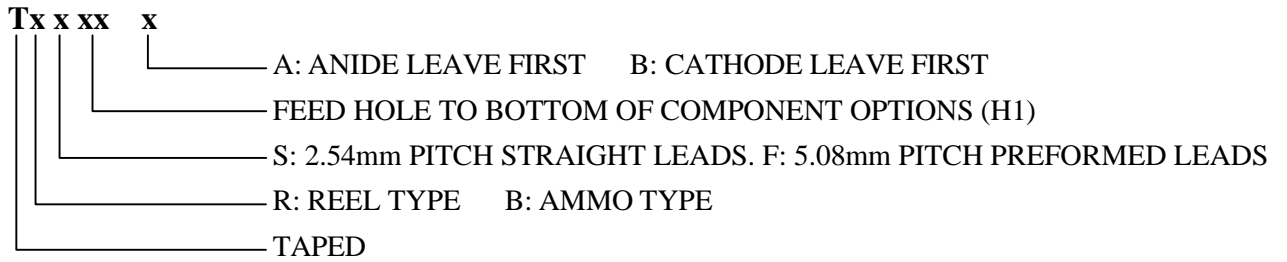

REEL TYPE :

ITEM	SYMBOL	SPECIFICATION			
		Minimum		Maximum	
		mm	inch	mm	inch
Reel Diameter	D	78.20	3.079	380.00	14.96
Core Diameter	D1	34.90	1.374	102.00	4.02
Hub Recess Inside Diameter	D2	28.60	1.126	88.00	3.47
Arbor Hole Diameter	D3	13.80	0.543	38.10	1.50
Overall Reel Thickness	T	-	-	57.20	2.25
Inside Reel Flange Thick	T1	30.00	1.181	50.00	1.97

AMMO TYPE :


ITEM	SYMBOL	SPECIFICATION			
		Minimum		Maximum	
		mm	inch	mm	inch
Overall Length	L	325.00	12.80	340.00	13.40
Overall Width	W	245.00	9.65	276.00	10.87
Overall Thickness	H	50.00	1.97	60.00	2.36




TAPED LED LAMP

ITEM	SYMBOL	SPECIFICATION				
		Minimum		Maximum		
		mm	inch	mm	inch	
Tape Feed Hole Diameter	D	3.80	0.149	4.20	0.165	
Component Lead Pitch	Straight Leads	2.30	0.091	3.00	0.118	
	Preformed Lead	4.80	0.188	5.80	0.228	
Front To Rear Deflection	ΔH	-	-	2.00	0.078	
Feed Hole To Seating Plane	H	14.50	0.571	15.50	0.610	
Feed Hole To Bottom Of Component	Straight Leads	TxS18x	17.50	0.689	18.50	0.728
		TxS22x	21.50	0.846	22.50	0.886
		TxS26x	25.50	1.004	26.50	1.043
	Preformed Leads	TxF18x	17.50	0.689	18.50	0.767
		TxF20x	19.50	0.748	20.50	0.826
		TxF23x	22.0	0.886	23.50	0.965
Feed Hole To Overall Component	H2	-	-	32.00	1.259	
Lead Length After Component Height	L	W0		11.00	0.433	
Feed Hole Pitch	P	12.40	0.488	13.00	0.511	
Lead Location	Straight Leads	P1	4.40	0.173	5.80	0.228
	Preformed Leads		3.15	0.124	45.5	0.179
Center Component Location	P1	5.05	0.198	7.56	0.301	
Overall Taped Package Thickness	T	-	-	1.42	0.056	
Feed Hole Location	W0	8.50	0.334	9.75	0.384	
Adhesive Tape Width	W1	14.50	0.571	15.50	0.610	
Adhesive Tape Position	W2	0	0	4.00	0.157	
Taped Width	W3	17.50	0.689	19.00	0.748	

TxSxxx (2.54 PITCH STRAIGHT LEADS)

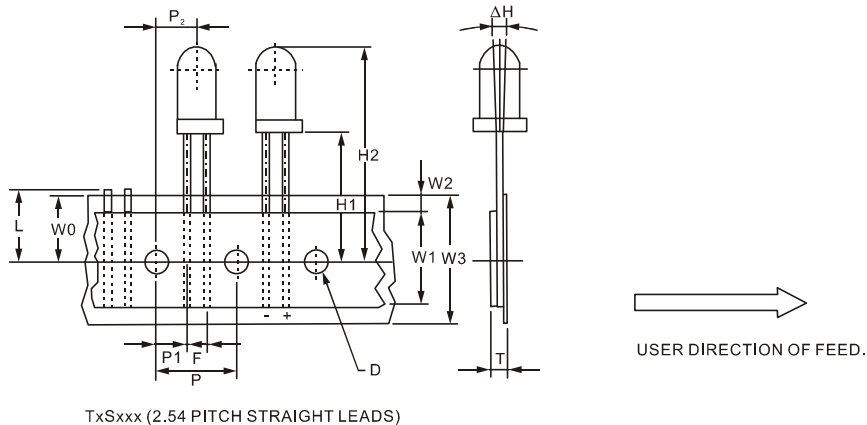

TxFxxx (5.08 PITCH PREFORMED LEADS)

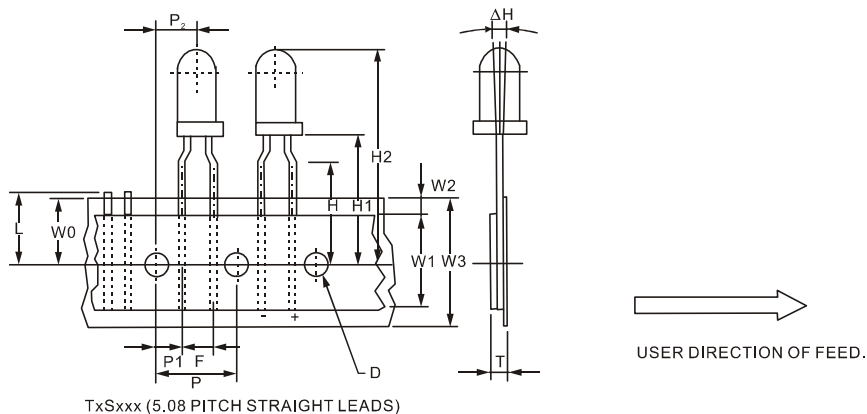

- Notes: 1. The permission of fallen off is within continous 3 pcs.
 2. The edge of the tape has the space longer than at last 4 LEDS.